


DATE	SYM	REVISION	RECORD	AUTH.	DR.	CK.
11/20/00	-	ISSUED			NT	DG

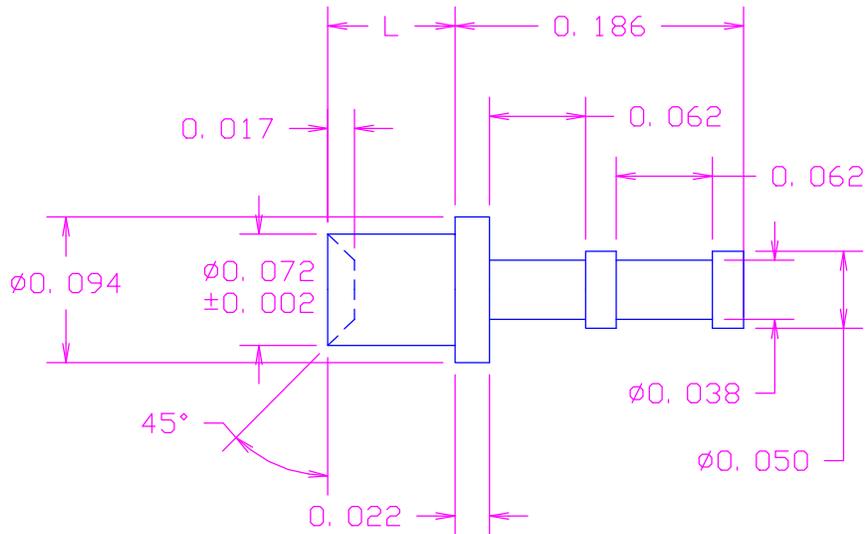

RECOMMENDED MOUNTING HOLE .076 DIA. (#48 DRILL)


MATERIAL: BRASS PER ASTM B16,  
ALLOY C 36000, 1/2 HARD

FINISH(XX): (01)- .0003"MIN. SILVER PER QQ-S-365,  
TYPE II, GRADE A WITH NON-CHROMATE  
PRESERVATIVE

(05)- .0003"MIN. ELCTRO-SOLDER PER  
MIL-P-81728, OVER .0001"MIN. COPPER

PART NUMBER:	L:
10-201-1-XX	.051
10-201-2-XX	.082
10-201-3-XX	.113
10-201-4-XX	.145
10-201-6-XX	.207
10-201-8-XX	.270

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)	CONCORD ELECTRONICS CORPORATION		
DECIMAL ± .005	P/N	SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL ± 1/64	TITLE TERMINAL		
ANGULAR ± 5°	DATE 11/20/00	DRAWING NUMBER 10-201-X-XX PLATING	