
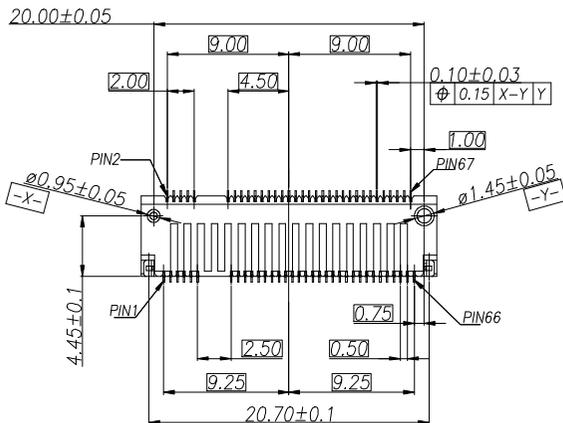





HF
Halogen Free

RoHS

DATE CODE
SEE NOTES 4




- NOTES:
 1.MATERIAL:
 1.1.HOUSING: LCP HIGH TEMPERATURE THERMOPLASTIC,UL94V-0,COLOR:BLACK
 1.2.CONTACTS: COPPER ALLOY;
 1.3.PEG: STAINLESS STEEL.
 2.REFLOW SOLDER CAPABLE TO 260°C.
 3.FINISH:
 CONTACT:
 50u" MIN NICKEL UNDERPLATING OVERALL.
 CONTACT AREA: GOLD PLATED (SEE TABLE)
 SOLDER AREA: GOLD FLASH 1u" MIN.
 PEG:
 50u" MIN. NICKEL UNDERPLATING OVERALL.
 80u" MIN. MATTE-TIN PLATED ON SURFACE.

4. DATE CODE : YYWWDLX
 YY: YEAR (09: 2009)
 WW: WEEK (25: THE 25TH WEEK)
 D: DAY (1~7: SUNDAY~SATURDAY)
 L: LINE NUMBER OF ASSEMBLY (A: LINE A)
 X: D OR N (D: DAY; N: NIGHT)

- 5.PRODUCT SPECIFICATION SEE FCI GS-12-1195
 6.PART NO: 10128796-0 0 X R LF

- LEAD FREE & RoHS COMPLIANCE
 PACKING OPTION
 R:TAPE&REEL
 GOLD PLATING
 1:GOLD FLASH
 4:Au 15u"
 5:Au 30u"

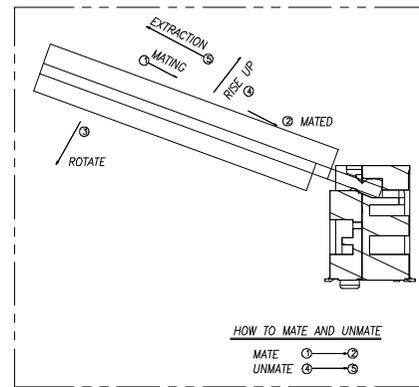




30u" Au	10128796-005RLF
15u" Au	10128796-004RLF
GOLD FLASH	10128796-001RLF
CONTACT AREA	FCI P/N

mat'l. code		surface		tolerance		projection		product family	
ltr		ecn no		dr		date		title	
A		BF		2013-04-18		2013-04-18		M.2 CONNECTOR 8.5H_STD_KEY B	
B		ELX-T-19318		TAI		2014-11-10			
				angles		.X ±0.3			
						.XX ±0.25			
				X°±2°		.XXX ±0.05			
				dr		BEER FU 2013-05-02		dwg no	
				enr		BEER FU 2013-05-02		sheet 1 of 3	
				chr		BEER FU 2013-05-02		size	
				appd		BEER FU 2013-05-02		A4	
sheet		revision		B		B		type	
index		sheet		1		2		Customer Drawing	

HF
Halogen Free

PB


PLUG PCB

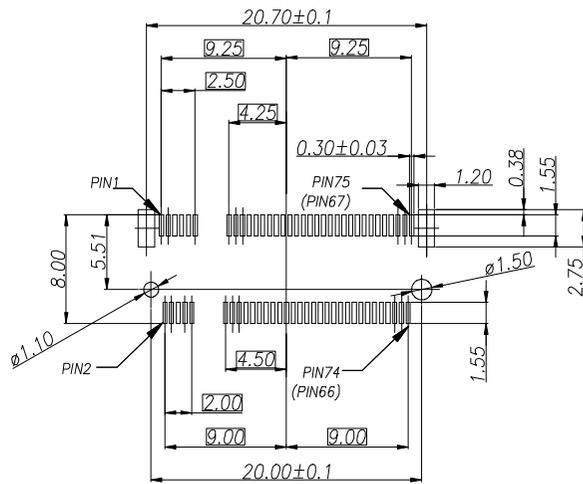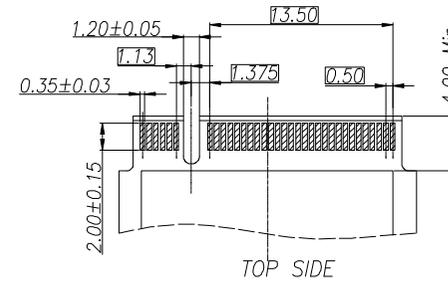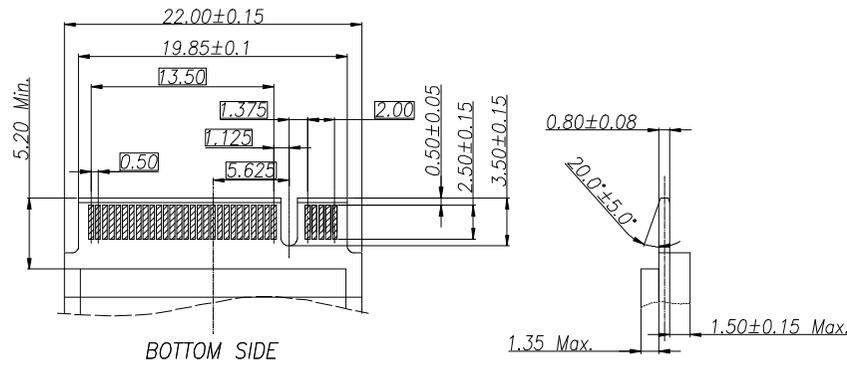

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE : ± 0.05 mm





	dwg no	sheet 2 of 3	size
	10128796		A4
	type Customer Drawing		

sheet index	revision sheet	B	B	B														
	1	2	3															

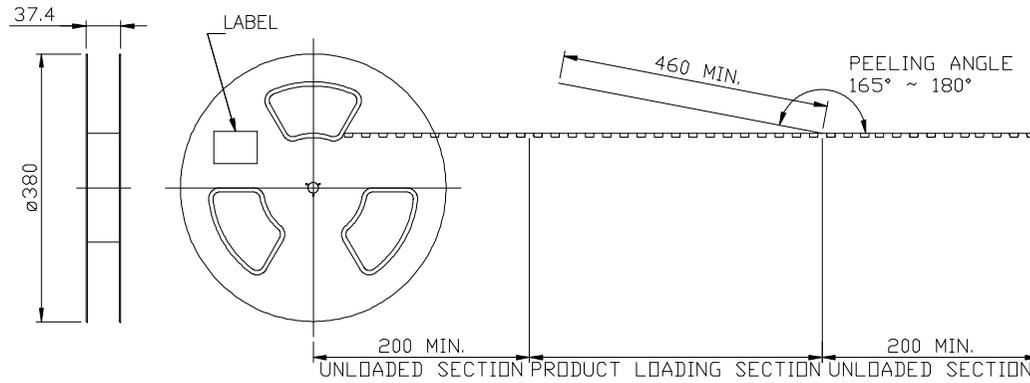

NOTES :

- MATERIAL :
 COVER TAPE : ANTISTATIC P.S T=0.05±0.01 ,COLOR:CLEAR
 CARRIER TAPE : ANTISTATIC P.S T=0.40±0.10,COLOR:BLACK
 REEL : PS UL94V-0
 CARTON: CORRUGATED FIBER
- DIMENSION :
 REEL : SEE DRAWING
 SHIPPING BOX: 385X385X225mm
- QUANTITY : SEE TABLE
- PEELING RESISTANCE : 10gf~130gf (for 12~56mm)
- PEELING SPEED : 300mm/MINUTES

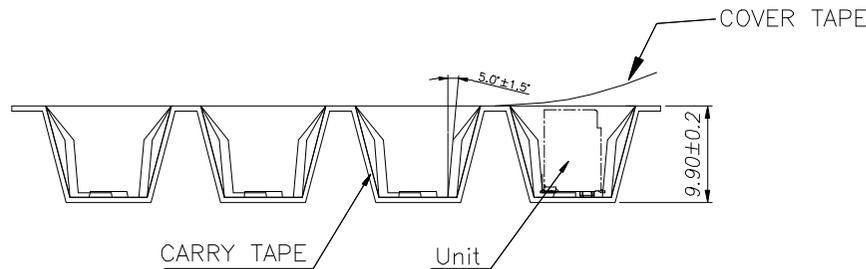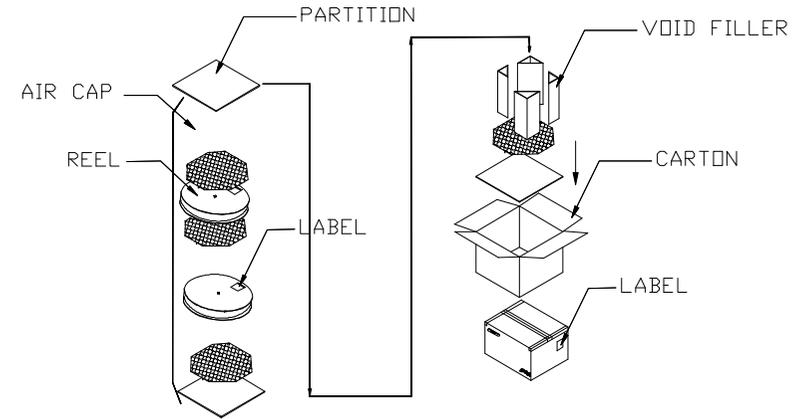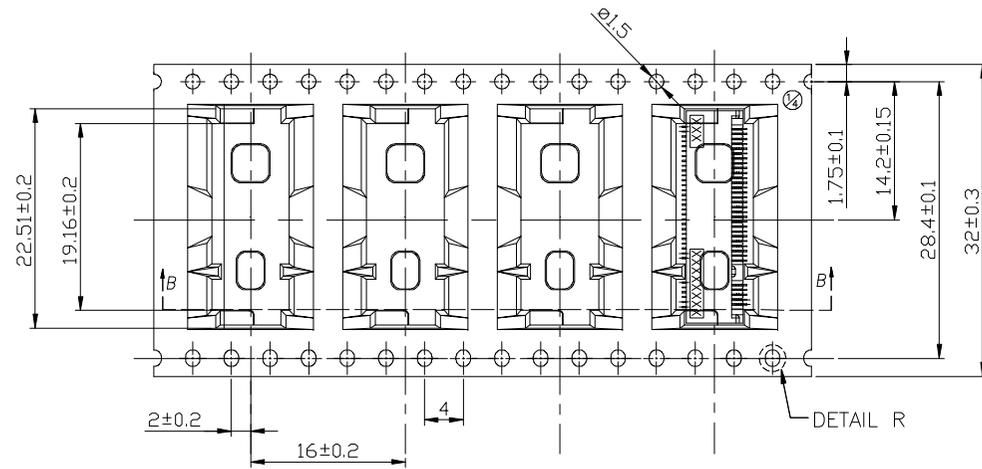

5.315KG	4.037KG	500	5	2500
GROSS WEIGHT	NET WEIGHT	PCS/ REEL	REEL/ CARTON	PCS/ CARTON



dwg no	sheet 3 of 3	size
10128796		A4
type	Customer Drawing	

sheet index	revision sheet	B 1	B 2	B 3															
-------------	----------------	-----	-----	-----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--