


## Base strip - MCV 0,5/10-G-2,5 - 1881639


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

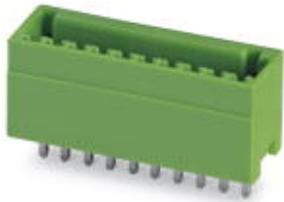

Header, nominal current: 4 A, rated voltage (III/2): 160 V, number of positions: 10, pitch: 2.5 mm, Color: green, Contact surface: Tin, mounting: Wave soldering

### Why buy this product

- Well-known mounting principle allows worldwide use
- Vertical connection enables multi-row arrangement on the PCB

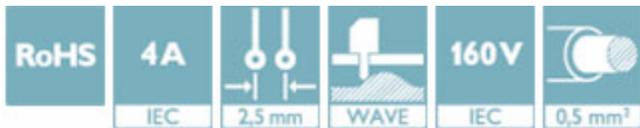

### Key Commercial Data

Packing unit	1 STK
Minimum order quantity	50 STK
GTIN	 4 017918 156879
GTIN	4017918156879
Weight per Piece (excluding packing)	2.190 g
Custom tariff number	85366930
Country of origin	Germany

### Technical data

#### Dimensions

Length	8.1 mm
Pitch	2.5 mm
Dimension a	22.50 mm
Width	27.20 mm
Constructional height	10.1 mm
Height	13.6 mm
Length of the solder pin	3.5 mm

## Base strip - MCV 0,5/10-G-2,5 - 1881639

### Technical data

#### Dimensions

Pin dimensions	0,8 x 0,8
Hole diameter	1.2 mm

#### General

Range of articles	MCV 0,5/...-G
Insulating material group	I
Rated surge voltage (III/3)	1.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	80 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal current I <sub>N</sub>	4 A
Maximum load current	4 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	green
Number of positions	10

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


### Drawings

# Base strip - MCV 0,5/10-G-2,5 - 1881639

Drilling diagram

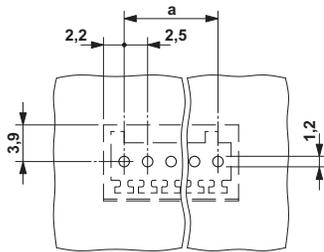


Diagram

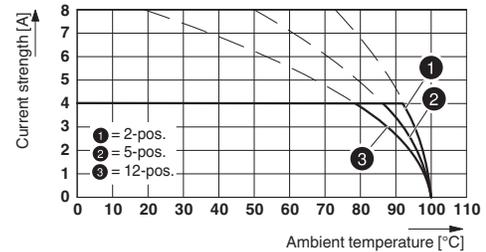

Type: FK-MC 0,5/...-ST-2,5 with MCV 0,5/...-G-2,5

Dimensional drawing

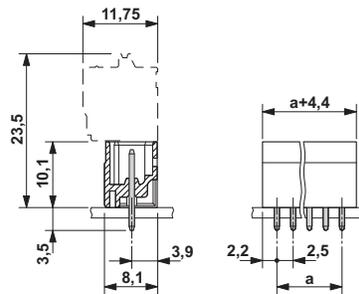

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637
ETIM 6.0	EC002637

### UNSPSC

UNSPSC 6.01	30211810
-------------	----------

# Base strip - MCV 0,5/10-G-2,5 - 1881639

## Classifications

### UNSPSC

UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

## Approvals

### Approvals

#### Approvals

UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCE CB Scheme / CCA / EAC / cULus Recognized

#### Ex Approvals

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
			B
Nominal current IN			4 A
Nominal voltage UN			125 V

VDE Gutachten mit Fertigungsüberwachung		<a href="http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx">http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx</a>	40013394
Nominal current IN			4 A
Nominal voltage UN			80 V

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
			B
Nominal current IN			4 A
Nominal voltage UN			125 V

# Base strip - MCV 0,5/10-G-2,5 - 1881639

## Approvals

IECEE CB Scheme		<a href="http://www.iecee.org/">http://www.iecee.org/</a>	DE1-56068-B1B2
Nominal current I <sub>N</sub>	4 A		
Nominal voltage U <sub>N</sub>	80 V		

CCA	CCA/ DE1 34250
Nominal current I <sub>N</sub>	4 A
Nominal voltage U <sub>N</sub>	80 V

EAC		B.01742
-----	--	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>
------------------	--	---

## Accessories

### Accessories

#### Coding element

Coding profile - CP-MC 0,5 - 1881435

Coding profile, is inserted into the groove in the header, red insulating material



### Labeled terminal marker

Marker card - SK 2,54/2,8:FORTL.ZAHLEN - 0804853



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, for terminal block width: 2.54 mm, Lettering field: 2.54 x 2.8 mm

## Base strip - MCV 0,5/10-G-2,5 - 1881639

### Accessories

---

#### Additional products

Printed-circuit board connector - FK-MC 0,5/10-ST-2,5 - 1881406



Plug component, nominal current: 4 A, rated voltage (III/2): 160 V, number of positions: 10, pitch: 2.5 mm, connection method: Push-in spring connection, Color: green, Contact surface: Tin

---