
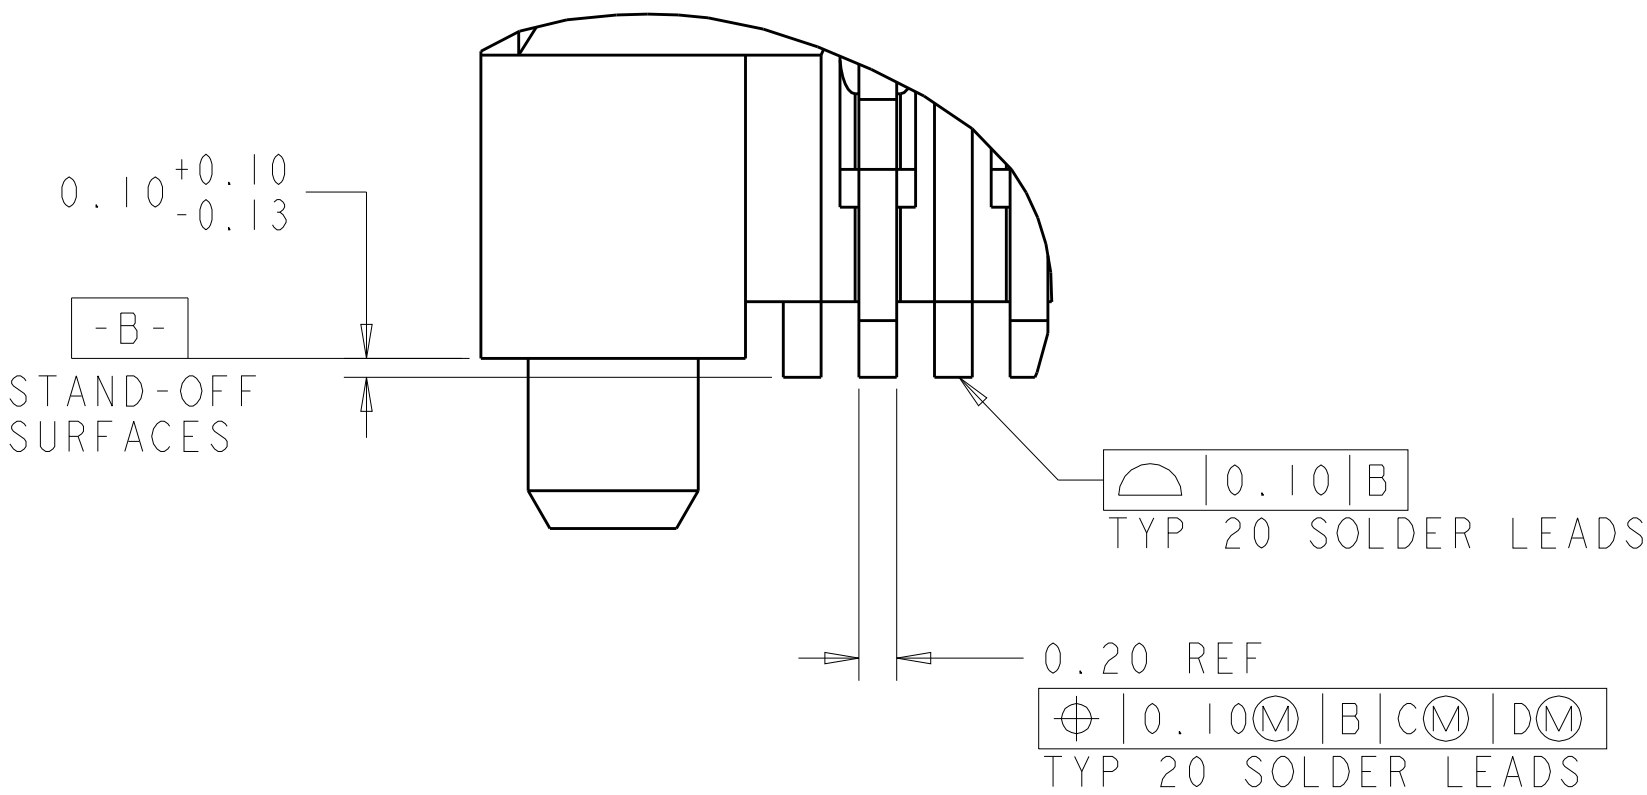
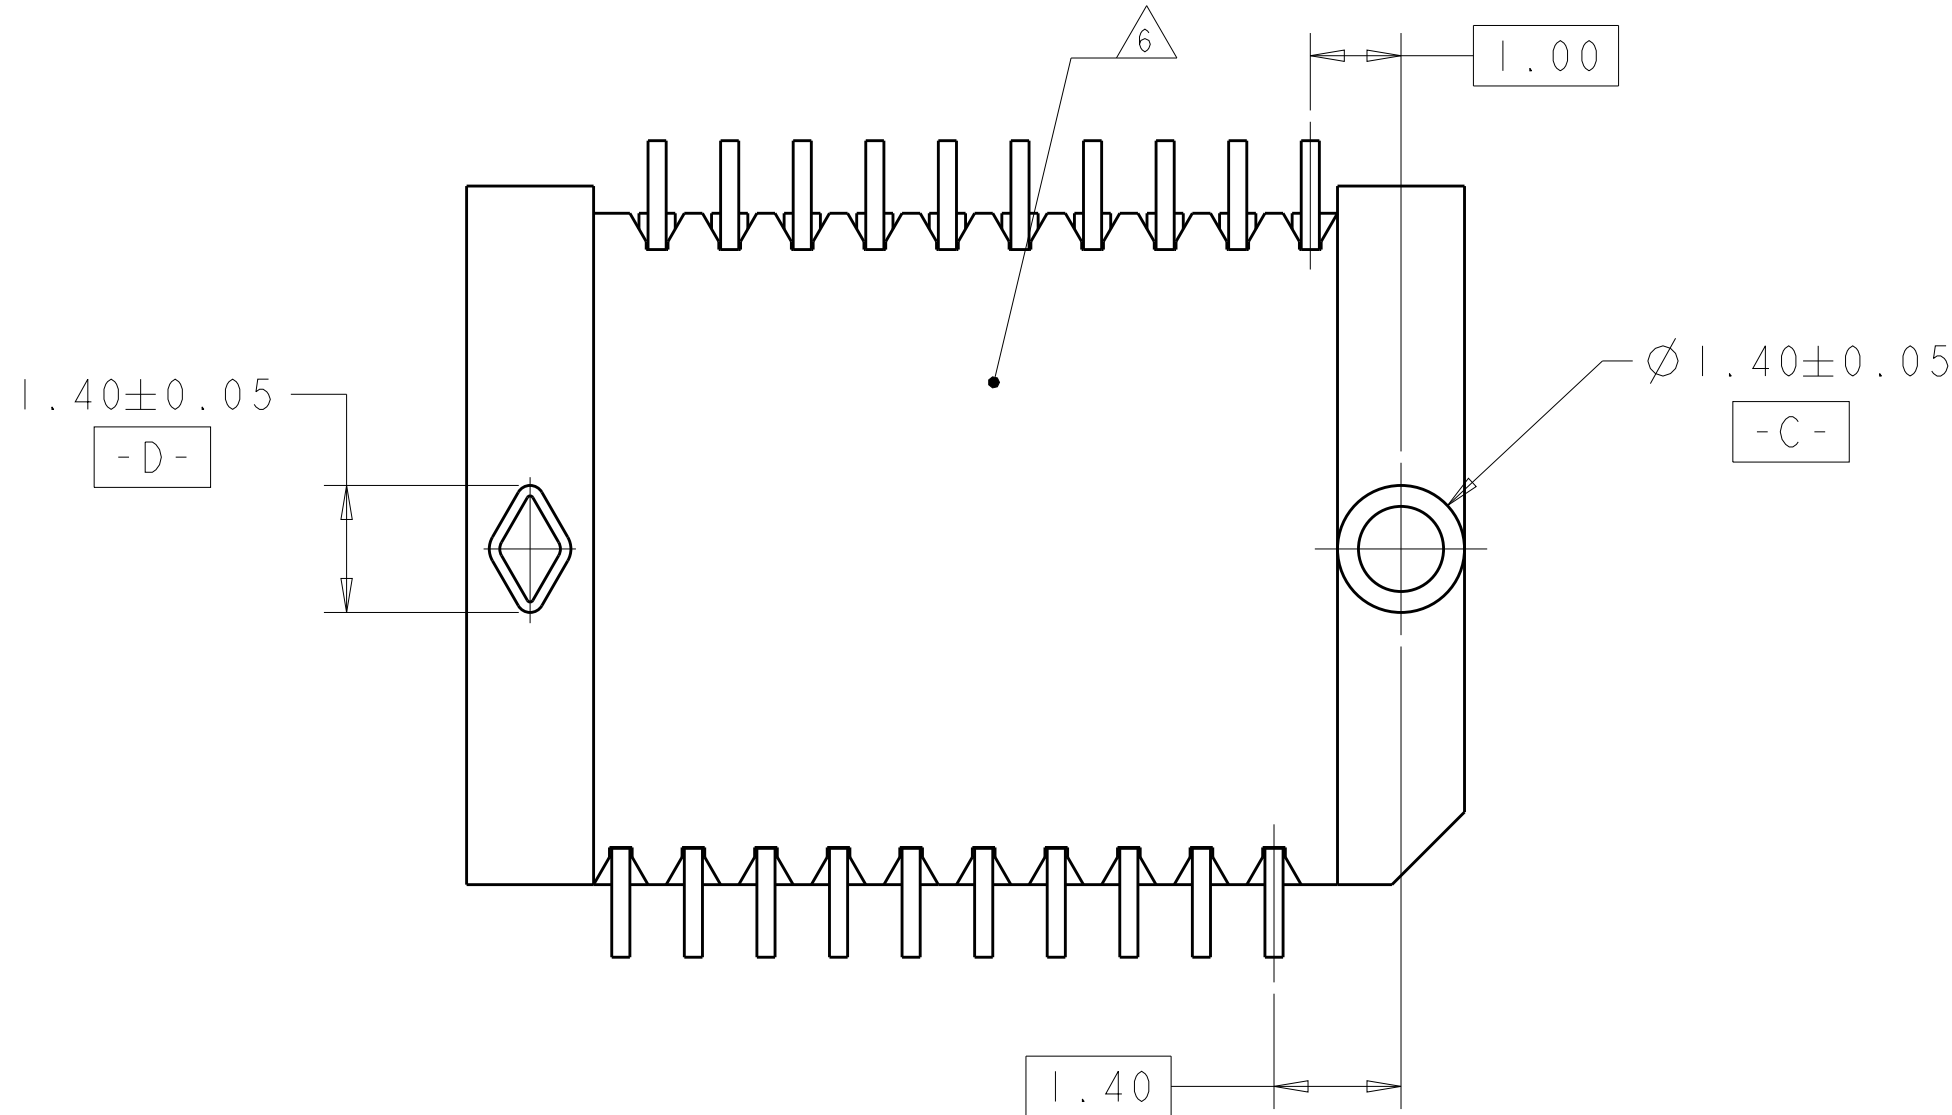
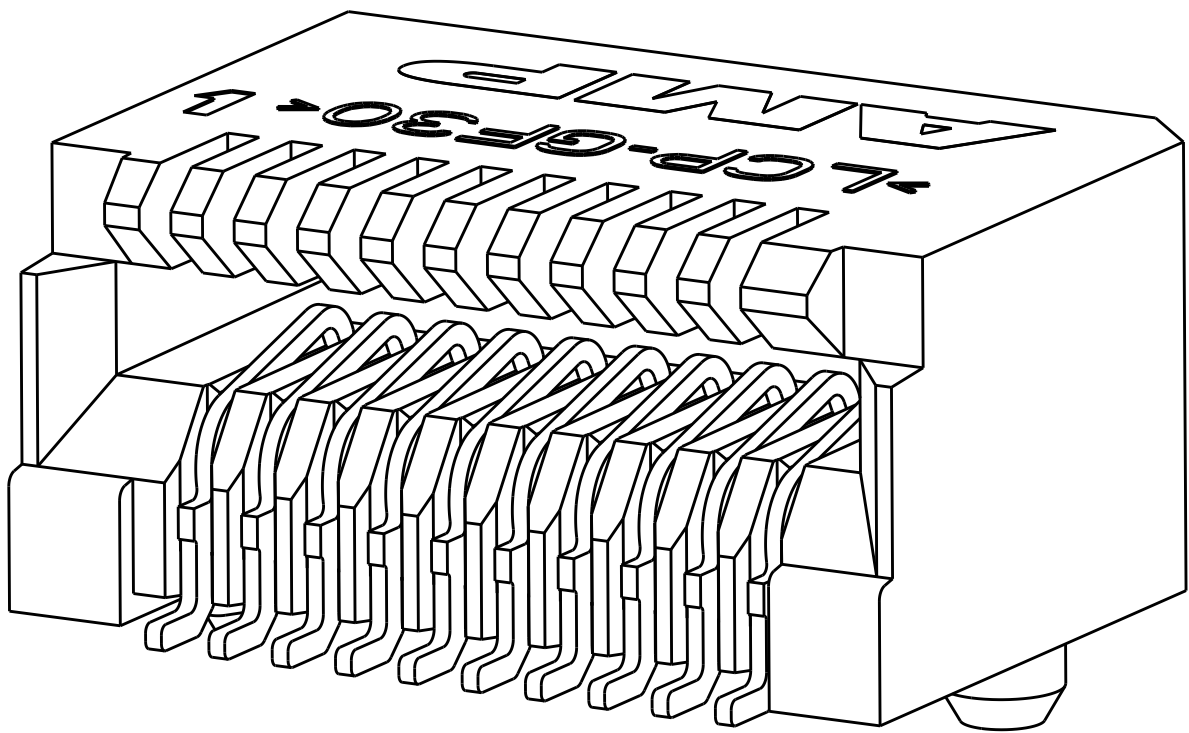
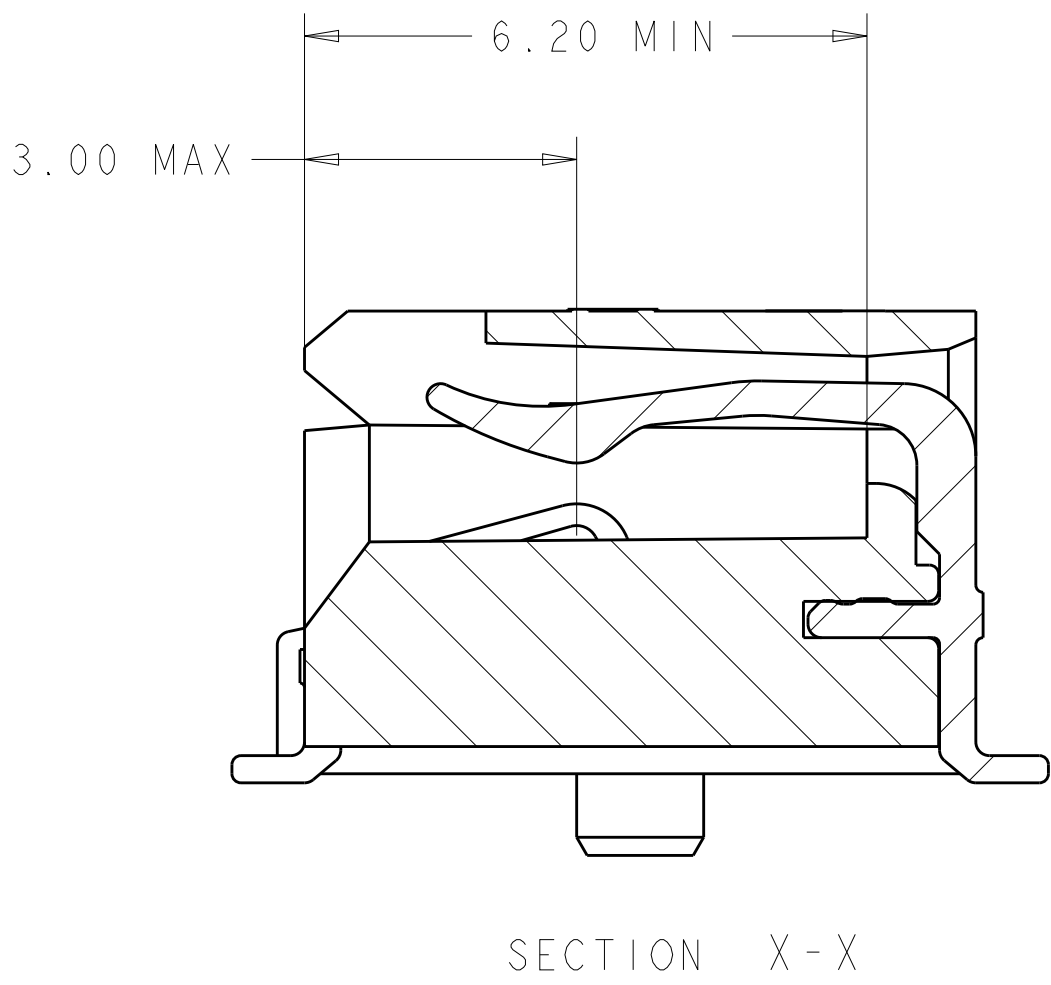
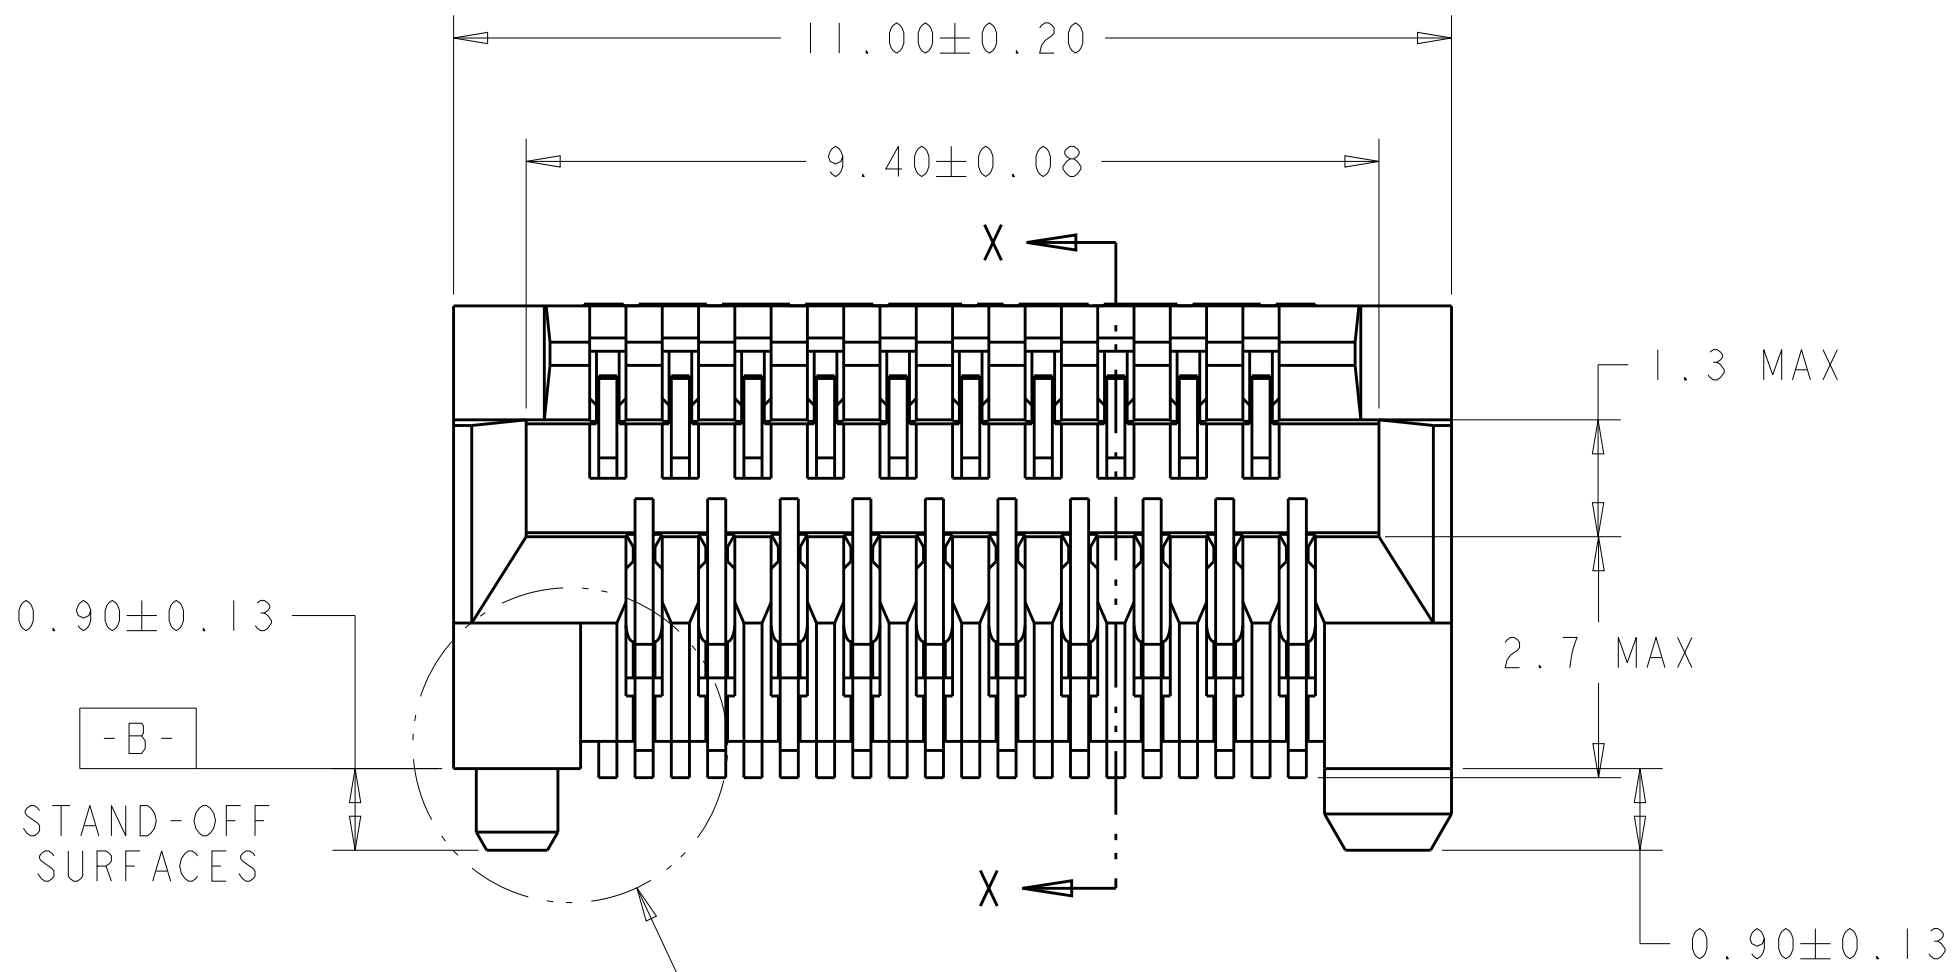
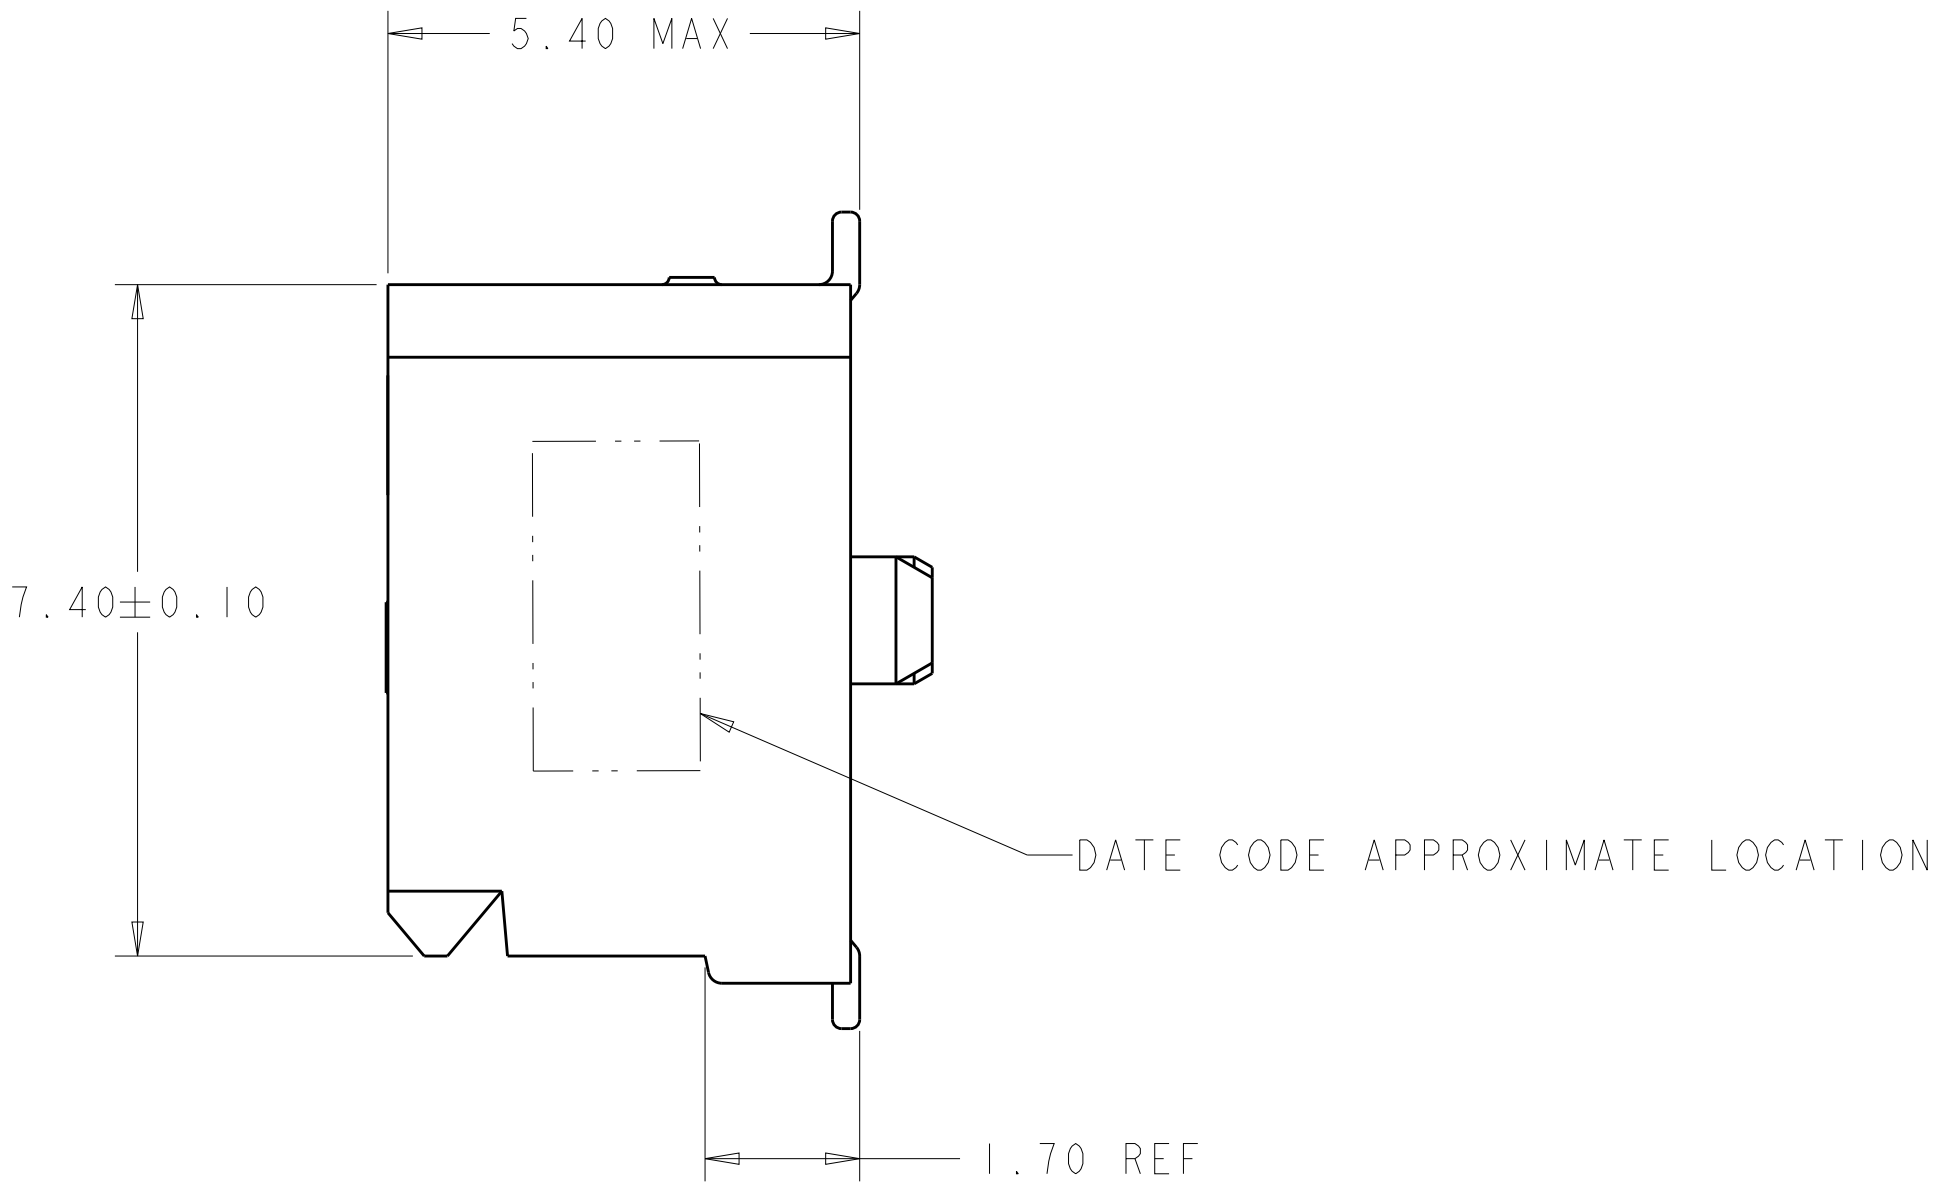



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00		K	REVISED PER ECO-12-015815	07NOV2012	TX	AC
			L	REVISED PER ECO-15-018066	16DEC2015	PP	SH

- ⚠ MATERIAL:
HOUSING: HIGH TEMPERATURE LCP, UL 94V-0 RATED, BLACK
CONTACTS: PHOSPHOR BRONZE.
- ⚠ 2 FINISH:
CONTACTS: 0.00076 MIN GOLD ON CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA. ALL OVER 0.0038 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT. LUBRICANT ON GOLD PLATE CONTACT AREAS.
3. PACKAGED 480 PIECES PER REEL.
- ⚠ 4 DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER, SEE DRAWING 1367034 FOR LAYOUT WHEN USED WITH 1367034-1 BOTTOM CAGE (STANDARD SFP APPLICATION).
- ⚠ 5 FINISH:
CONTACTS: 0.00038 MIN GOLD ON CONTACT AREA, 0.00013 MIN GOLD ON SOLDER AREA. ALL OVER 0.0038 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT. LUBRICANT ON GOLD PLATE CONTACT AREAS.
- ⚠ 6 PULL GROOVES PERMITTED ON THESE SURFACES AT MOLDING ENGINEERING DISCRETION
- ⚠ 7 FOR ESD PROTECTION TAPE AND REEL PACKAGE ONLY.
MATERIALS(COVER TAPE,EMBOSS TAPE,REEL,INNER LABEL ON REEL) USED WITH AN EPA AREA MUST PRIMARILY BE ELECTROSTATIC CONDUCTIVE OR ELECTROSTATIC DISSIPATIVE.
NO MATERIAL SHOULD BE CHARGED UP TO MORE THAN 100 VOLTS.

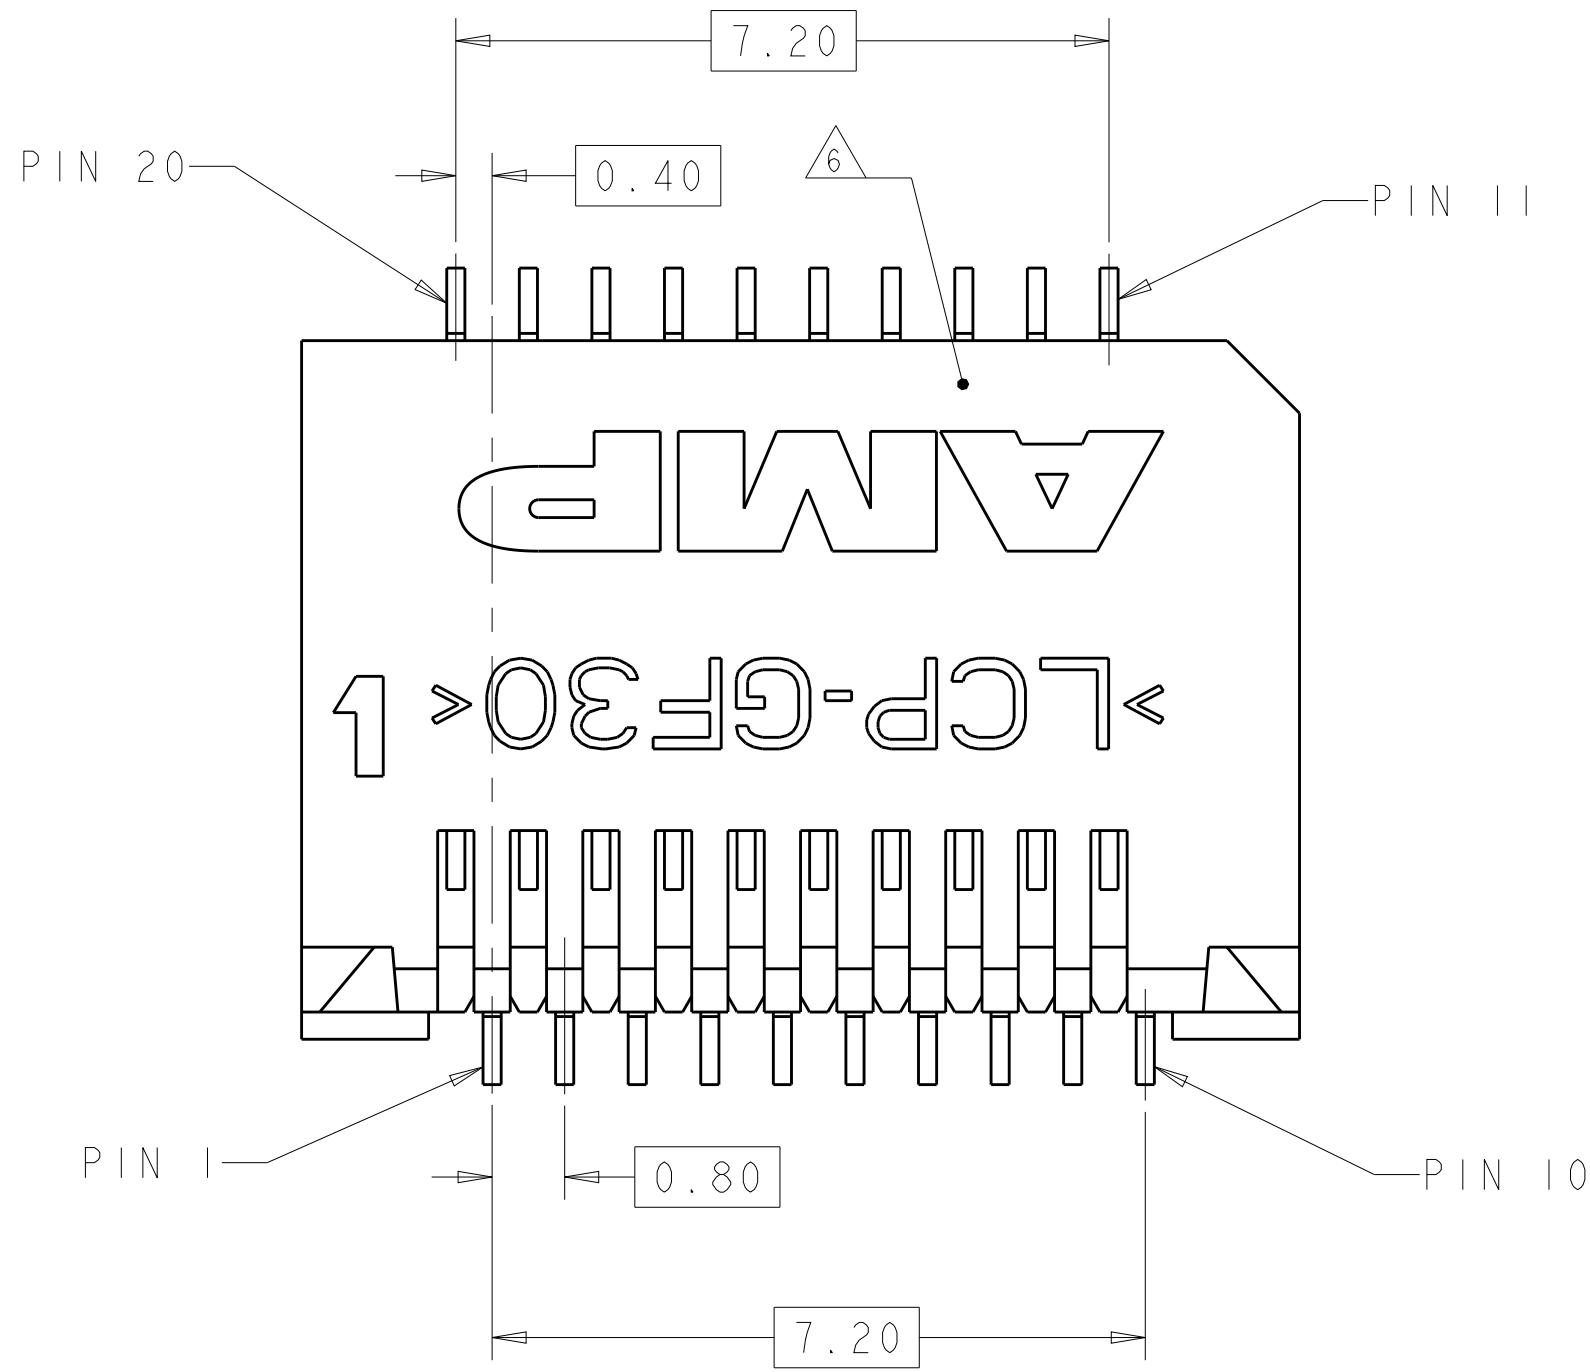

⚠ NO	⚠ 2	1888247-5
YES	⚠ 3	1888247-4
YES	⚠ 2	1888247-3
NO	⚠ 3	1888247-2
NO	⚠ 2	1888247-1
DATE CODE	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER 14FEB06	NAME PT CONNECTOR ASSEMBLY, 20 POS, RIGHT ANGLE, 0.8mm PITCH, SFP+	
DIMENSIONS:		CHK S. SHUEY 14FEB06		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S. SHUEY 14FEB06	SIZE CAGE CODE DRAWING NO	
0 PLC	±	PRODUCT SPEC	RESTRICTED TO	
1 PLC	±	108-1949	A100779C=1888247	
2 PLC	±0.10	APPLICATION SPEC	SCALE 8:1 SHEET 1 OF 3 REV L	
3 PLC	±	114-13017		
4 PLC	±	WEIGHT		
ANGLES	±	CUSTOMER DRAWING		
FINISH	-			

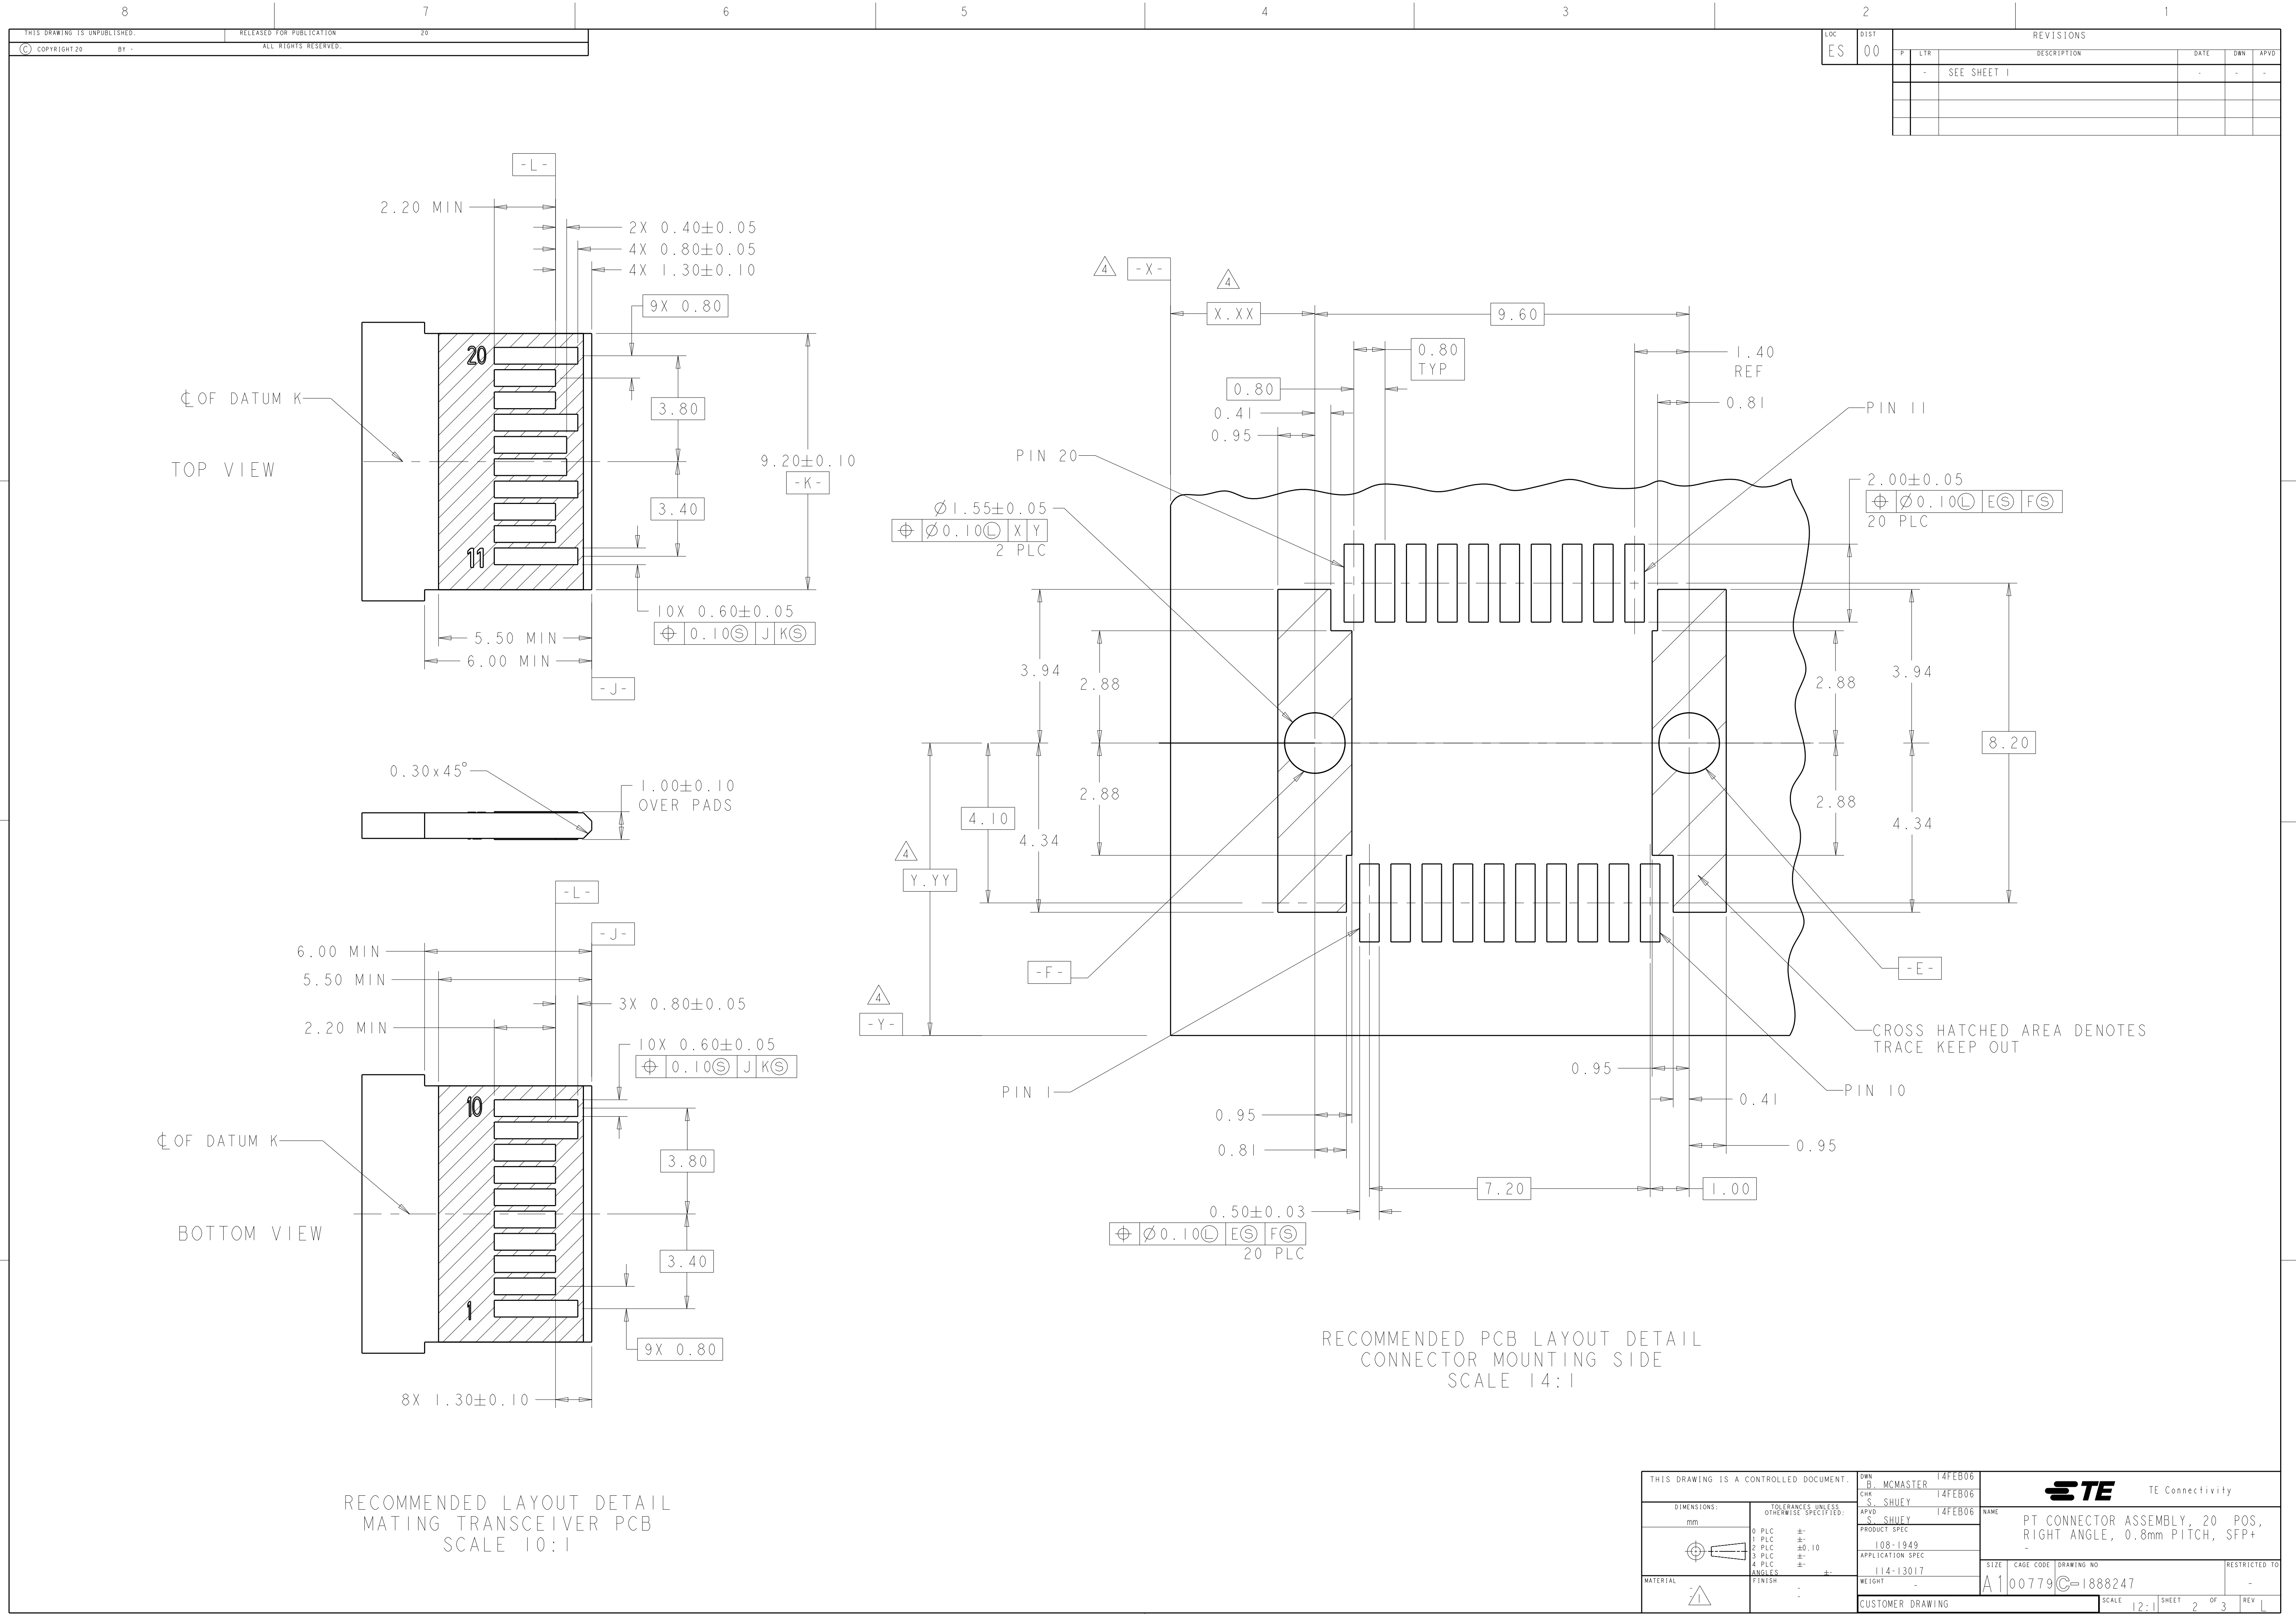

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN B. MCMASTER 14FEB06	 TE Connectivity
DIMENSIONS:		CHK S. SHUEY 14FEB06	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. SHUEY 14FEB06	
mm		NAME	
0 PLC ±		PRODUCT SPEC	PT CONNECTOR ASSEMBLY, 20 POS, RIGHT ANGLE, 0.8mm PITCH, SFP+ -
1 PLC ±0.10		108-1949	
2 PLC ±		APPLICATION SPEC	
3 PLC ±		114-13017	
4 PLC ±		WEIGHT	A100779C=1888247
ANGLES FINISH		CUSTOMER DRAWING	
MATERIAL		SCALE 12:1	SHEET 2 OF 3
		REV L	

4805 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1888247-2](#)