
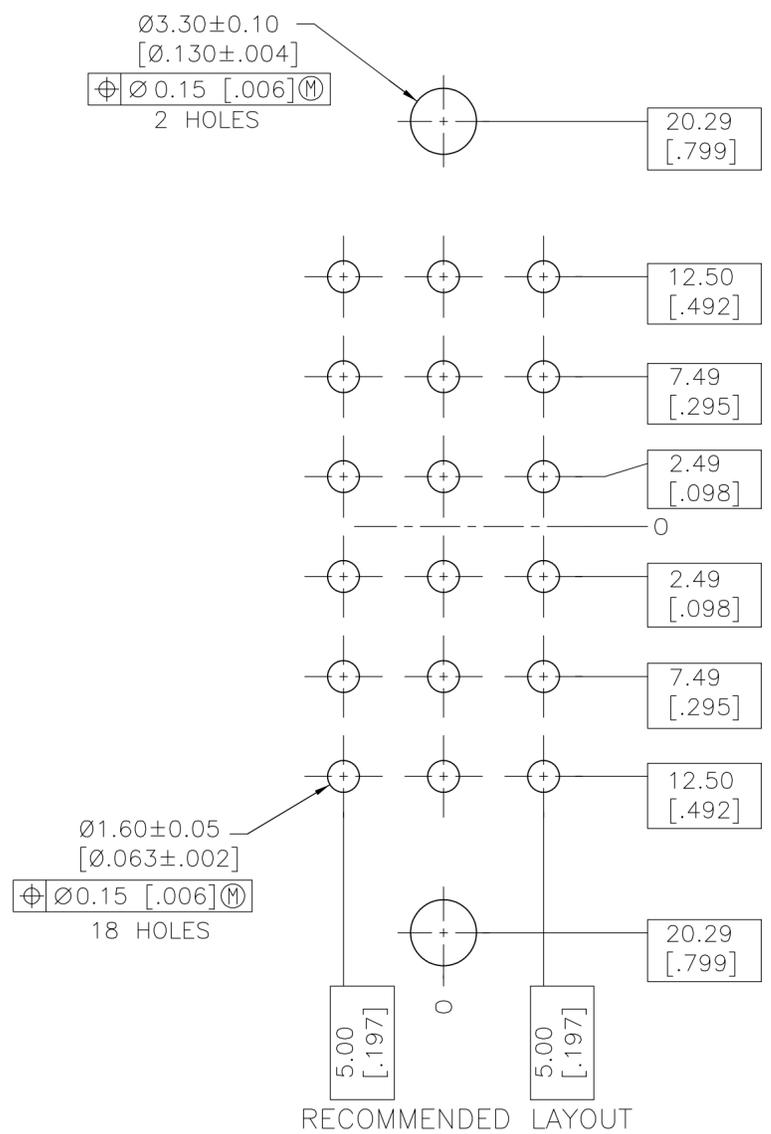
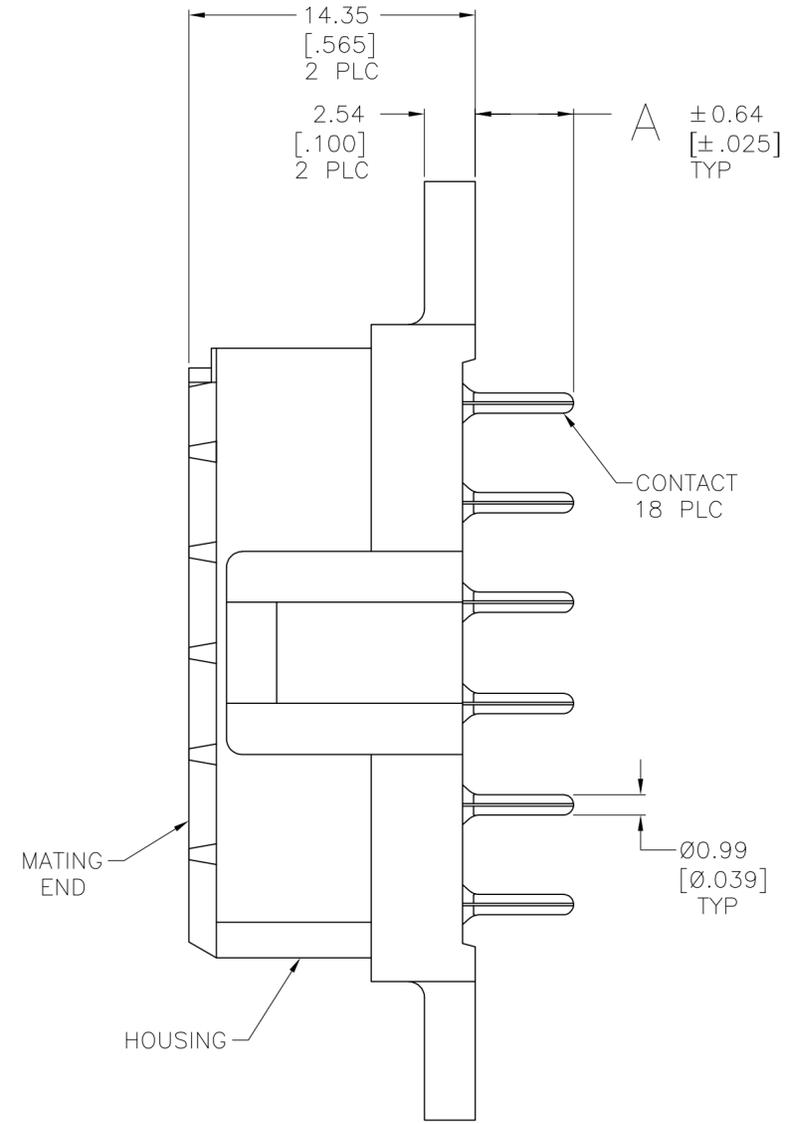


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
N		REVISED PER ECO-16-004940	06AUG2016	NK MZ

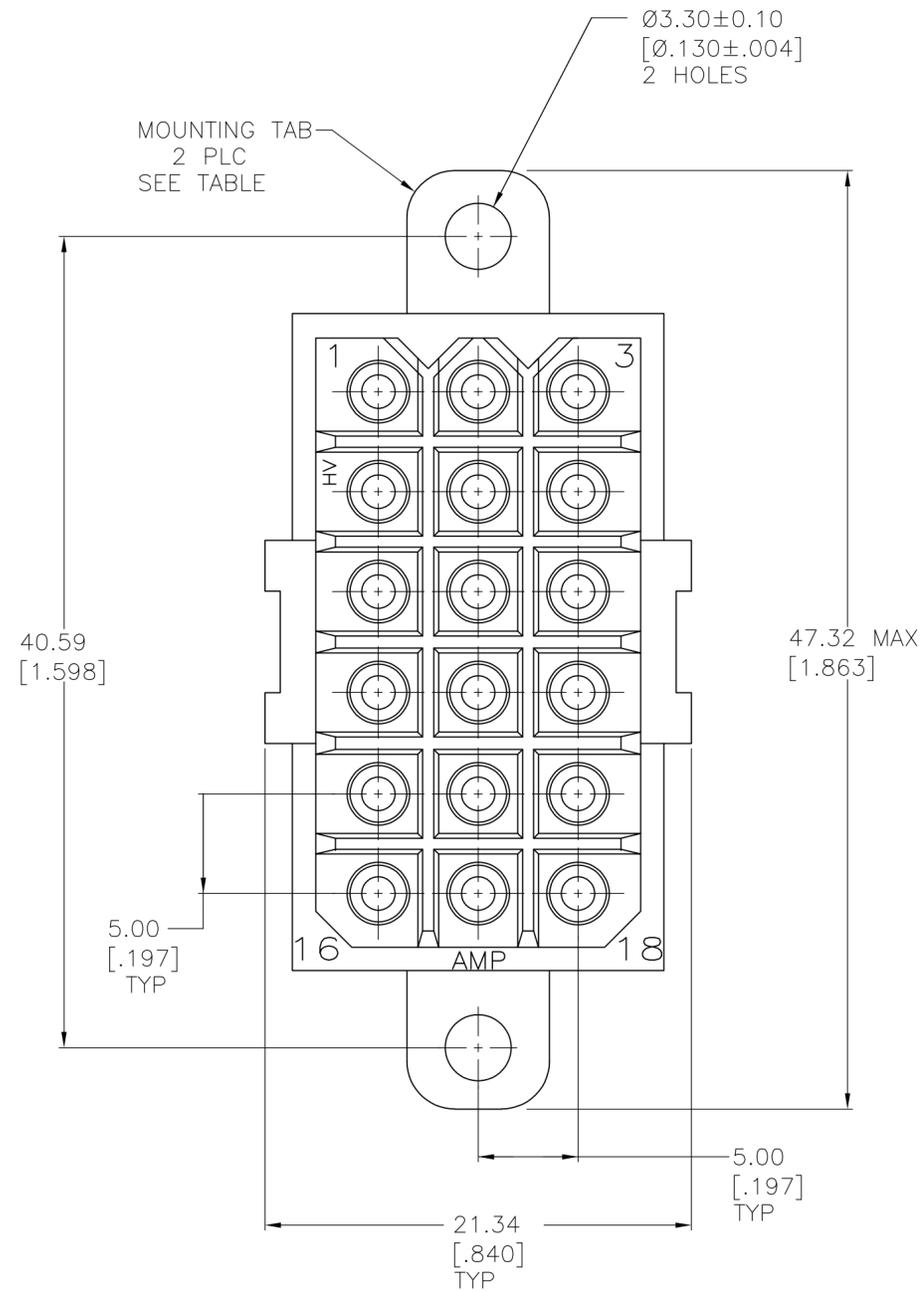

- 1 NYLON, UL 94-VO RATED, RED.
- 2 PHOSPHOR BRONZE.
- 3 3.81um [.000150] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.
- 4 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5 3.81um [.000150] MIN TIN OVER 1.27um [.000050] MIN NICKEL.
- 6 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 7 PRELIMINARY PART NUMBER.

DIM A	CONTACT FINISH	MOUNTING TABS	PART NO
7	3.50 [.137]	6	YES 1-207530-1
OBSOLETE	4.60 [.181]	6	NO -1-207530-0
		6	YES 207530-9
		5	NO 207530-8
		5	YES 207530-7
		4	NO 207530-4
		4	YES 207530-3
		3	NO 207530-2
		3	YES 207530-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	03/19/92		TE Connectivity
CHK	3-25-92		
APVD	3-25-92		
PRODUCT SPEC	108-10033		
MATERIAL	HOUSING: 1	CONTACT: SEE TABLE	WEIGHT
CUSTOMER DRAWING		SCALE	4:1

SOCKET HEADER ASSEMBLY, 18 POSITION, METRIMATE

SIZE: A2 CAGE CODE: 00779 C=207530 SHEET: 1 OF 1 REV: N

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207530-9](#)