
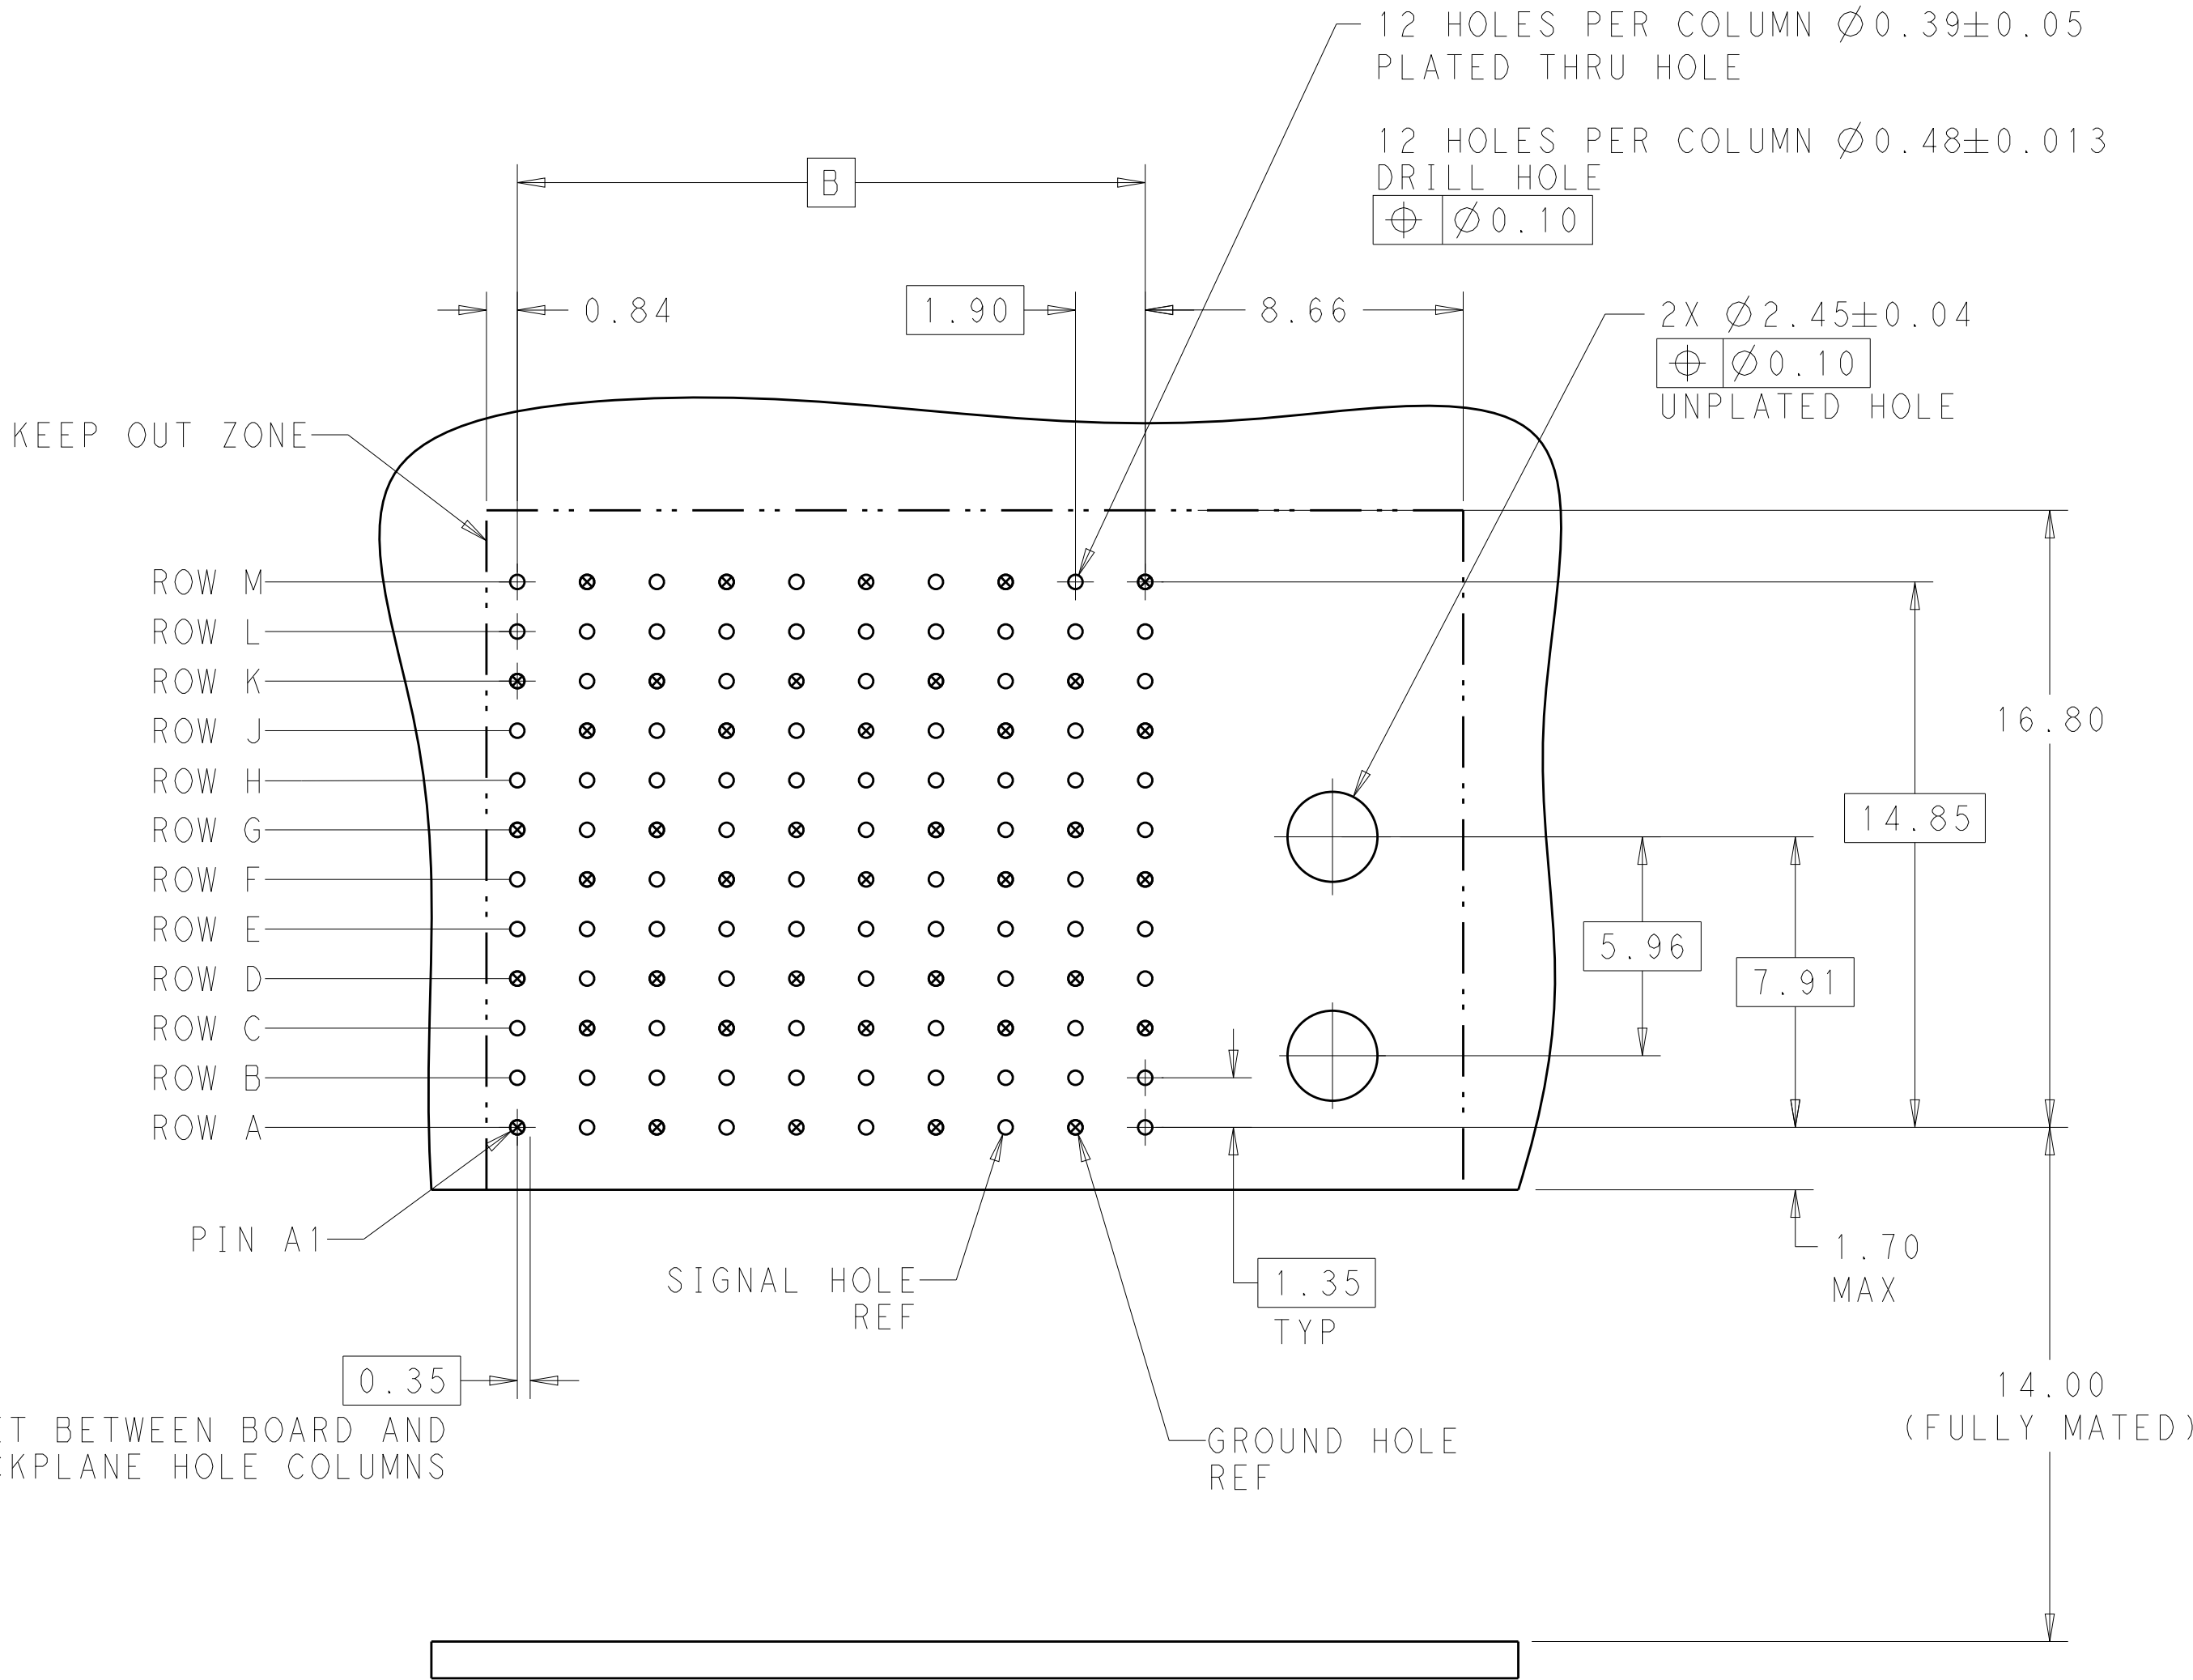
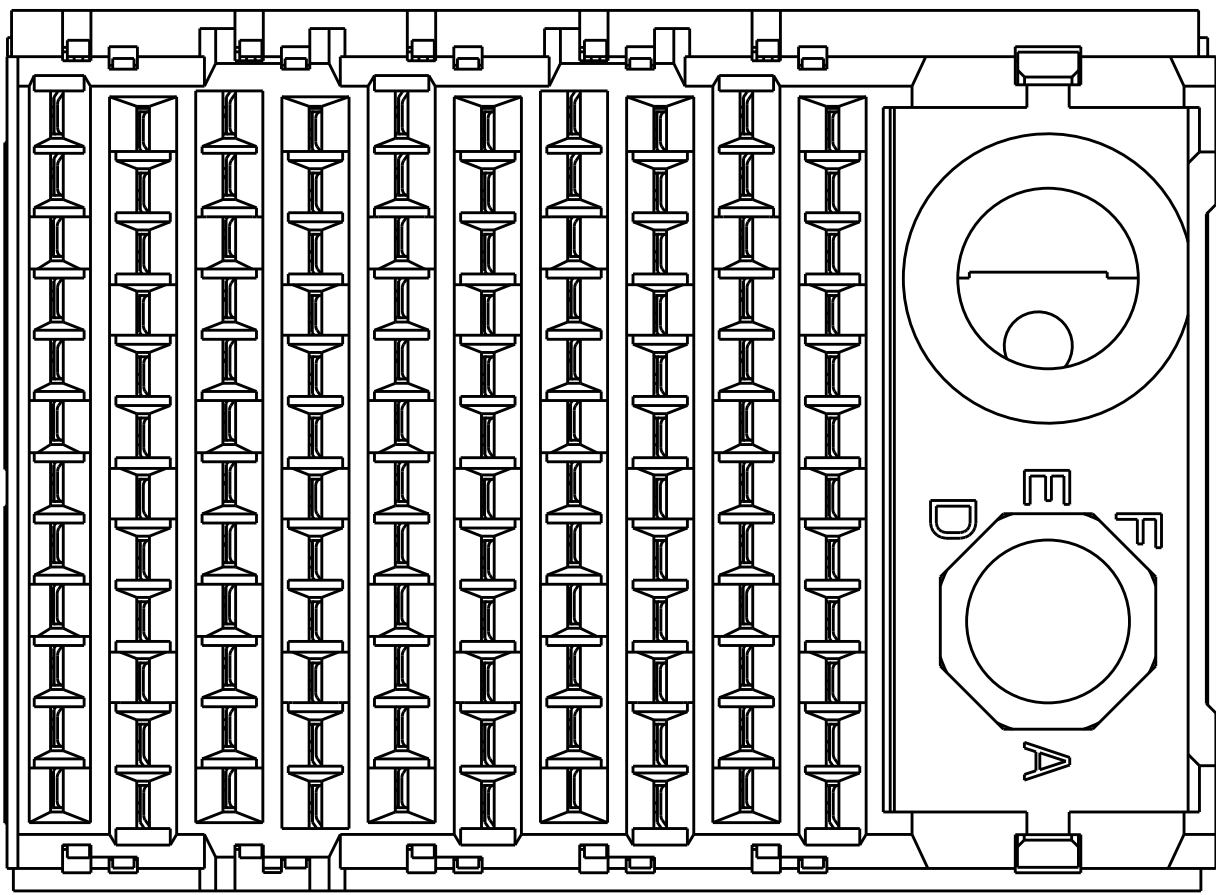
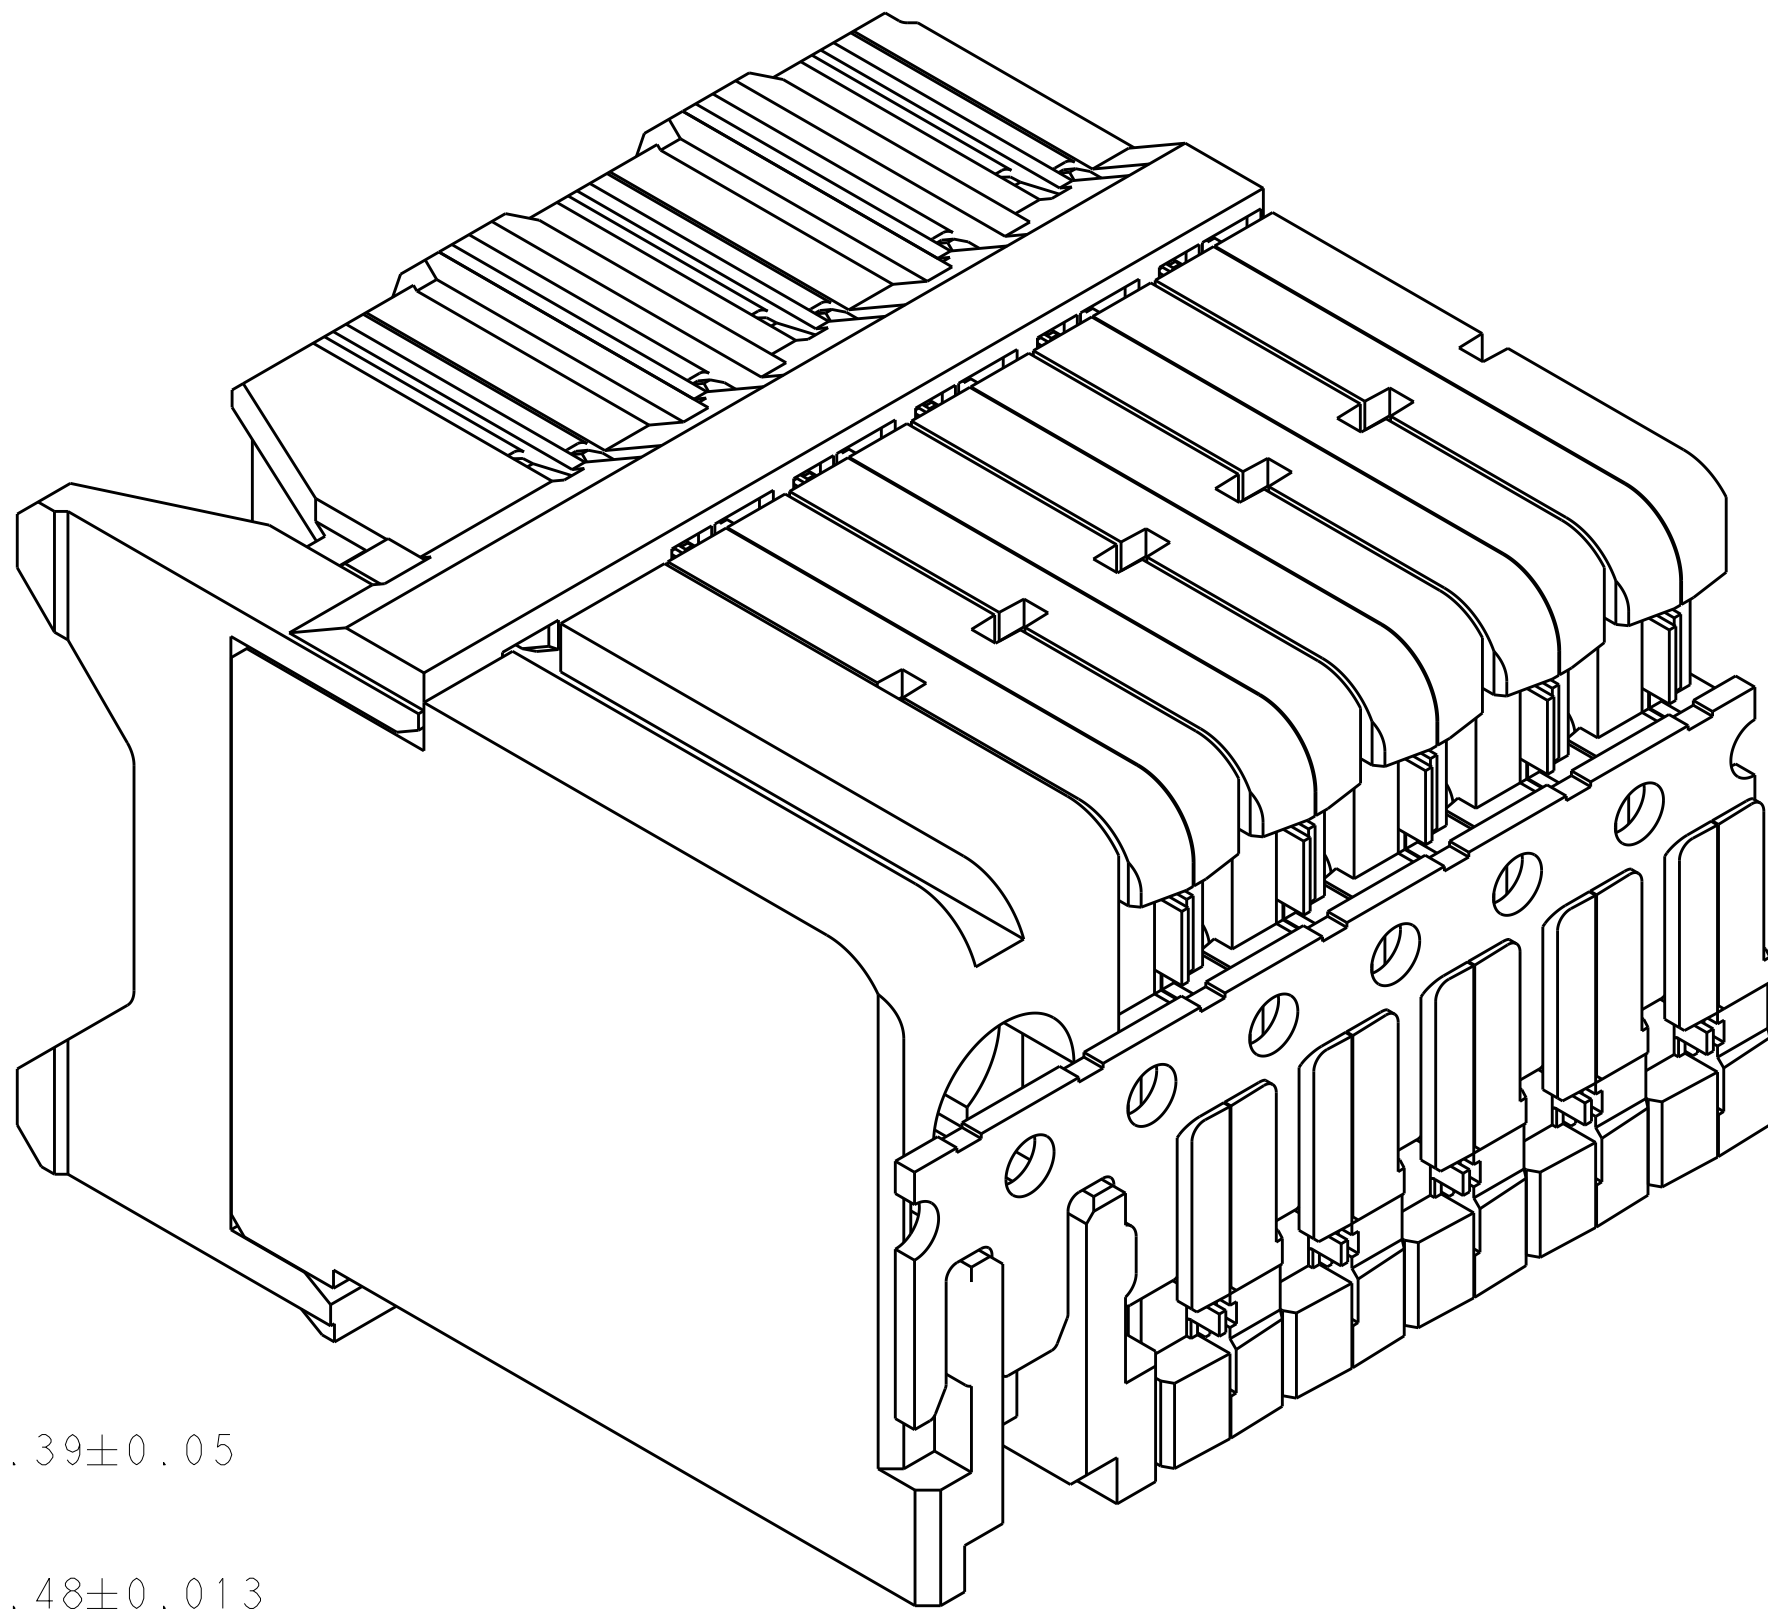
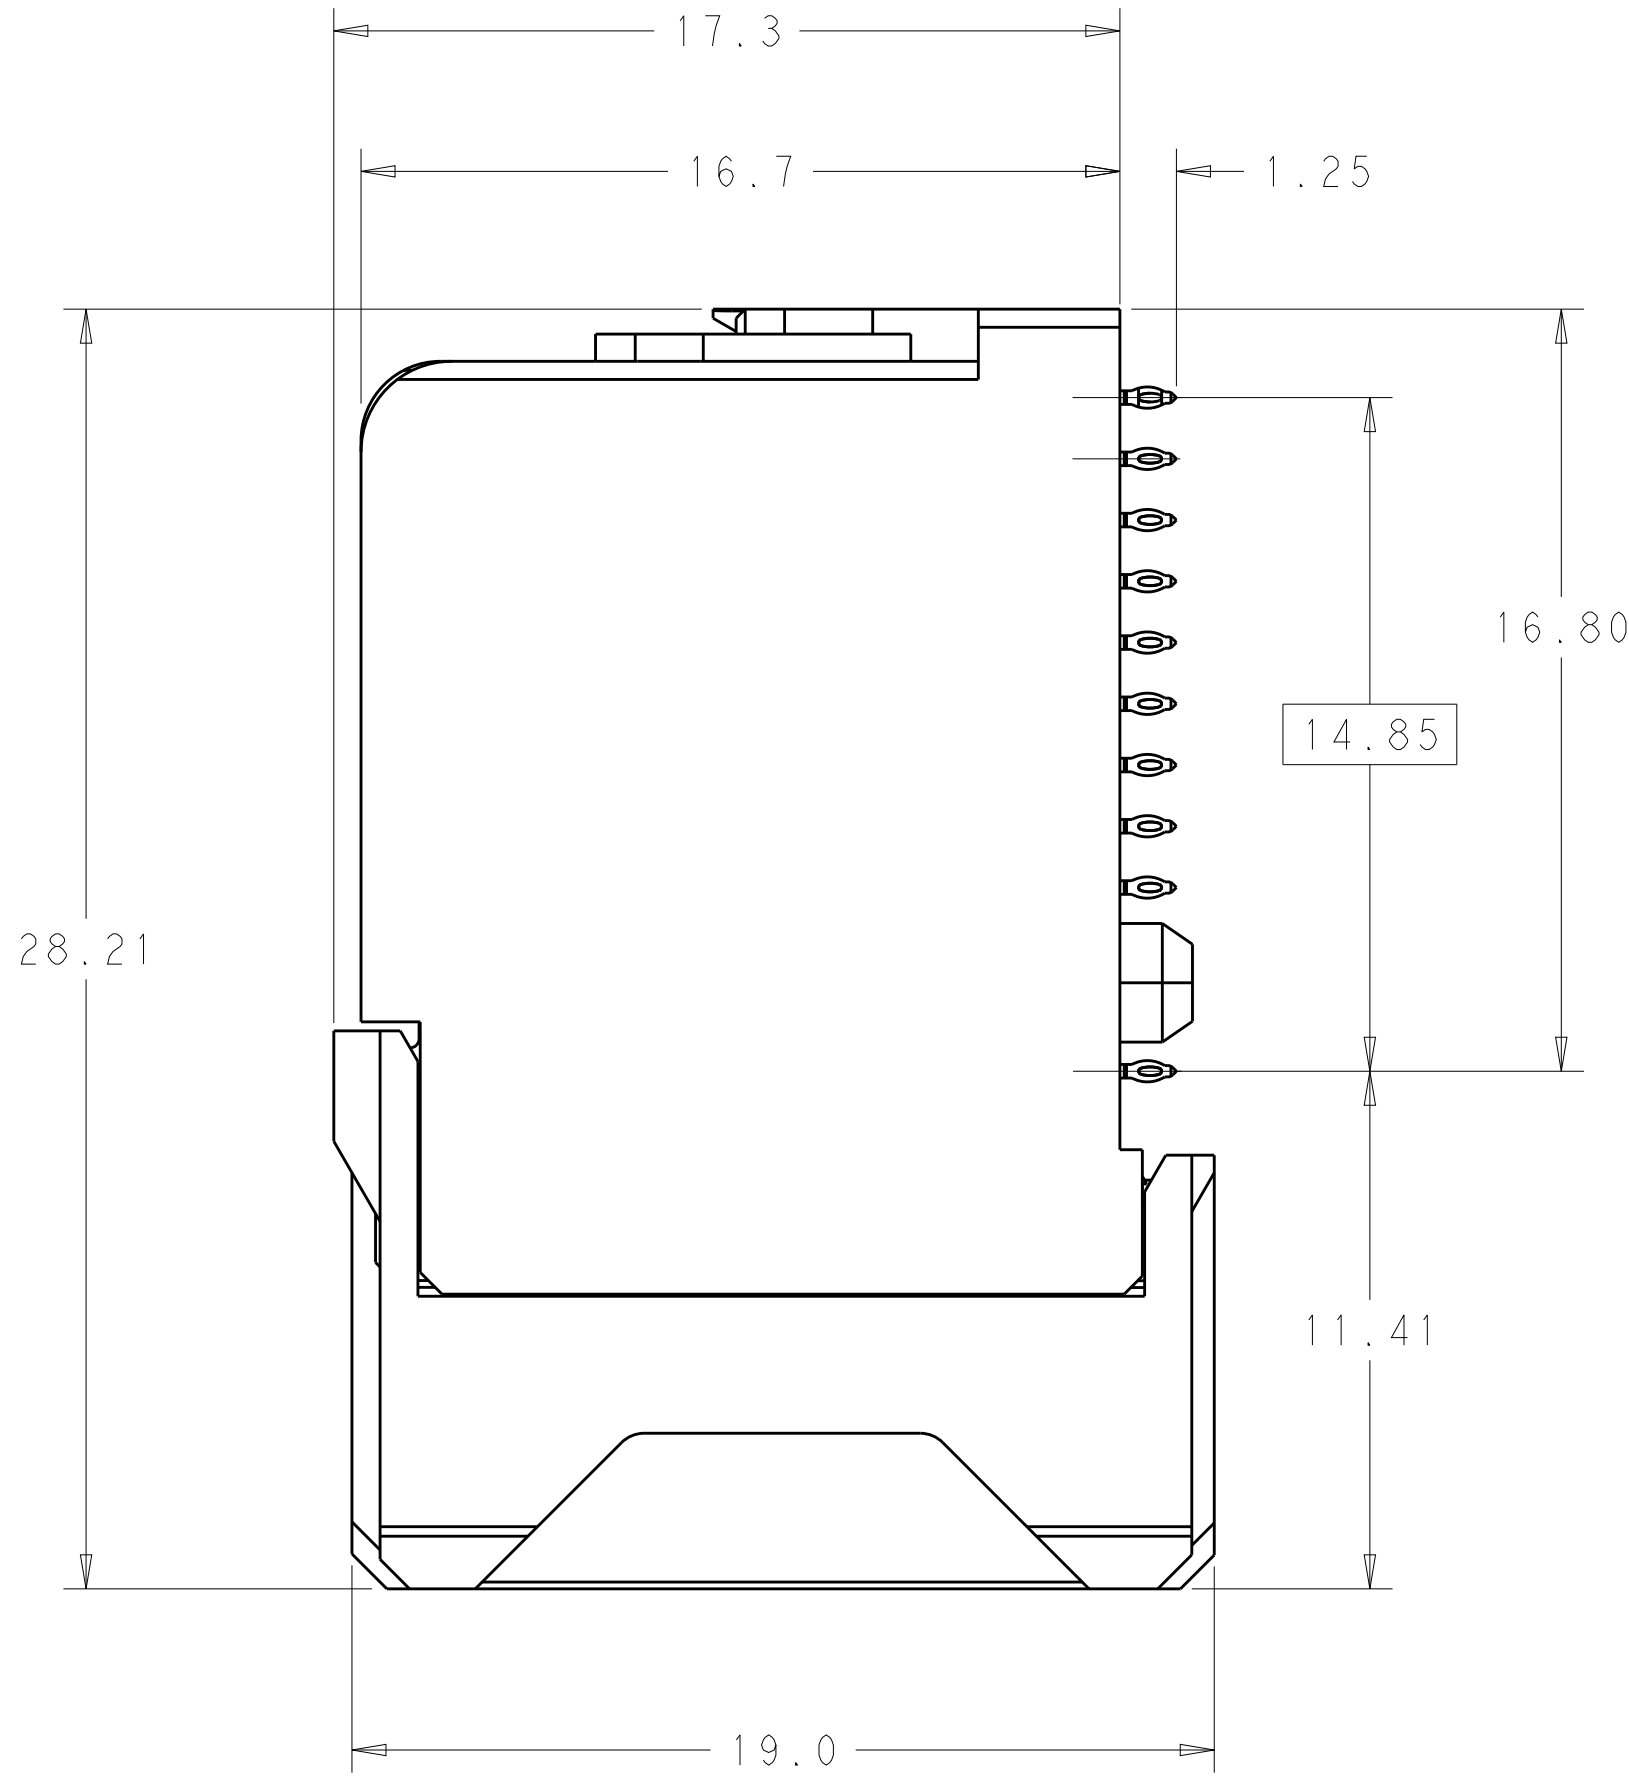


LOC		DIST		REVISIONS							
				DESCRIPTION			DATE	DWN	APVD		
				P	LTR						
					A	REVISED PER ECO-15-003242			24MAR2015	AP	DD

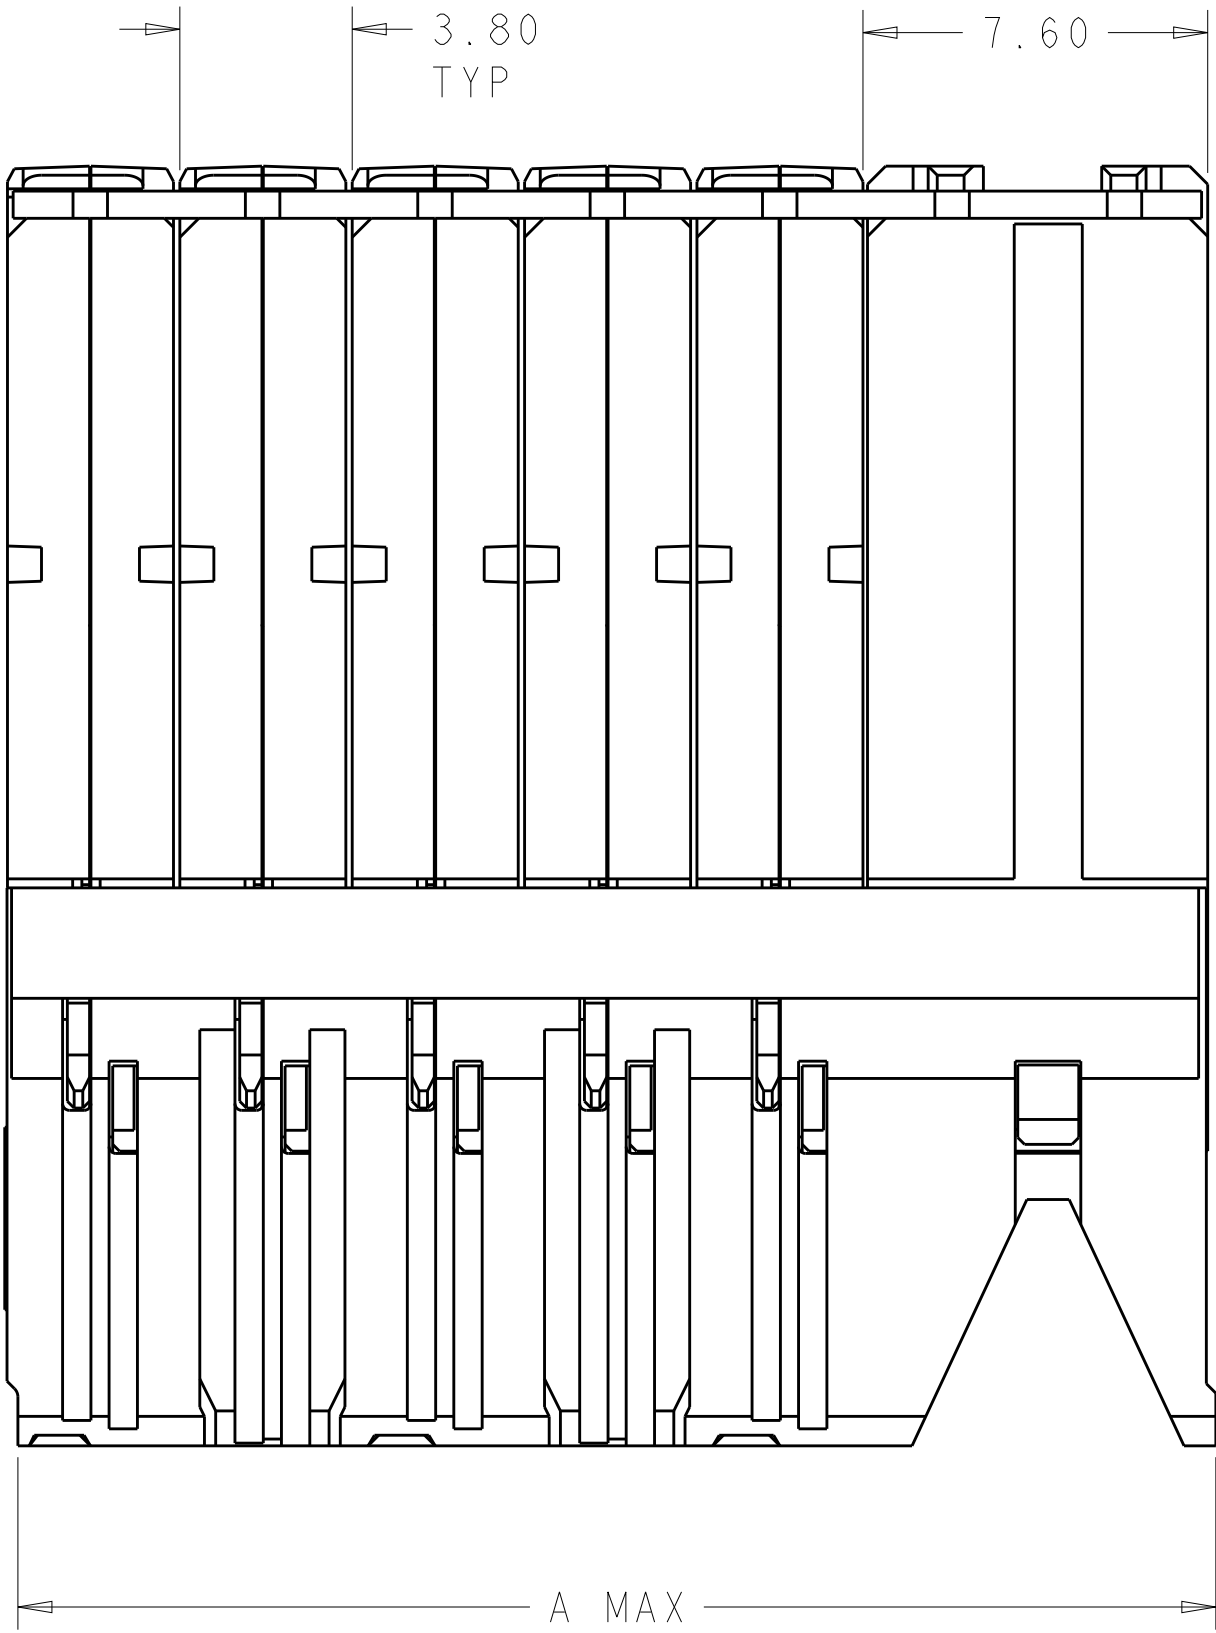

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0 RATED.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH: 30µm SELECTIVE GOLD IN CONTACT AREA, SELECTIVE TIN ON PCB TAILS, ALL OVER NICKEL.
- 3 CONNECTORS SUPPLIED WITH MOUNTING SCREWS.

36.10	45.60	20	2198787-8
32.30	41.80	18	2198787-7
28.50	38.00	16	2198787-6
24.70	34.20	14	2198787-5
20.90	30.40	12	2198787-4
17.10	26.60	10	2198787-3
13.30	24.80	8	2198787-2
9.50	21.00	6	2198787-1
B	A	COLUMN SIZE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.WELDON 02MAY2012	TE Connectivity	
		CHK D.DIXON 02MAY2012		
DIMENSIONS:		APVD D.DIXON 02MAY2012	NAME	
mm		PRODUCT SPEC	IMPACT, 4 PAIR, DAUGHTER CARD, RIGHT GUIDED, 85 OHM, SIGNAL MODULE	
		APPLICATION SPEC		
MATERIAL		WEIGHT	SIZE CAGE CODE DRAWING NO	
			A100779C=2198787	
		Customer Drawing	RESTRICTED TO	
			SCALE 6:1 SHEET 1 OF 1 REV A	

RECOMMENDED PCB LAYOUT
MIN BOARD THICKNESS 1.0