


UHF Connectors, Miniature (Continued)

Bulkhead Jacks, Crimp

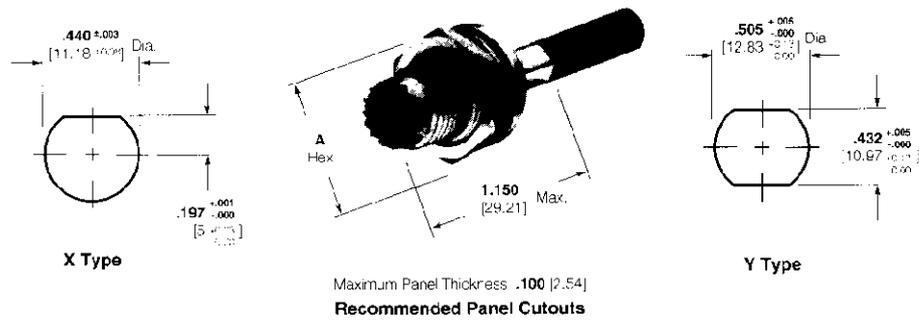


Connector Cable Range Selection Code†	RG/U Cable	Termination Type	Center Contact Plating	Body Plating	Dielectric	Flange Shape	Rubber Gasket	Part No.	Dim. L	Integral Die Hand Tool	Die Insert for Tools: Hand Tool-69710-1 Pneu.-69365, 69365-3	Recommended Panel Cutout Type
E	174, 316, 88, 188A	Dual Crimp	Tin	Nickel	Polypropylene	Hex	No	228665-2	.700 17.78	58124-1**	58159-1	Y
		Dual Crimp	Tin	Nickel	Polypropylene	Round	Yes	228903-2	.610 15.49	59583-1 58124-1**	58159-1	X
		Dual Crimp	Tin	Nickel	Polypropylene	Round	No	228903-4	.610 15.49	59583-1 58124-1**	58159-1	X
D	58, 58A, 58B, 58C	Dual Crimp	Tin	Nickel	Polypropylene	Round	No	228903-3	.610 15.49	220149-1 58124-1**	58158-1	X
		Dual Crimp	Tin	Nickel	Polypropylene	Round	No	1-228903-3	.610 15.49	220149-1 58124-1**	58158-1	X

†Refer to pages 14 and 15 for code specifications.

**Economy hand tool—does not have CERTI-CRIMP ratchet feature.


Notes: 1. P/N 1-228903-3 uses Contact P/N 226610-2 which is a loose piece screw machine version. All other components are called out on the drawing.
2. P/N 228903-3 uses Contact P/N 226853-2, which is a strip contact 10,000 pieces per reel also Bulkhead Jack Assembly 414046-1.

Snap-Lock Plug

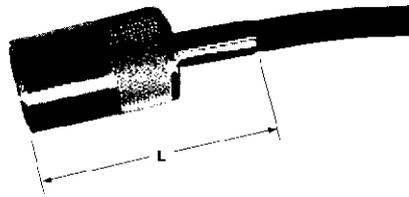

Connector Cable Range Selection Code	RG/U Cable	Termination Type	Center Contact Plating	Body Plating	Dielectric	Part No.	Dim. L
D	58	Dual Crimp	Tin	Nickel	TPX	415011-1	1.35 34.29
B	174	Dual Crimp	Tin	Nickel	TPX	415011-2	1.35 34.29

Snap-Lock Jack Bulkhead



Connector Cable Range Selection Code	RG/U Cable	Termination Type	Center Contact Plating	Body Plating	Dielectric	Part No.	Dim. L
D	58	Dual Crimp	Tin	Nickel	TPX	415012-1	1.23 31.24
B	174	Dual Crimp	Tin	Nickel	TPX	415012-2	1.23 31.24

Recommended Panel Cutout

Miniature and Standard UHF Connectors