


CORE DIMENSIONS:

A	14.99 [.590]	+	0.50 [.020]
B	6.76 [.266]	+	0.30 [.012]
C	28.83 [1.135]	+	0.60 [.024]
D	7.49 [.295]	+	0.35 [.014]


UNCONTROLLED DOCUMENT

IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	95 Ω	270 Ω	460 Ω
Minimum	- Ω	216 Ω	- Ω

Z vs. FREQUENCY (REF. ONLY)

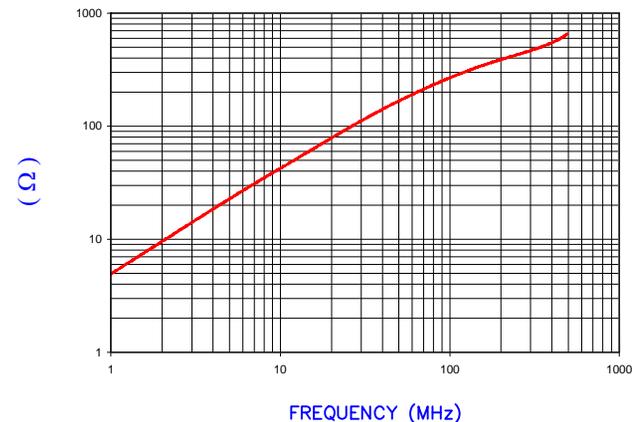

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture

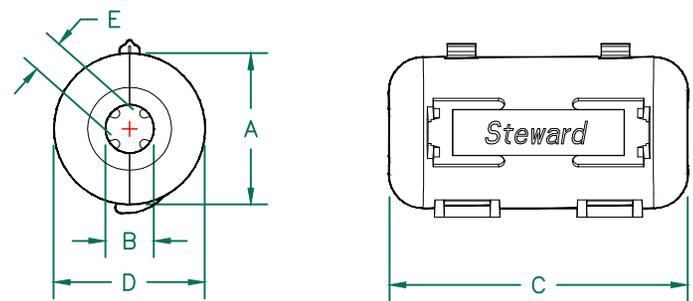

NOTES:

1. ASSEMBLED PART #: 28A2026-0A2
2. CASE COLOR: BLACK - "0A2"
3. CASE FLAMMABILITY RATING: UL94 V-2.
4. CASE MATERIAL: Halogen Free Nylon
5. COSMETIC SPECIFICATION REFER TO WI-QA-038.

CASE DIMENSIONS:

A	21.00 [.827]	+	Ref.
B	6.80 [.268]	+	Ref.
C	41.70 [1.642]	+	Ref.
D	21.00 [.827]	+	Ref.
E	4.85 [.191]	+	Ref.

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
J	UPDATE CORE TOL	12/23/15	Jcai				
H	UPDATE COMPANY LOGO ,ADD NOTE 5	08/23/14	QIU				
G	UPDATED NOTE 3	09/15/10	JUN				
F	UPDATE COMPANY LOGO ADD NOTE 3&4	01/27/09	JRK				
E	UPDATE 100MHz MINIMUM VALUE	11/01/07	TMB				
D	UPDATE COMPANY LOGO	04/18/07	TMB	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
C	CHANGE CASE DIMENSION TOLERANCES REVISE NOTE 1	03/05/07	TMB	28A2026-0A2	J	CASE ASSEMBLY	JRK
REV	DESCRIPTION	DATE	INT	DATE:	SCALE:	NTS	MATERIAL:
				06/29/04			FERRITE
				CAD #	TOOL #	-	
				28A2026-0A2-J			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Technologies:](#)

[28A2026-0A2](#)