
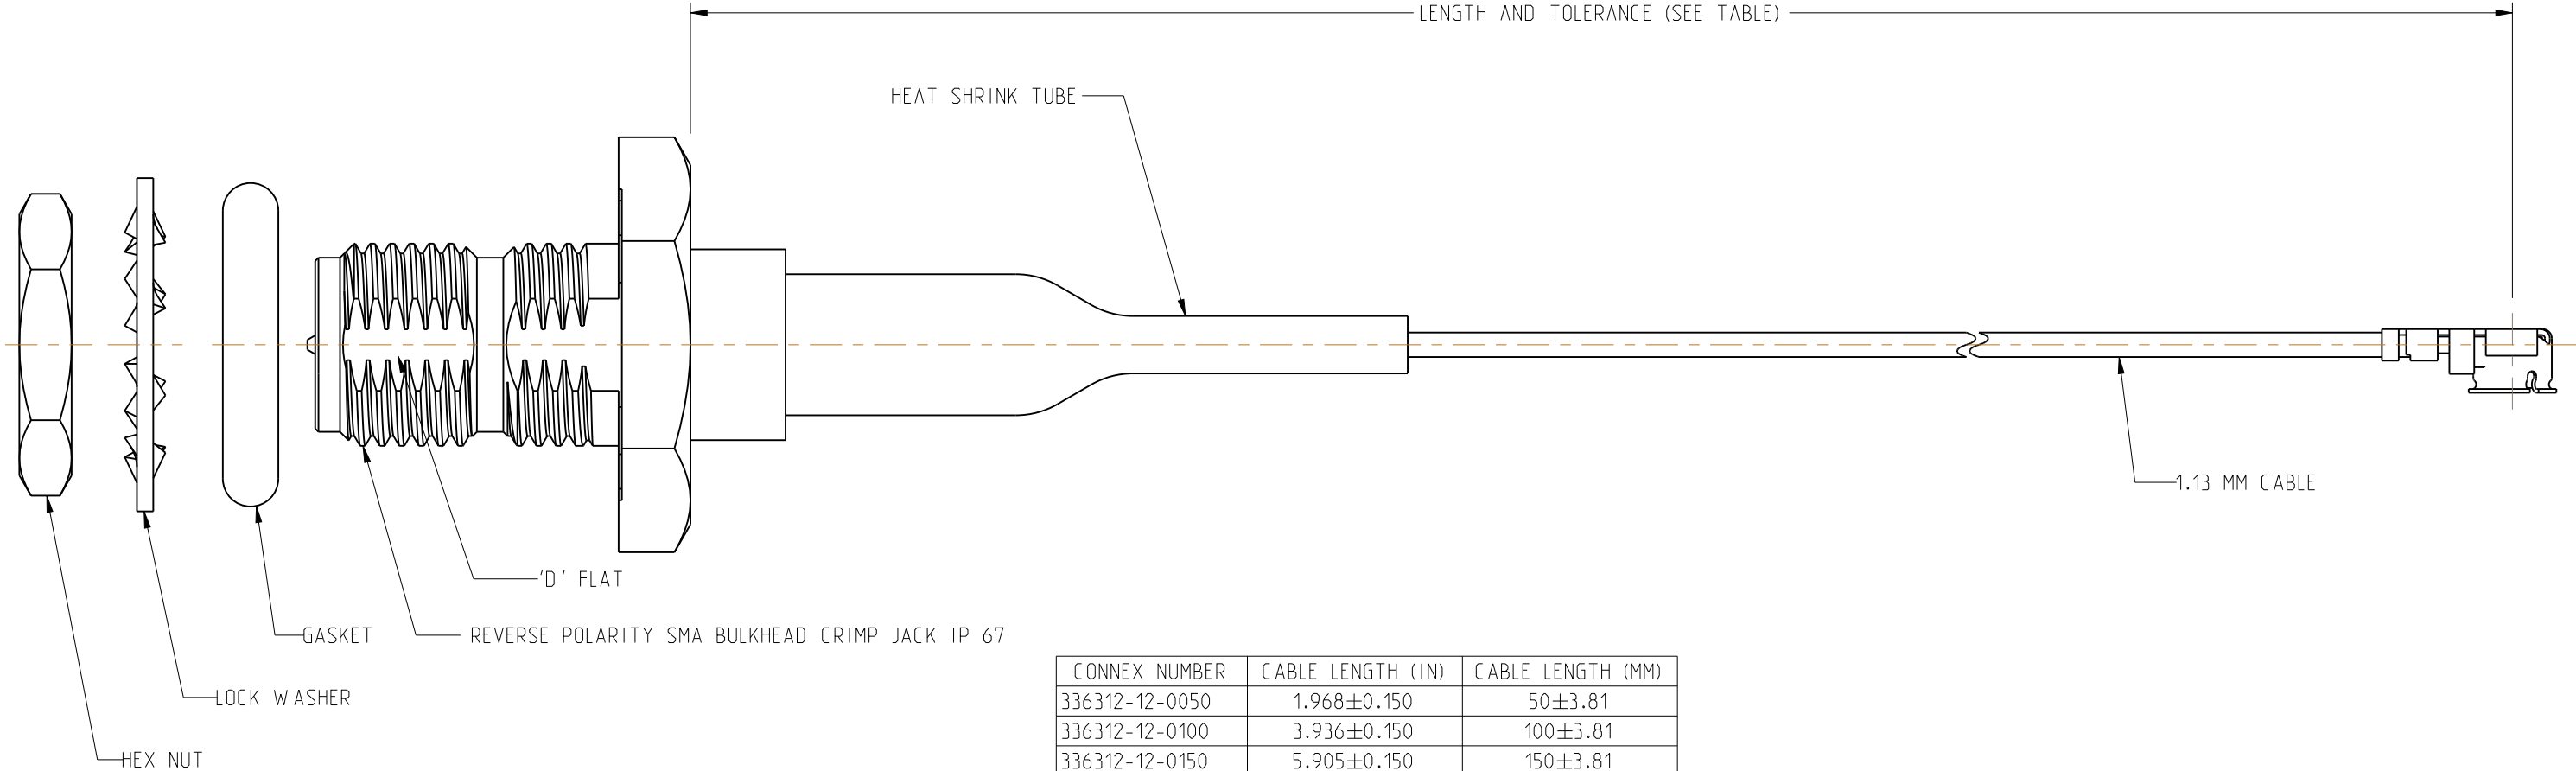


NOTES:

1. MATERIALS AND FINISHES:  
REVERSE POLARITY SMA BULKHEAD CRIMP JACK IP 67 - P/N: 132422RP  
MICRO COAX RIGHT ANGLE PLUG TERMINATED USING 1.13 MM CABLE - P/N: A-1PA-113-XXXB2
2. ELECTRICAL:  
A. IMPEDANCE: 50 OHM, NOMINAL
3. PACKAGING:  
A. QUANTITY: SINGLE PACK  
B. BAG TO BE MARKED: AMPHENOL RF, 336312-12-XXXX, AND DATE CODE

336312-12-XXXX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	09-Feb-11	--	RAK
	B	SEE SHEET 1	08-Jul-14	2751	KR/BG

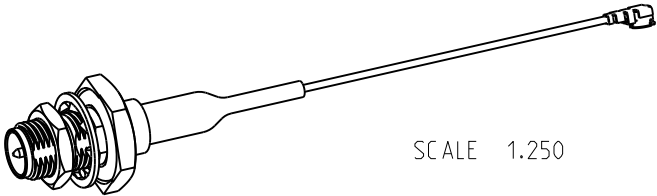

CONNEX NUMBER	CABLE LENGTH (IN)	CABLE LENGTH (MM)
336312-12-0050	1.968±0.150	50±3.81
336312-12-0100	3.936±0.150	100±3.81
336312-12-0150	5.905±0.150	150±3.81
336312-12-0200	7.873±0.200	200±5.08
336312-12-0250	9.842±0.200	250±5.08
336312-12-0300	11.810±0.200	300±5.08

\* ADDITIONAL LENGTHS CAN BE PROVIDED.  
CONTACT AMPHENOL RF MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

☒ FREQUENCY: DC TO 6 GHz

☒ CONTINUITY

☐ VSWR \_\_\_\_\_ : 1 MAX

☒ HI-POT :200 VRMS

☐ INS. LOSS \_\_\_\_\_ dB MAX

☐ OTHER

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL      3 PLACE DECIMAL      ANGLES ±.015 (0,381 mm)      ±.005 (0,127 mm)      ± 1°	MATERIAL  SEE NOTES	DRAWN ABHAYA KISHORE	DATE 09-Feb-11	TITLE REVERSE POLARITY SMA BULKHEAD CRIMP JACK IP 67 TO AMC RIGHT ANGLE PLUG TERMINATED USING 1.13 MM CABLE, VARIOUS LENGTHS	Amphenol Connex		
		ENGINEER ABHAYA KISHORE	DATE 09-Feb-11				
	REFERENCE  TASK - 568	APPROVED B.C. GLEISSNER	DATE 08-Jul-14				
		CAD FILE		DWG SIZE B	DRAWING NO. 336312-12-XXXX		REV B

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[336312-12-0050](#) [336312-12-0100](#) [336312-12-0150](#) [336312-12-0200](#) [336312-12-0250](#) [336312-12-0300](#)