

~~THIS DRAWING IS UNPUBLISHED~~

RELEASED FOR PUBLICATION

2014







© COPYRIGHT 2008

TE Connectivity AMP España S.L.U.


ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APV
	J	ECR-14-002029	08APR2014	LD	JS

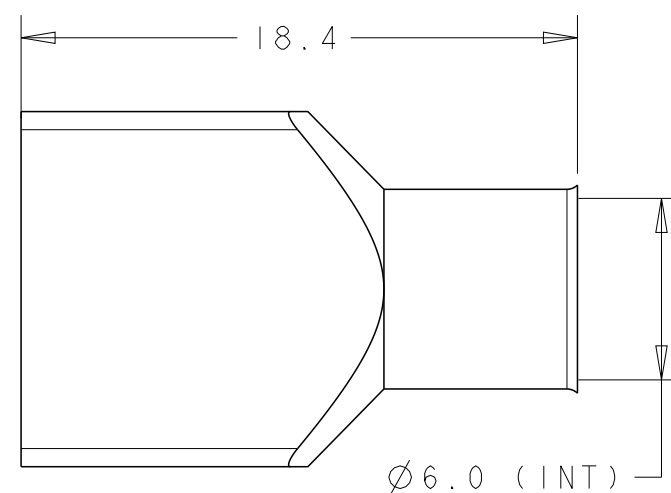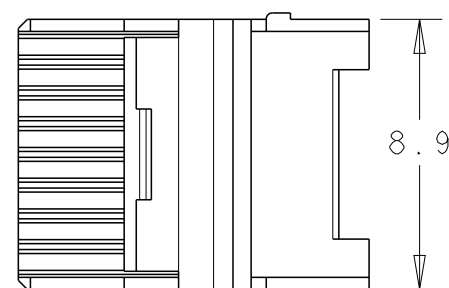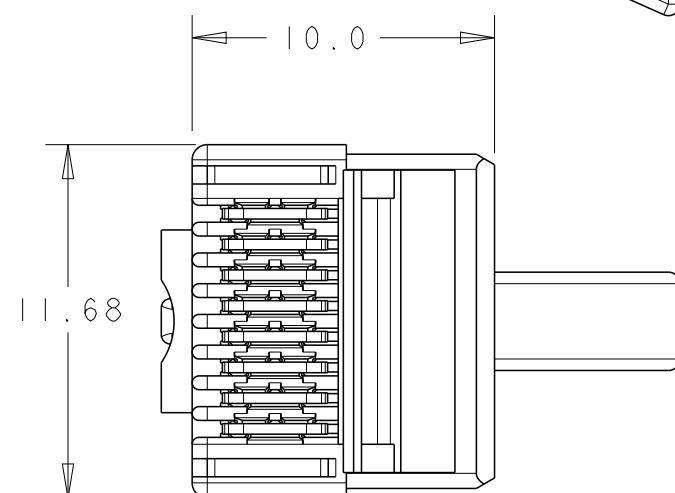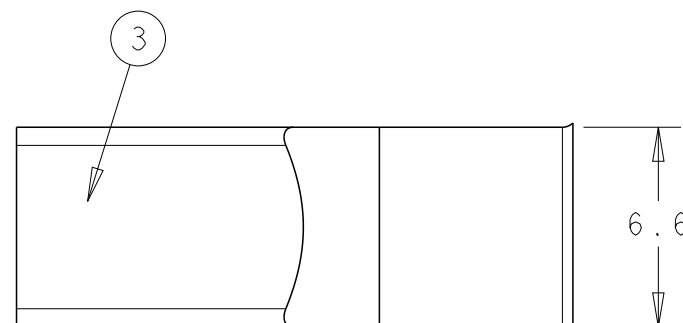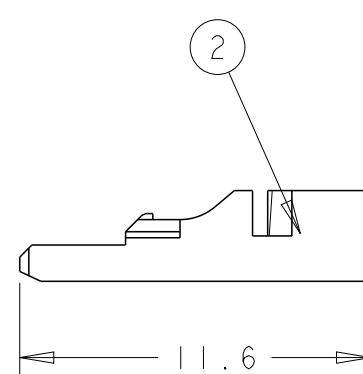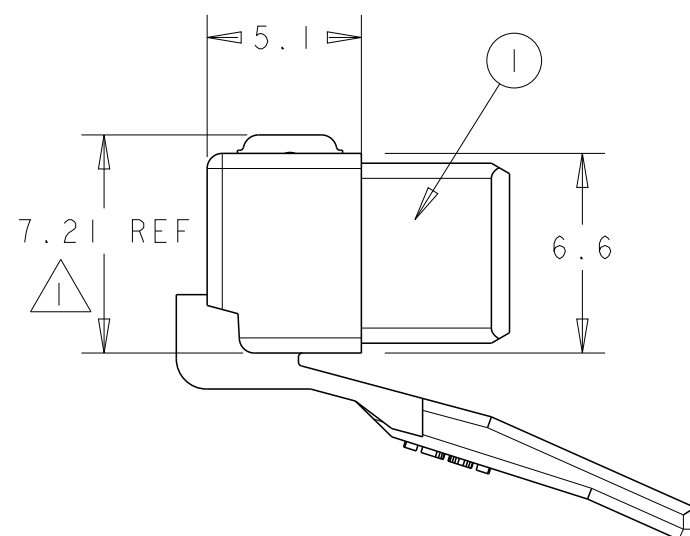

1. TERMINATED DIMENSION 6.02±0.13
2. PACKAGING:
100 SUB-ASSEMBLIES,
100 WIRE HOLDERS AND
100 SHIELDS PER CARTON
3. PACKAGING:
1000 SUB-ASSEMBLIES,
1000 WIRE HOLDERS AND
1000 SHIELDS PER CARTON
4. CABLE RANGE:
- 4 TWISTED PAIRS
- JACKET DIAMETER: FROM 5.3 TO 6.0
- SHIELDING: FOIL AND/OR BRAID
- 24/26 AWG STRANDED WIRE
- INSULATION DIAMETER: FROM 0.8 TO 1.0
5. 0.178 microm [.000007] MINIMUM HARD GOLD
OVER 0.762microm [.000030] MINIMUM
PALLADIUM / NICKEL IN LOCALIZED AREA, OVER
2.54microm [.000100] MINIMUM NICKEL UNDERPLATE.
6. MEET SPECIFICATIONS:
- IEC 60603-7
- TIA/EIA 568-B.2
7. FLAMMABILITY RATING: UL 94V-0

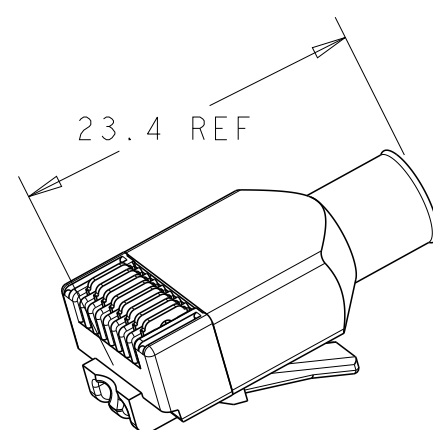

		NICKEL	BRASS	SHIELD	3
		---	PC	WIRE HOLDER	2
		CONTACT: 	PC, PH. BRONZE	ASSY, 8 POSN, SHIELDED, ROUND CABLE, MOD PLUG	1
-2	-1	FINISH	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 10 Aug 12

CHK	10 Aug 12
-----	-----------

A. Carreras

APVD 10 Aug 2012

PRODUCT SPEC

108-19102

100	19102
APPLICATION SPEC	

114-22009

114-22000
WEIGHT

TE Connectivity

FRS 102

NAME: KILT 8 DOSSM CHILD DMD CABLE

RTT, 8 POSN, SHED, RND CABLE,
MOD. PLUG

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[336330-2](#)