

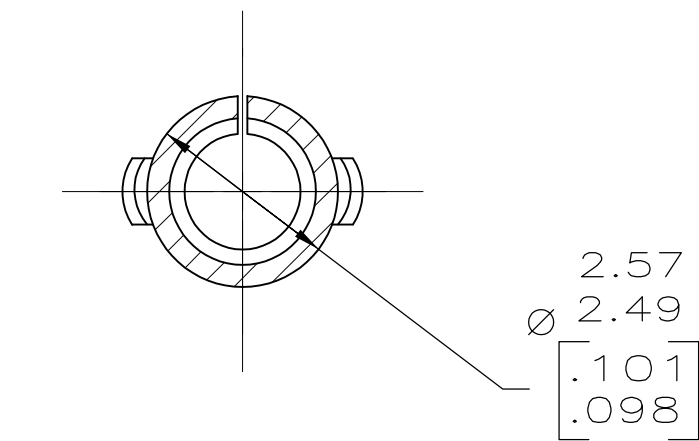
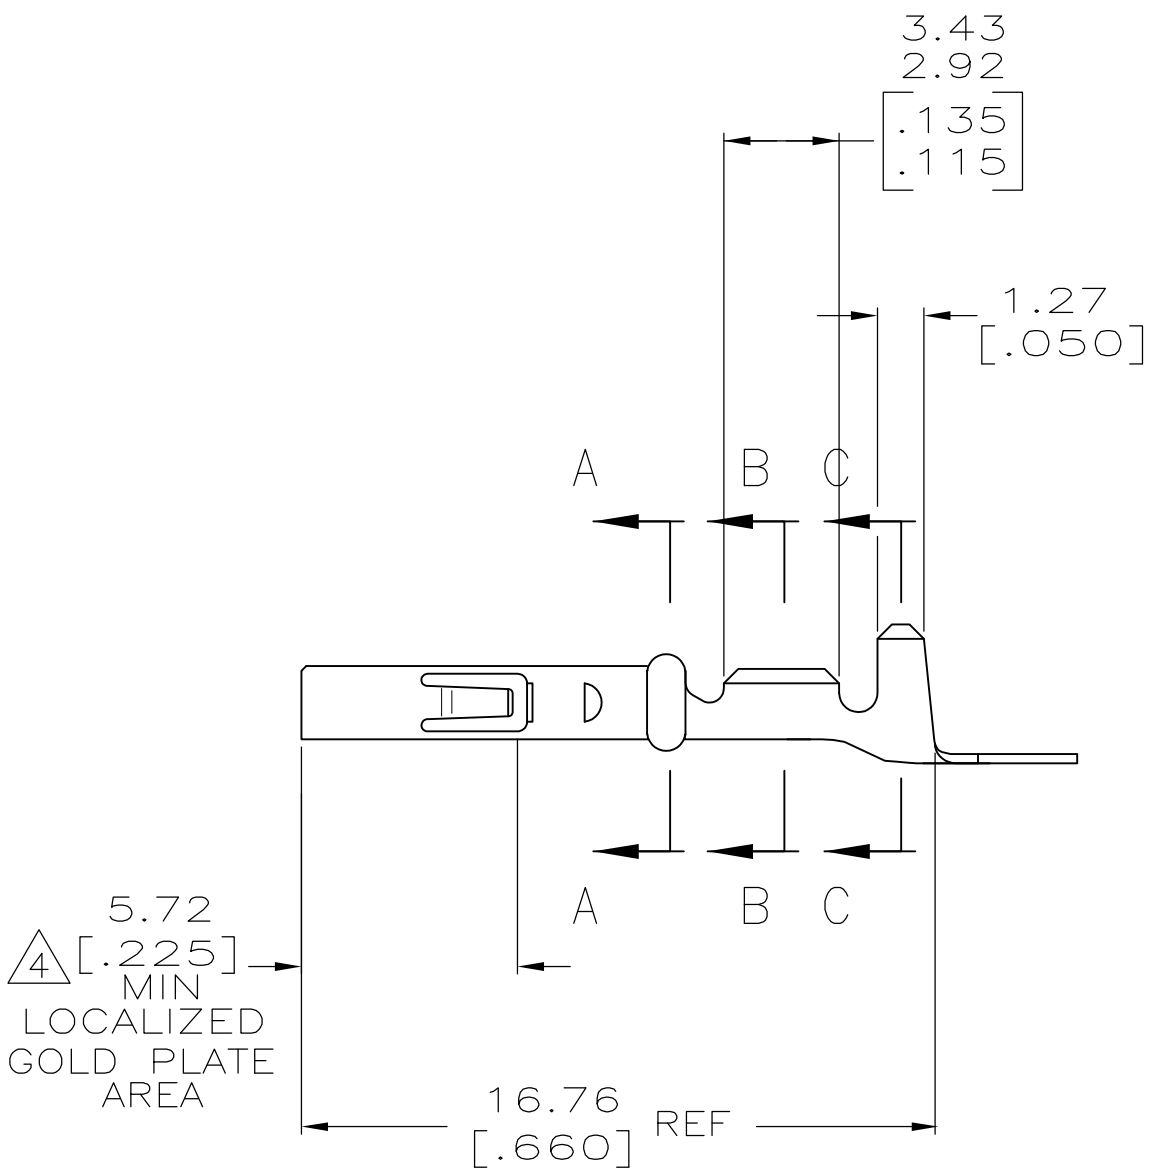
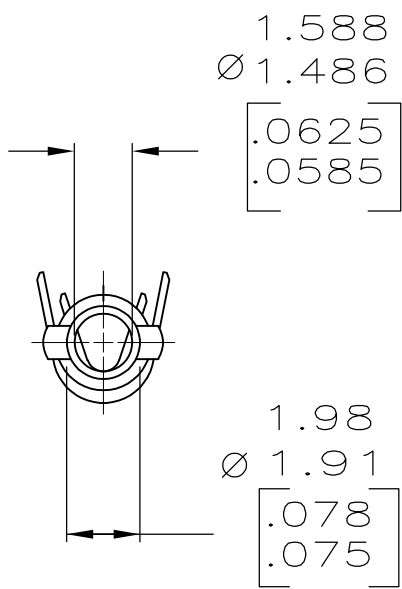


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	0	E1		ECO-07-028871	18JAN08	KW


- 1 WIRE RANGE: 0.12–0.9mm² (26–18 AWG).
- 2 INSULATION RANGE: 1.27–2.92 [.050–.115] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ PLATE INTERNALLY WITH 0.00076 [.000030] MIN GOLD IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.

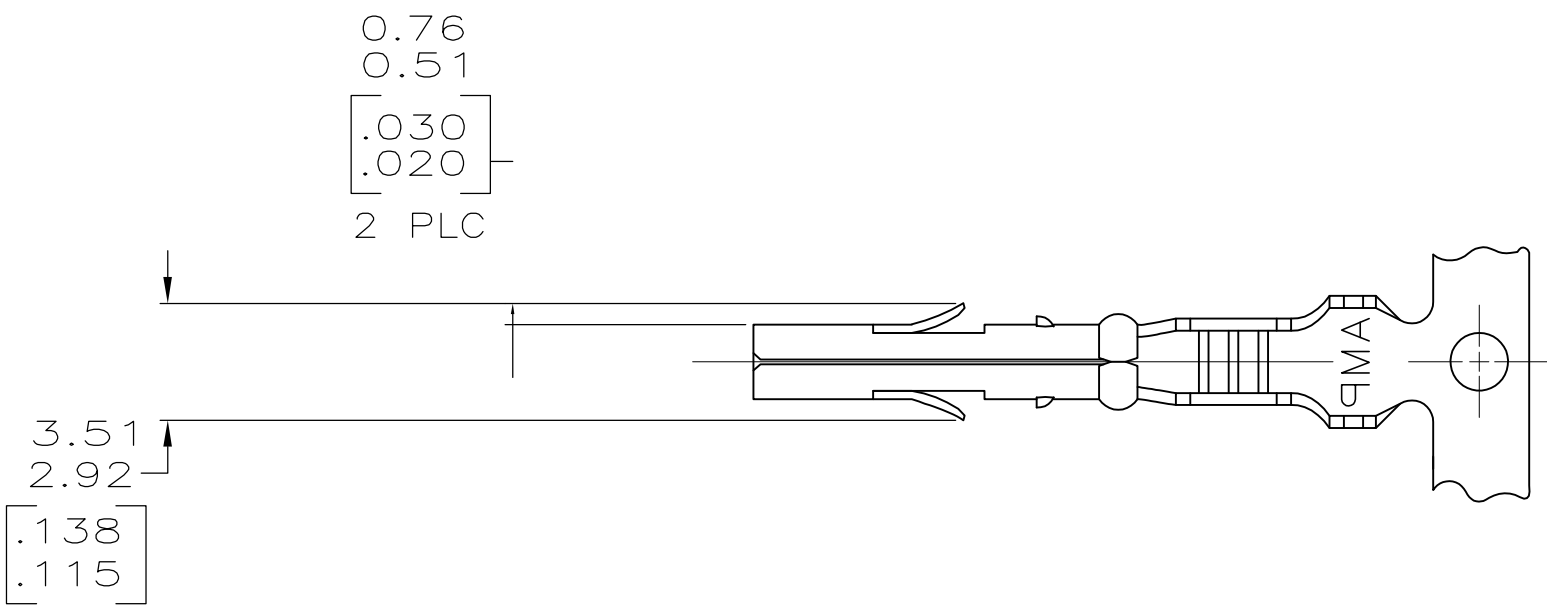

SECTION A–A
SCALE 10:1

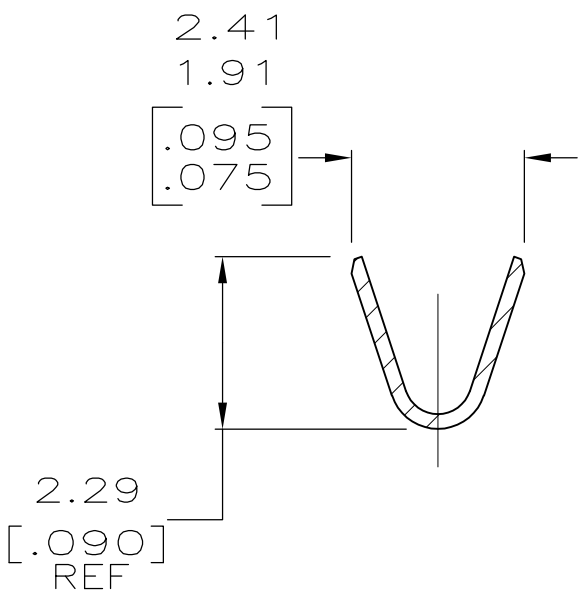

SECTION B–B
SCALE 10:1

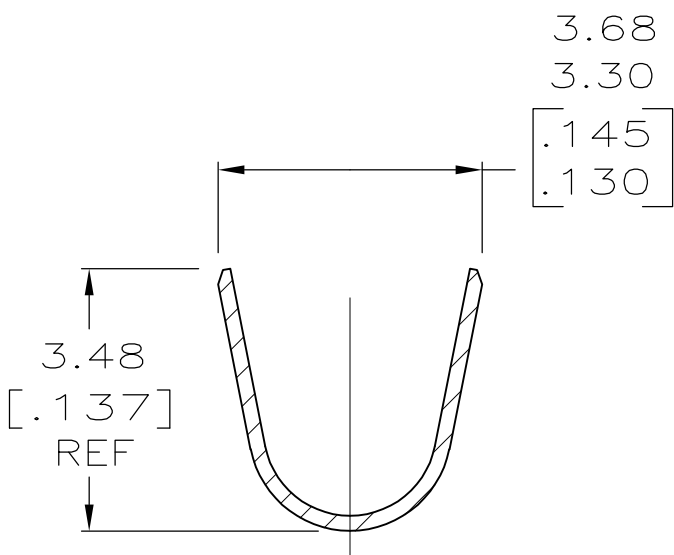

SECTION C–C
SCALE 10:1

△ GOLD STRIPE	0.20 [.008] PHOS BRZ	641294–2
PRE–TIN	0.20 [.008] PHOS BRZ	641294–1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON 9–28–94	Tyco Electronics Corporation Harrisburg, PA 17105–3608	
DIMENSIONS: mm [INCHES]		CHK R. SWING 9–28–94	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		–	PRODUCT SPEC	
0 PLC ± –		–	APPLICATION SPEC	
1 PLC ± –		–	WEIGHT	
2 PLC ± –		–	CUSTOMER DRAWING	
3 PLC ± 0.13 [.005]		–	SCALE 5:1	
4 PLC ± – ± –		–	SHEET 1 OF 1	
ANGLES		–	REV E1	

METRIC