


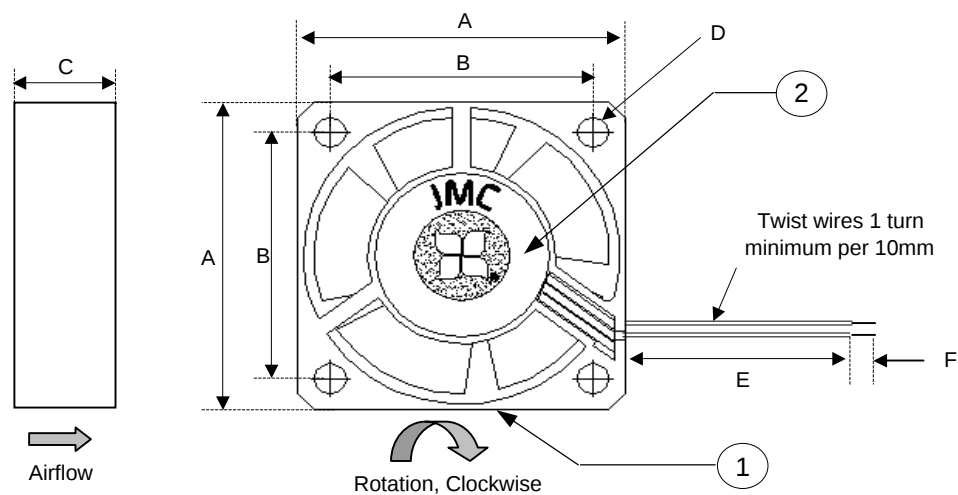


Frame Type (Closed Barrell)

WIRE DESIGNATION	
Wire Color	Function
Black	GND
Red	PWR, 12Vdc

All Dimensions in mm	
A	40 +/- 0.5
B	32 +/- 0.3
C	10.5 +/- 0.5
D	4 x 3.5 +/- 0.3
E	300 +/- 25
F	6.4 +/- 1.0

	ITEM	SPECIFICATION	UNITS / NOTES
MECHANICAL	Speed	6000 +/- 10%	RPM at 12 Vdc
	Airflow	6.4	CFM in Free Air
	Static Pressure	0.11	Inch, H ₂ O
	Bearing Type	Dual Ball	N/A
	Operating Temp	(-)10 to 70	Deg C
	Storage Temp	(-) 40 to 70	Deg C
	Noise Level	27.2	dBA Max at 1M
PHYSICAL	Blade Material	UL 94V-0	N/A
	Frame Material	UL 94V-0	N/A
	Wire Size	28	AWG
	Wire Type	UL 1007	N/A
	Wire Assembly	First Slot	N/A
	Regulatory Approvals	UL CUL TUV	N/A
ELECTRICAL	Net Weight	TBD	Grams
	Operating Voltage	10.8 - 13.2	Vdc
	Starting Voltage	10.8	Vdc
	Rated Current	0.08	Amp
	Input Power	0.96	Watts
	Tach Output	N/A	Pulses/Rev
	Polarity Protection	Yes	N/A
	Motor Protection	By Impedance	N/A

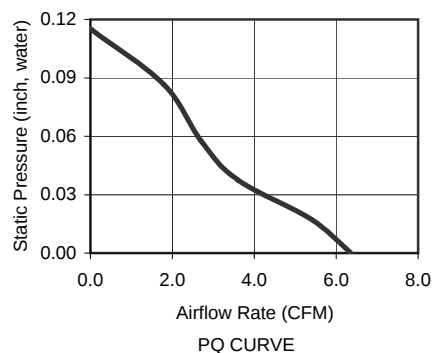

Revision History				
EC No	REV	Date	Description	Approvals
NA	X00	6/1/2008	Created Dwg.	SA

NOTES

1. THIS FAN AND ALL OF ITS COMPONENTS COMPLY WITH THE REQUIREMENTS OF RoHS DIRECTIVE 2002/95/EC
2. BASE MODEL FAN - ANY CHANGES TO SPECIFICATION REQUIRES NEW PART NUMBER.

2	1	Logo Label	L04000B0002	JMC
1	1	Fan Model	4010 - 12	JMC
Item	Qty	Description	Part Number	MFG
Austin Texas, USA Dong Guan, PRC		 Fan, 40 x 10 mm, 12Vdc, Dual Ball, Base Model		
Drawn By S. Apsangi		Size A1	Drawing Number 04000B0002	Rev X00
Engineer J. Elmo		Scale: None Sheet 1 of 1		

PROPRIETARY NOTE

This document is the property of JMC products and contains sensitive and confidential information. Neither this document nor any information it contains may be reproduced or distributed, without written permission by JMC products.