
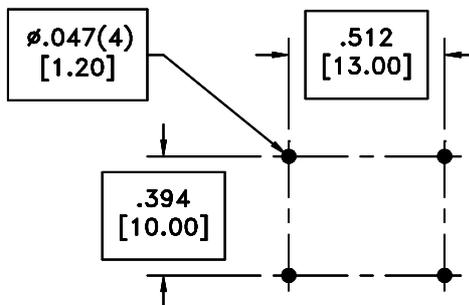


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6B)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

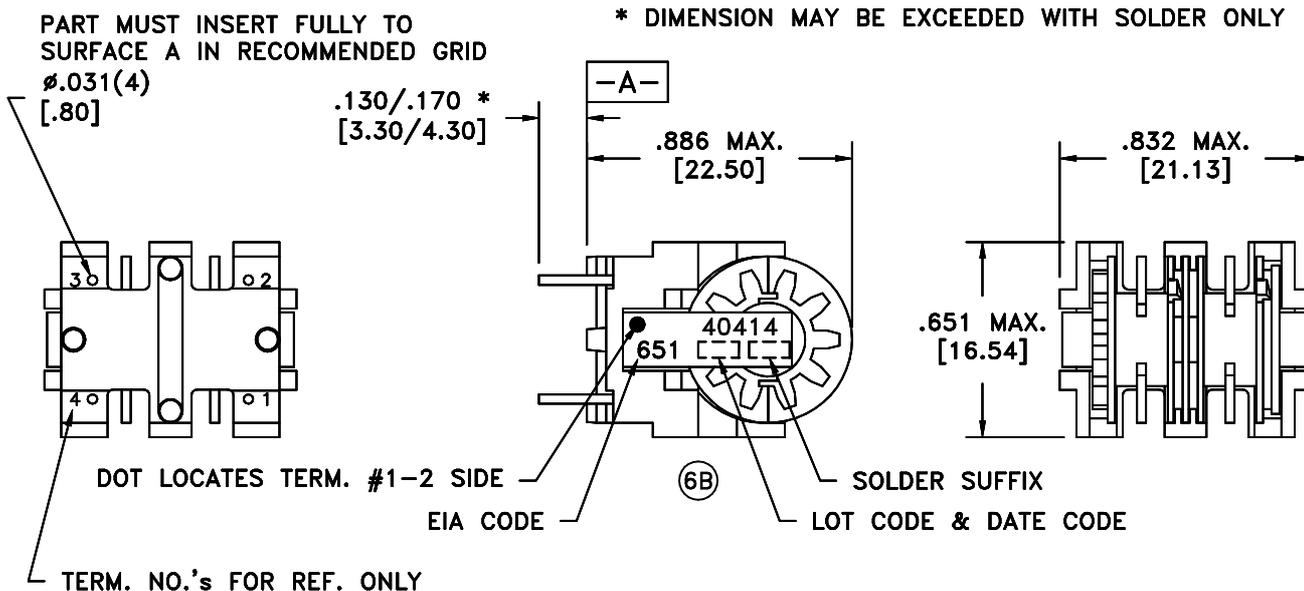

RECOMMENDED
P.C. PATTERN, COMPONENT SIDE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 1-2, 0.467 ohms ±15%.
4-3, 0.467 ohms ±15%.
- DIELECTRIC RATING: 2000VAC, 1 minute tested by applying 2500VAC for 1 second between 1-4; 1-core; 4-core.
- INDUCTANCE: 6.80mH min., 10kHz, 100mVAC, 1-2 Ls.
6.80mH min., 10kHz, 100mVAC, 4-3 Ls.
- TURNS RATIO: (4-3):(1-2) = 1:1, ±1%.
- D.C. CURRENT: 0.7A continuous current based on maximum delta T of 40°C from 25°C.
- OPERATING TEMPERATURE RANGE: -25°C to +115°C.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005[.13]	DRAWING TITLE			DWG.# 40414/-LF1
	INDUCTOR	DRAWING NO.	REV.	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n:	40414/-LF1	6B 3/07	
	REVISIONS: SEE SHEET 1	SCALE ---	SHEET 2 OF 5	