

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		D	REV PER ECO-12-012703	12JUL12	JB	JG

- 1

DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2


MATERIAL: HOUSING— POLYCARBONATE BLUE.
TERMINAL— PHOSPHOR BRONZE, PLATED WITH $1.27\mu\text{m}$ [.000050] MINIMUM THICK GOLD IN LOCALIZED GOLD PLATE AREA OVER $2.54\mu\text{m}$ [.000100] MINIMUM THICK NICKEL UNDERPLATE.
3.

PLUG WILL ACCEPT 26 OR 28 AWG SOLID WIRE, 0.74–0.86 [.029–.034] DIAMETER, WITH AN OVAL CABLE JACKET OF 2.29 X 8.77 [.090 X .345] MAXIMUM.
- 4

TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- 5

1000 ASSEMBLIES PER PACKAGE.
- 6

100 ASSEMBLIES PER PACKAGE.

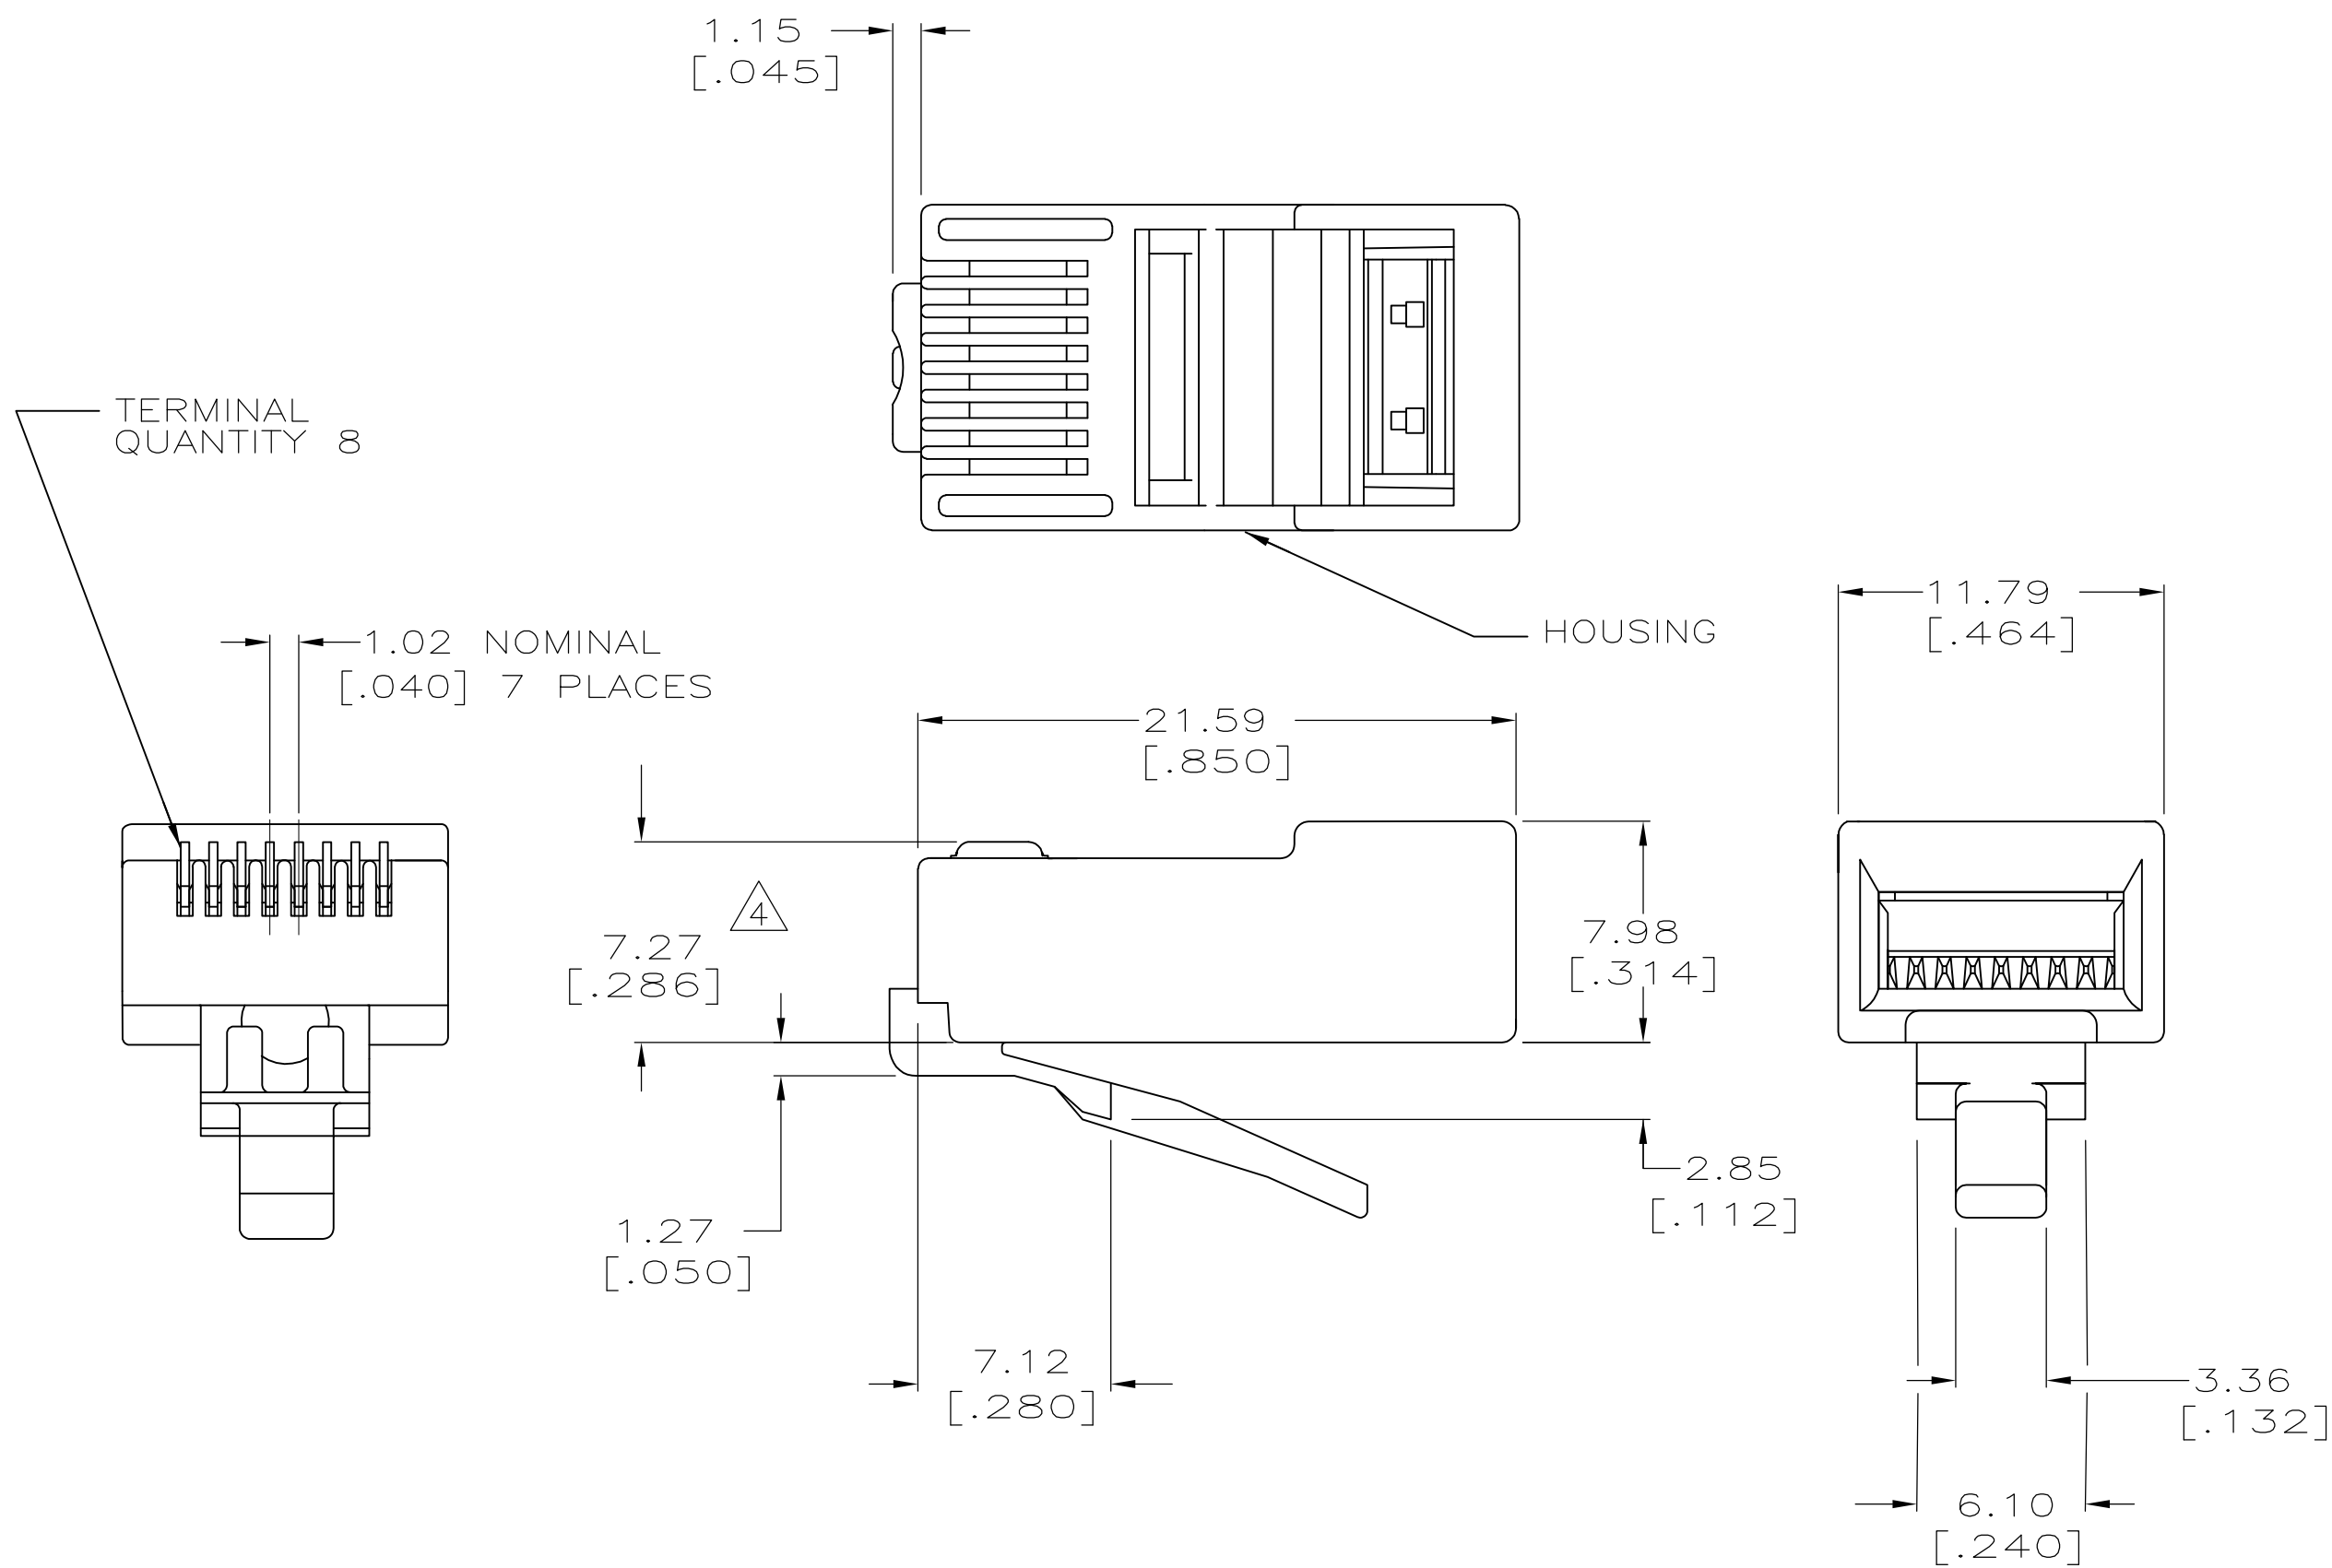

6	5-557972-3
5	5-557972-2
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. SIMPSON 6-9-93	TE TE Connectivity			
DIMENSIONS: INCHES		CHK C. WHITT 6-17-93				
		APVD HAWKINS/MCGRATH 6-21-93	NAME MODULAR PLUG ASSEMBLY, 8 POSITION, LINE, SMALL CONDUCTOR, SOLID WIRE			
		PRODUCT SPEC 108-1163				
MATERIAL		APPLICATION SPEC 114-6016	SIZE A2	CAGE CODE 00779	DRAWING NO C=557972	RESTRICTED TO -
FINISH		WEIGHT -	SCALE 4:1		SHEET 1 of 1	REV D
CUSTOMER DRAWING						