
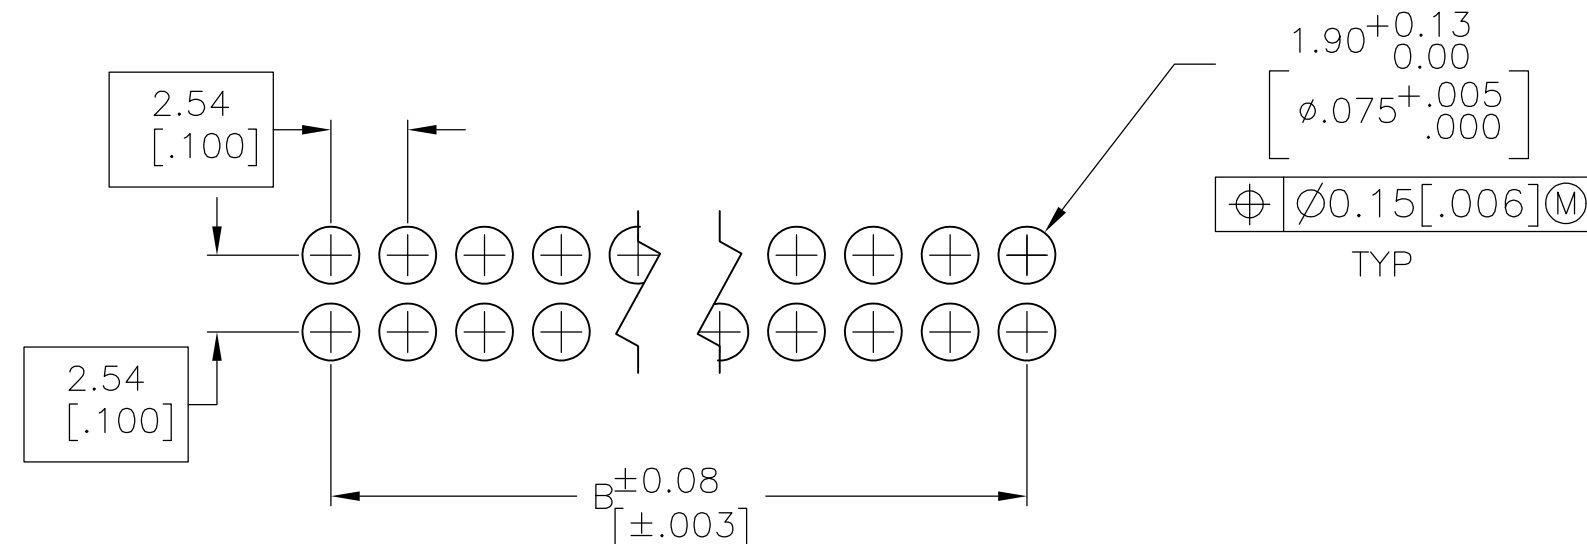


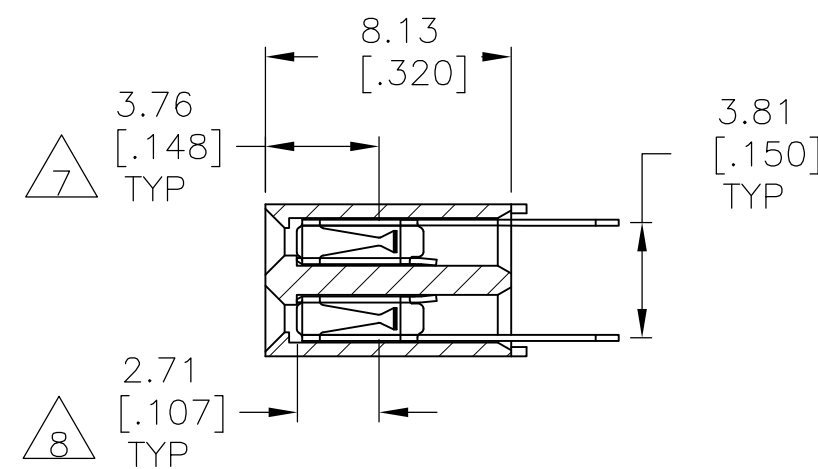

RECOMENDED HOLE LAYOUT  
FOR BOTTOM ENTRY OR PASS  
THROUGH APPLICATIONS

- 1 TE CONNECTIVITY LOGO AND CSA LOGO ARE MOLDED INTO THE HOUSING.
- 2 TOLERANCE NON-CUMULATIVE.
- 3 DUPLEX PLATED: 0.00076 (.000030) GOLD IN CONTACT AREA, .00381-.00762 (.000150-.000300) BRIGHT TIN-LEAD ON LEADS, ALL OVER 0.00127 (.000050) MIN NICKEL.
- 4 THESE DIMENSIONS PERTAIN TO CAVITY C/L'S ONLY, NOT TO CONTACT LOCATIONS.
- 5 NO PART NUMBER MARKING REQUIRED ON THIS PART NUMBER.
- 6 HOUSING: FLAME RETARDANT GLASS FILLED POLYESTER - BLACK.  
CONTACTS: PHOS. BRONZE.
- 7 POINT OF CONTACT DIMENSION.
- 8 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE CONTACT BEAMS).
- 9 DUPLEX PLATED: 0.00076 (.000030) GOLD DUPLEX IN CONTACT AREA, 0.00381-0.00762 (.000150-.000300) MATTE TIN ON LEADS, ALL OVER 0.00127 (.000050) MIN NICKEL.
- 10 ROHS 2002/95/EC COMPLIANT
- 11 PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOCAD

DIST00

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
|   | -   | SEE SHEET 1 | -    | -   | -    |

|   |          |        |       |       |            |       |            |
|---|----------|--------|-------|-------|------------|-------|------------|
| 5 | OBSOLETE | 9      | 1.300 | 1.200 | 26         | 10    | 9-534236-1 |
|   |          | 9      | 4.000 | 3.900 | 80         | 10    | 9-534236-0 |
|   | OBSOLETE | 9      | 3.900 | 3.800 | 78         | 10    | 8-534236-9 |
|   |          | 9      | 3.800 | 3.700 | 76         | 10    | 8-534236-8 |
|   |          | 9      | 3.700 | 3.600 | 74         | 10    | 8-534236-7 |
|   |          | 9      | 3.600 | 3.500 | 72         | 10    | 8-534236-6 |
|   |          | 9      | 3.500 | 3.400 | 70         | 10    | 8-534236-5 |
|   |          | 9      | 3.400 | 3.300 | 68         | 10    | 8-534236-4 |
|   |          | 9      | 3.300 | 3.200 | 66         | 10    | 8-534236-3 |
|   |          | 9      | 3.200 | 3.100 | 64         | 10    | 8-534236-2 |
|   |          | 9      | 3.100 | 3.000 | 62         | 10    | 8-534236-1 |
|   |          | 9      | 3.000 | 2.900 | 60         | 10    | 8-534236-0 |
|   |          | 9      | 2.900 | 2.800 | 58         | 10    | 7-534236-9 |
|   |          | 9      | 2.800 | 2.700 | 56         | 10    | 7-534236-8 |
|   |          | 9      | 2.700 | 2.600 | 54         | 10    | 7-534236-7 |
|   |          | 9      | 2.600 | 2.500 | 52         | 10    | 7-534236-6 |
|   |          | 9      | 2.500 | 2.400 | 50         | 10    | 7-534236-5 |
|   |          | 9      | 2.400 | 2.300 | 48         | 10    | 7-534236-4 |
|   |          | 9      | 2.300 | 2.200 | 46         | 10    | 7-534236-3 |
|   |          | 9      | 2.200 | 2.100 | 44         | 10    | 7-534236-2 |
|   |          | 9      | 2.100 | 2.000 | 42         | 10    | 7-534236-1 |
|   |          |        |       | 9     | 2.000      | 1.900 | 40         |
| 9 | 1.900    |        |       | 1.800 | 38         | 10    | 6-534236-9 |
|   | OBSOLETE | 9      | 1.800 | 1.700 | 36         | 10    | 6-534236-8 |
|   | OBSOLETE | 9      | 1.700 | 1.600 | 34         | 10    | 6-534236-7 |
|   |          | 9      | 1.600 | 1.500 | 32         | 10    | 6-534236-6 |
|   | OBSOLETE | 9      | 1.500 | 1.400 | 30         | 10    | 6-534236-5 |
|   |          | 9      | 1.400 | 1.300 | 28         | 10    | 6-534236-4 |
|   | OBSOLETE | 9      | 1.300 | 1.200 | 26         | 10    | 6-534236-3 |
|   |          | 9      | 1.200 | 1.100 | 24         | 10    | 6-534236-2 |
|   | OBSOLETE | 9      | 1.100 | 1.000 | 22         | 10    | 6-534236-1 |
|   | OBSOLETE | 9      | 1.000 | .900  | 20         | 10    | 6-534236-0 |
|   |          | 9      | .900  | .800  | 18         | 10    | 5-534236-9 |
|   |          | 9      | .800  | .700  | 16         | 10    | 5-534236-8 |
|   |          | 9      | .700  | .600  | 14         | 10    | 5-534236-7 |
|   |          | 9      | .600  | .500  | 12         | 10    | 5-534236-6 |
|   |          | 5      | .500  | .400  | 10         | 10    | 5-534236-5 |
| 5 | OBSOLETE | 9      | .400  | .300  | 8          | 10    | 5-534236-4 |
| 5 | OBSOLETE | 9      | .300  | .200  | 6          | 10    | 5-534236-3 |
| 5 | OBSOLETE | 9      | .200  | .100  | 4          | 10    | 5-534236-2 |
| 5 | OBSOLETE | 9      | .100  | -     | 2          | 10    | 5-534236-1 |
|   |          | FINISH | A     | B     | NO OF POSN |       | PART NO.   |

|    |          |          |       |       |            |            |            |          |
|----|----------|----------|-------|-------|------------|------------|------------|----------|
| 5  | 12       | OBSOLETE | 3     | 1.300 | 1.200      | 26         | 4-534236-1 |          |
|    |          |          | 3     | 4.000 | 3.900      | 80         | 4-534236-0 |          |
|    |          | OBSOLETE | 3     | 3.900 | 3.800      | 78         | 3-534236-9 |          |
|    |          |          | 3     | 3.800 | 3.700      | 76         | 3-534236-8 |          |
|    |          | OBSOLETE | 3     | 3.700 | 3.600      | 74         | 3-534236-7 |          |
|    |          |          | 3     | 3.600 | 3.500      | 72         | 3-534236-6 |          |
|    |          | OBSOLETE | 3     | 3.500 | 3.400      | 70         | 3-534236-5 |          |
|    |          |          | 3     | 3.400 | 3.300      | 68         | 3-534236-4 |          |
|    |          | OBSOLETE | 3     | 3.300 | 3.200      | 66         | 3-534236-3 |          |
|    |          |          | 3     | 3.200 | 3.100      | 64         | 3-534236-2 |          |
| 12 | OBSOLETE | 3        | 3.100 | 3.000 | 62         | 3-534236-1 |            |          |
|    | OBSOLETE | 3        | 3.000 | 2.900 | 60         | 3-534236-0 |            |          |
|    |          | 3        | 2.900 | 2.800 | 58         | 2-534236-9 |            |          |
|    | OBSOLETE | 3        | 2.800 | 2.700 | 56         | 2-534236-8 |            |          |
|    |          | 3        | 2.700 | 2.600 | 54         | 2-534236-7 |            |          |
| 12 | OBSOLETE | 3        | 2.600 | 2.500 | 52         | 2-534236-6 |            |          |
|    |          |          | 3     | 2.500 | 2.400      | 50         | 2-534236-5 |          |
|    |          |          | 3     | 2.400 | 2.300      | 48         | 2-534236-4 |          |
| 12 | OBSOLETE | 3        | 2.300 | 2.200 | 46         | 2-534236-3 |            |          |
|    |          |          | 3     | 2.200 | 2.100      | 44         | 2-534236-2 |          |
|    |          |          | 3     | 2.100 | 2.000      | 42         | 2-534236-1 |          |
| 12 | OBSOLETE | 3        | 2.000 | 1.900 | 40         | 2-534236-0 |            |          |
|    |          |          | 3     | 1.900 | 1.800      | 38         | 1-534236-9 |          |
|    |          |          | 3     | 1.800 | 1.700      | 36         | 1-534236-8 |          |
|    |          |          | 3     | 1.700 | 1.600      | 34         | 1-534236-7 |          |
|    |          |          | 3     | 1.600 | 1.500      | 32         | 1-534236-6 |          |
|    |          |          | 3     | 1.500 | 1.400      | 30         | 1-534236-5 |          |
|    |          |          | 3     | 1.400 | 1.300      | 28         | 1-534236-4 |          |
|    |          |          | 3     | 1.300 | 1.200      | 26         | 1-534236-3 |          |
|    |          |          | 3     | 1.200 | 1.100      | 24         | 1-534236-2 |          |
| 12 | OBSOLETE | 3        | 1.100 | 1.000 | 22         | 1-534236-1 |            |          |
|    |          |          | 3     | 1.000 | .900       | 20         | 1-534236-0 |          |
|    |          |          | 3     | .900  | .800       | 18         | 534236-9   |          |
|    |          |          | 3     | .800  | .700       | 16         | 534236-8   |          |
|    |          |          | 3     | .700  | .600       | 14         | 534236-7   |          |
|    |          |          | 3     | .600  | .500       | 12         | 534236-6   |          |
|    |          |          | 3     | .500  | .400       | 10         | 5          | 534236-5 |
|    |          |          | 3     | .400  | .300       | 8          | 5          | 534236-4 |
|    |          |          | 3     | .300  | .200       | 6          | 5          | 534236-3 |
|    | OBSOLETE | 3        | .200  | .100  | 4          | 5          | 534236-2   |          |
|    |          | 3        | .100  | -     | 2          | 5          | 534236-1   |          |
|    |          | FINISH   | A     | B     | NO OF POSN |            | PART NO.   |          |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

MATERIAL

6

FINISH

3 9

DWN R. BOLES 19-11-92

CHK T. KINSEY 19-11-92

APVD -

PRODUCT SPEC 108-25026

APPLICATION SPEC 114-25018

WEIGHT -

CUSTOMER DRAWING

NAME

ASSEMBLY, MOD II DOUBLE ROW, .100 X .100 C/L, VERTICAL MOUNTED, CLOSED ENTRY, SHORT PT. CONTACTS

SIZE A2

CAGE CODE 00779

DRAWING NO C=534236

RESTRICTED TO -

SCALE 4:1

SHEET 2 OF 2

REV V2

1471-9 (3/11)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[534236-7](#)