



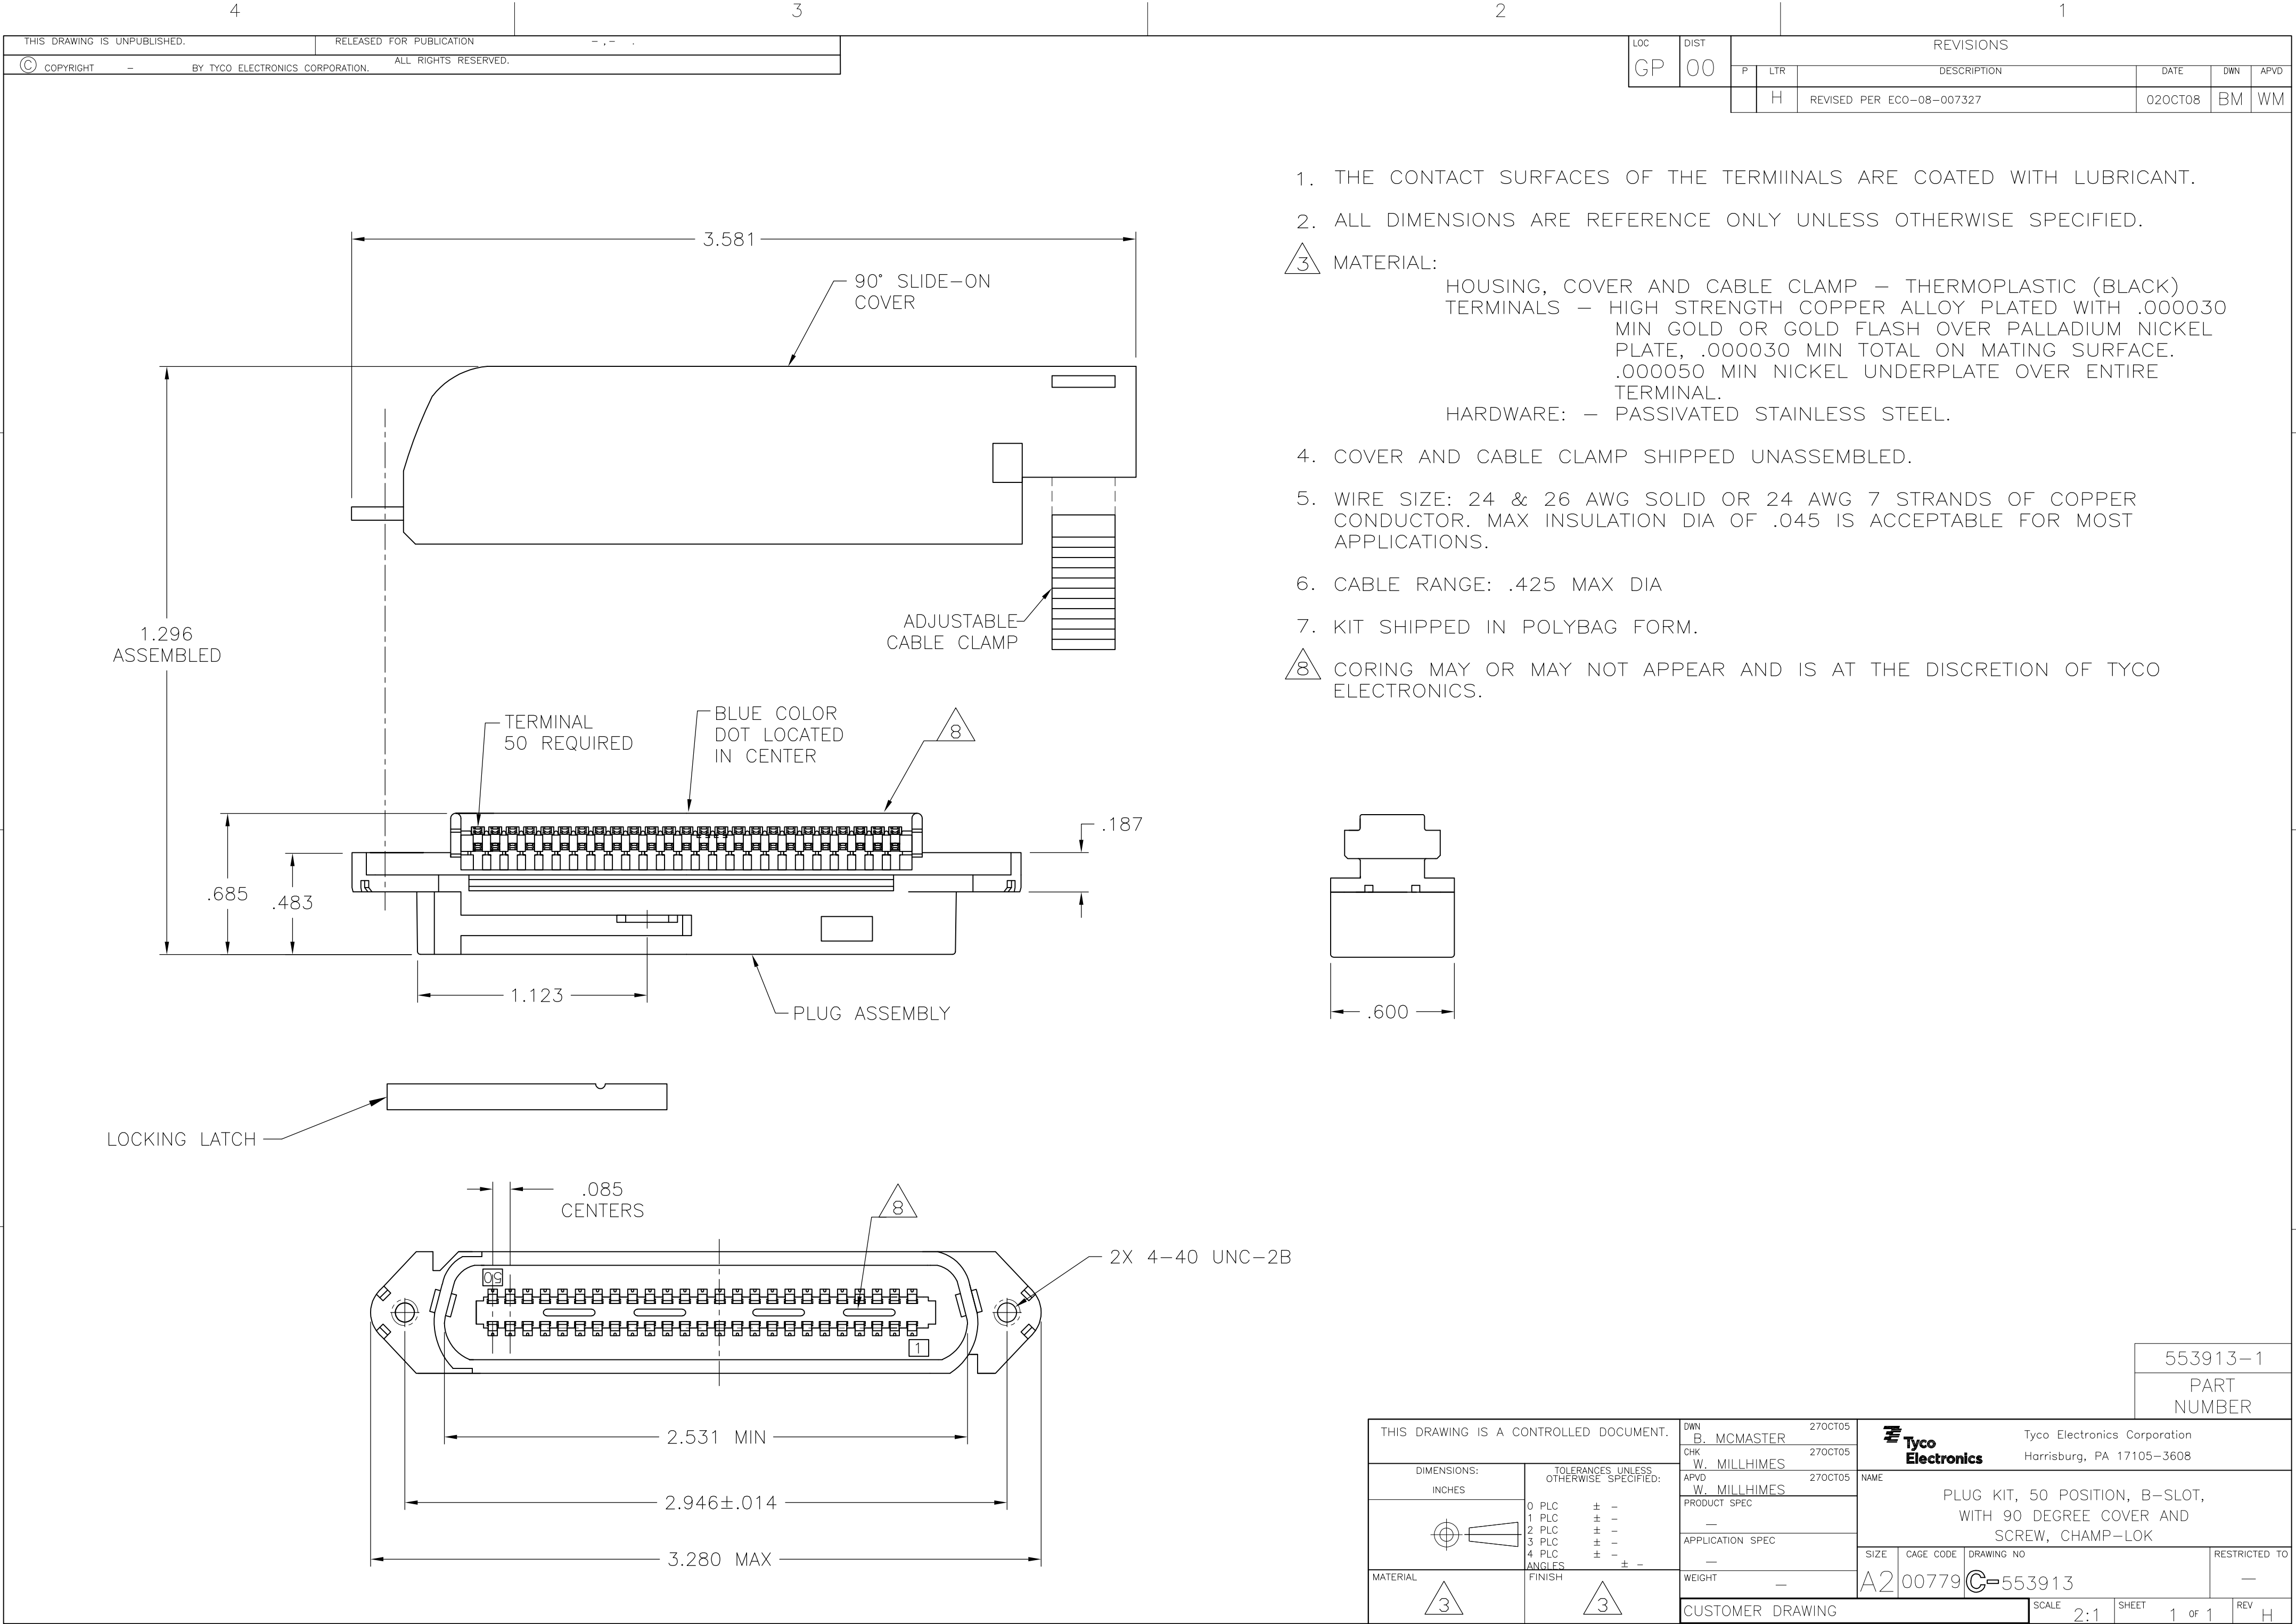

1. THE CONTACT SURFACES OF THE TERMIINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
- 3 MATERIAL:
HOUSING, COVER AND CABLE CLAMP — THERMOPLASTIC (BLACK)
TERMINALS — HIGH STRENGTH COPPER ALLOY PLATED WITH .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, .000030 MIN TOTAL ON MATING SURFACE.
.000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
HARDWARE: — PASSIVATED STAINLESS STEEL.
4. COVER AND CABLE CLAMP SHIPPED UNASSEMBLED.
5. WIRE SIZE: 24 & 26 AWG SOLID OR 24 AWG 7 STRANDS OF COPPER CONDUCTOR. MAX INSULATION DIA OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
6. CABLE RANGE: .425 MAX DIA
7. KIT SHIPPED IN POLYBAG FORM.
- 8 CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

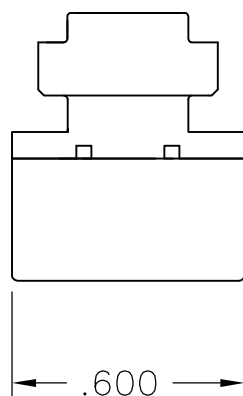

LOC	DIST	REVISIONS			
GP	00	P	LTR	DESCRIPTION	DATE
		H		REVISED PER ECO-08-007327	02OCT08

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER	27OCT05	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK W. MILLHIMES	27OCT05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. MILLHIMES	27OCT05	NAME PLUG KIT, 50 POSITION, B-SLOT, WITH 90 DEGREE COVER AND SCREW, CHAMP-LOK	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C=553913
MATERIAL 3		FINISH 3	CUSTOMER DRAWING		RESTRICTED TO —
		SCALE 2:1	SHEET 1 of 1	REV H	