


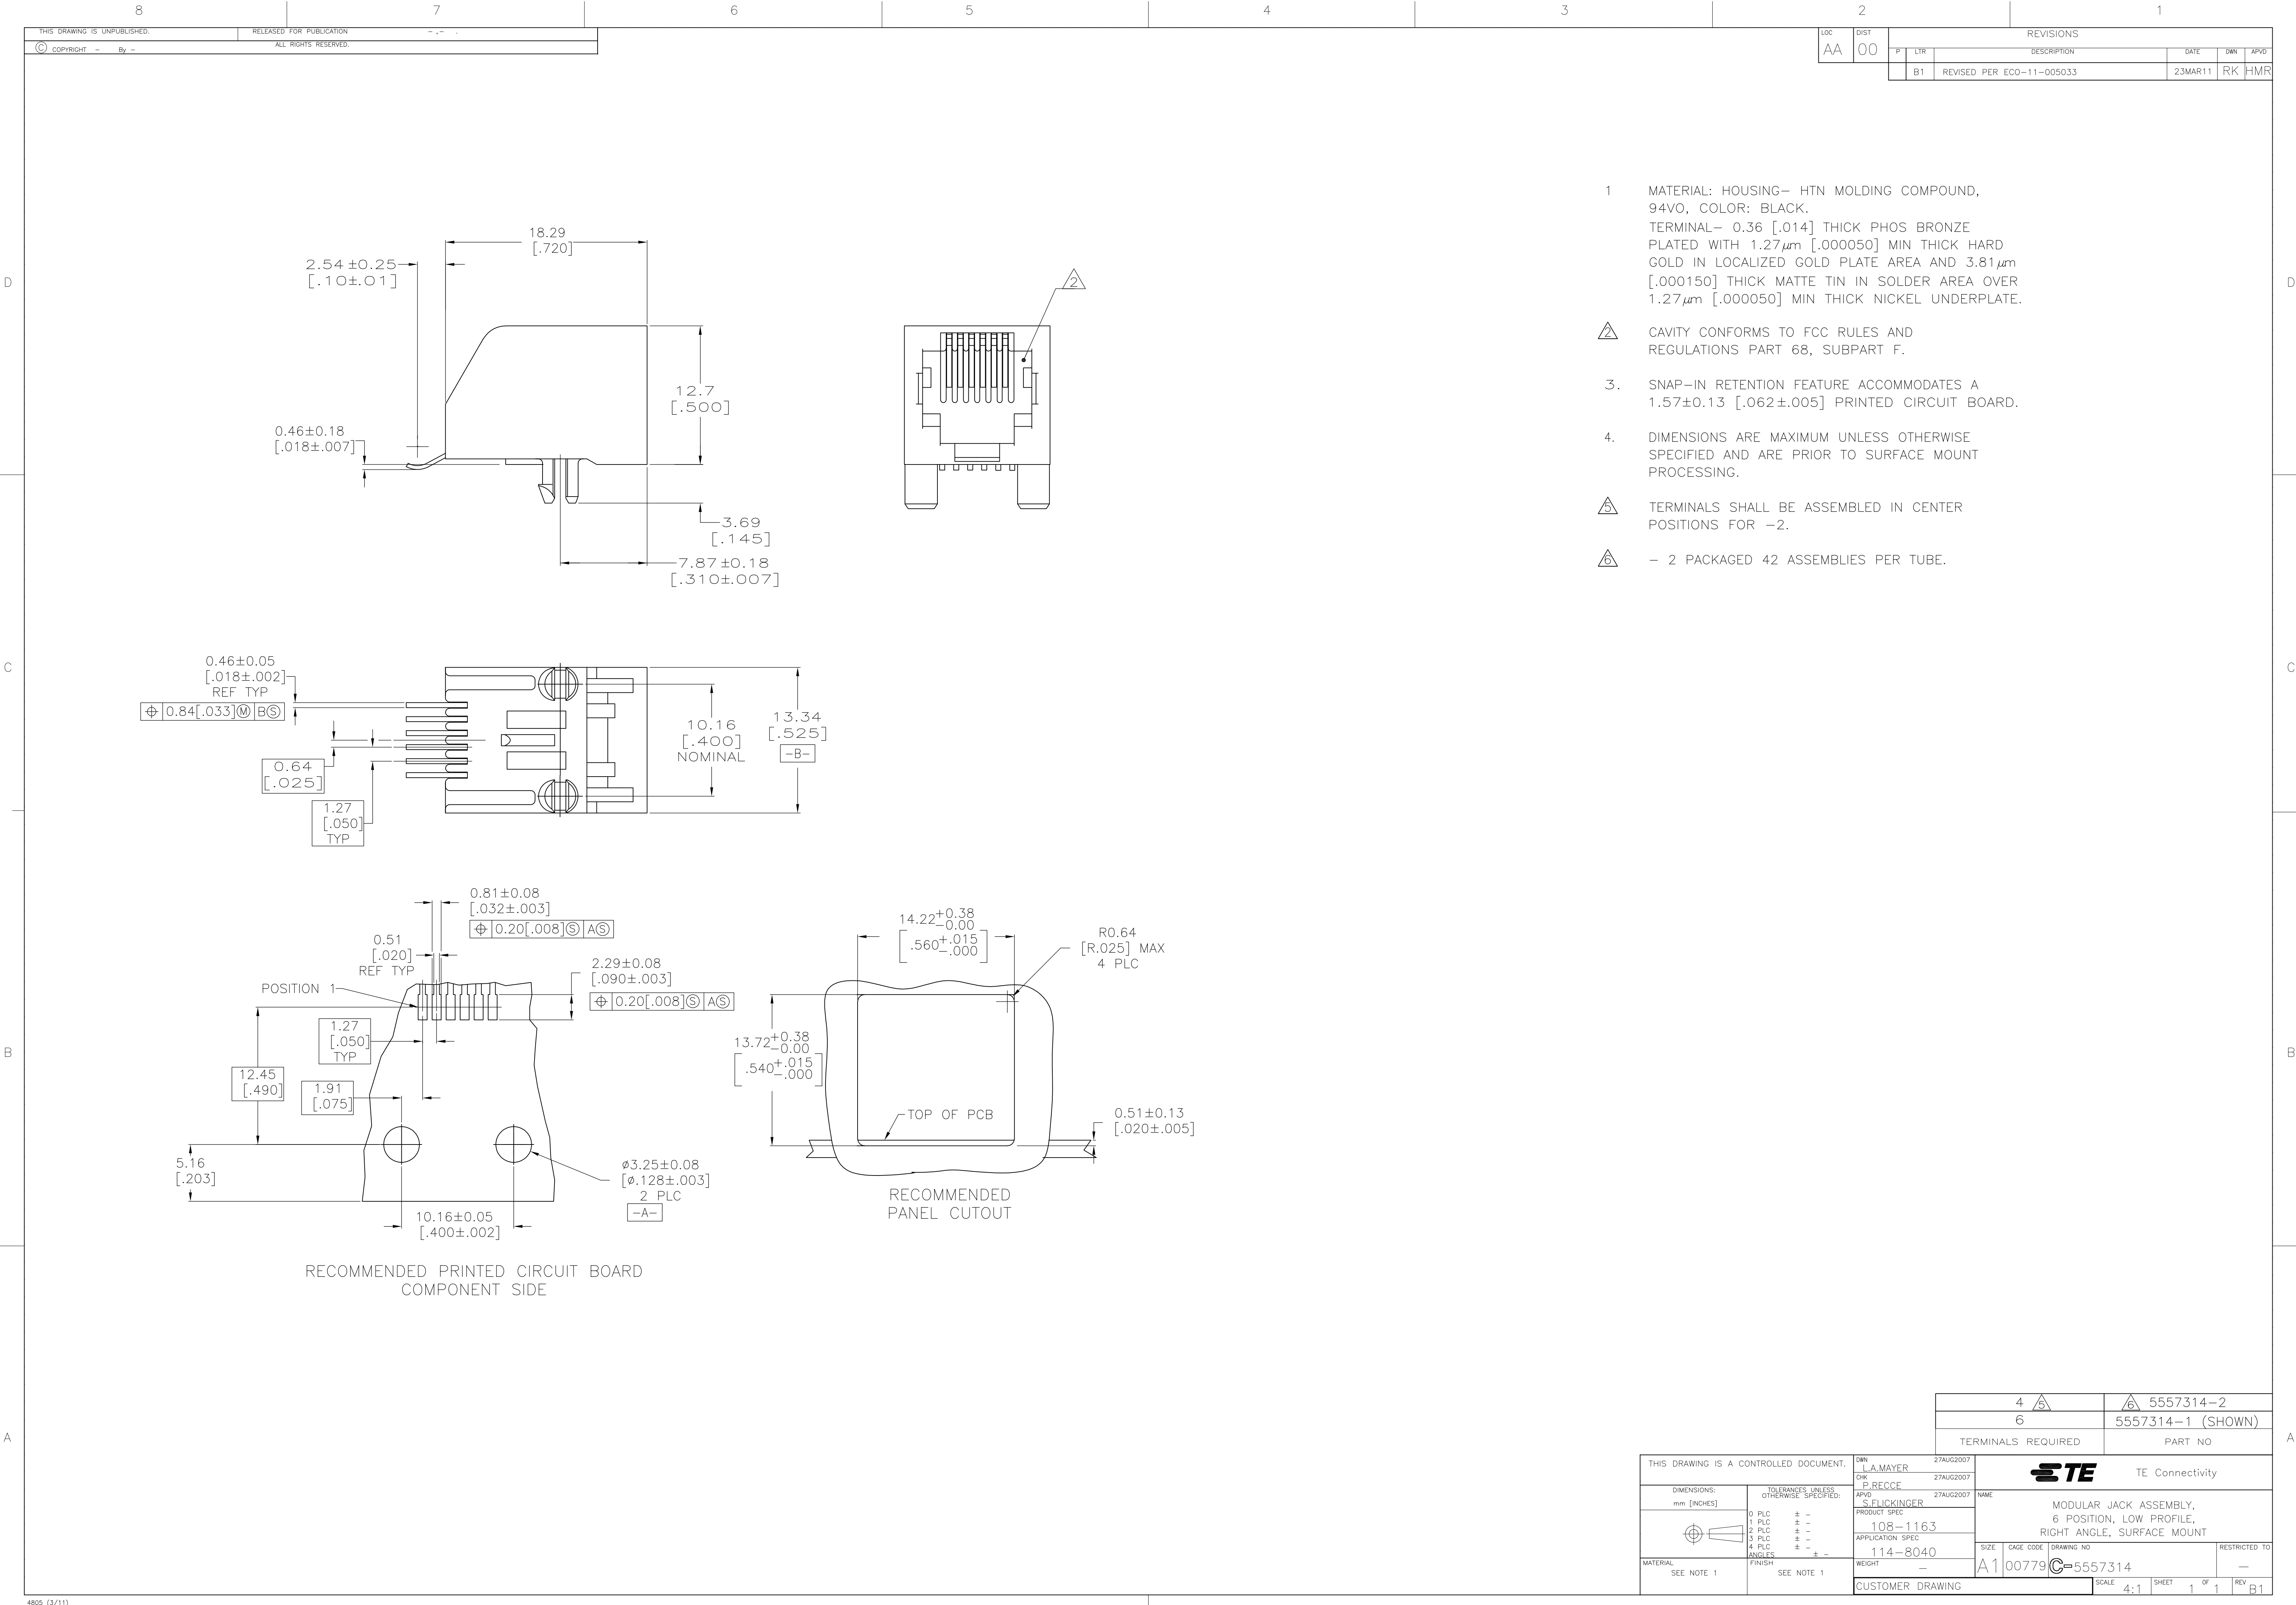

- 1 MATERIAL: HOUSING— HTN MOLDING COMPOUND, 94VO, COLOR: BLACK.
TERMINAL— 0.36 [.014] THICK PHOS BRONZE PLATED WITH 1.27 μ m [.000050] MIN THICK HARD GOLD IN LOCALIZED GOLD PLATE AREA AND 3.81 μ m [.000150] THICK MATTE TIN IN SOLDER AREA OVER 1.27 μ m [.000050] MIN THICK NICKEL UNDERPLATE.
- 2 CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
3. SNAP-IN RETENTION FEATURE ACCOMMODATES A 1.57±0.13 [.062±.005] PRINTED CIRCUIT BOARD.
4. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED AND ARE PRIOR TO SURFACE MOUNT PROCESSING.
- 5 TERMINALS SHALL BE ASSEMBLED IN CENTER POSITIONS FOR -2.
- 6 - 2 PACKAGED 42 ASSEMBLIES PER TUBE.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.A.MAYER 27AUG2007	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK P.RECCE 27AUG2007	NAME	
		APVD S.FLICKINGER 27AUG2007	PRODUCT SPEC	
			108-1163	
			APPLICATION SPEC	
MATERIAL SEE NOTE 1		WEIGHT —	SIZE A1	RESTRICTED TO —
TOLERANCES UNLESS OTHERWISE SPECIFIED:		SCALE 4:1	CAGE CODE 00779	REV B1
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		CUSTOMER DRAWING		
SEE NOTE 1		SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5557314-1](#)