

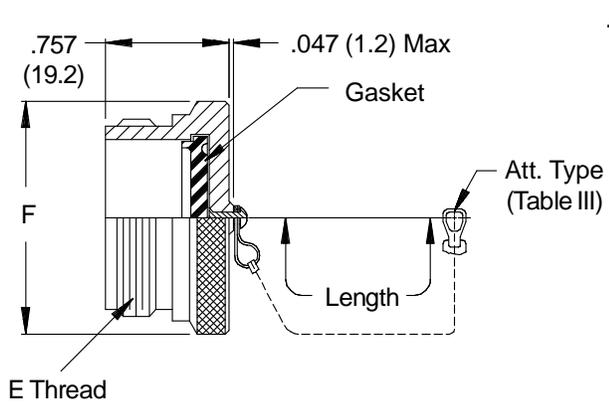


**660-021 (Plug) - 660-022 (Receptacle)
Protective Covers
MIL-C-83723 Series III Threaded**

**MIL-C-83723
Series III
Threaded**

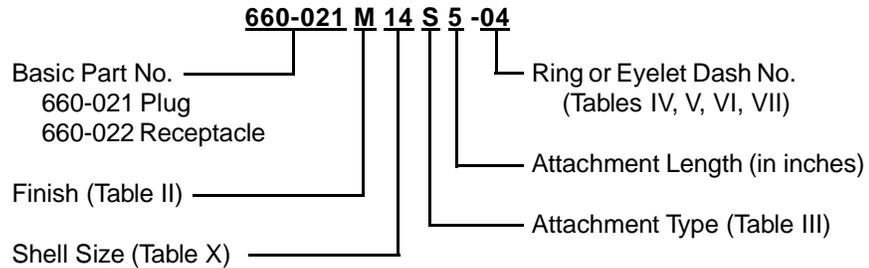

660-021 Plug Cover

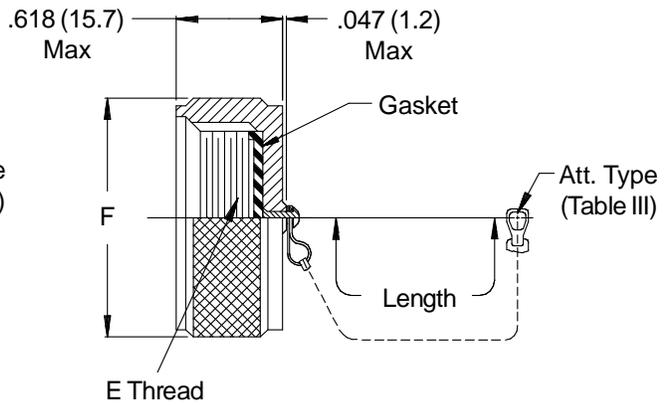

660-022 Receptacle Cover

TABLE X: SHELL SIZE DIMENSIONS

Shell Size	E Thread Class 2A/2B	F Dia Max
08	9/16 - 24 UNEF	.776 (19.7)
10	11/16 - 24 UNEF	.906 (23.0)
12	7/8 - 20 UNEF	1.078 (27.4)
14	15/16 - 20 UNEF	1.141 (29.0)
16	1 1/16 - 18 UNEF	1.266 (32.2)
18	1 3/16 - 18 UNEF	1.375 (34.9)
20	1 5/16 - 18 UNEF	1.510 (38.4)
22	1 7/16 - 18 UNEF	1.625 (41.3)
24	1 9/16 - 18 UNEF	1.760 (44.7)

See inside back cover fold-out or page 14 for Table II.

Metric dimensions (mm) are indicated in parentheses.

**660-021 (Plug) - 660-022 (Receptacle)
Protective Covers
MIL-C-83723 Series III Threaded**



66 & 78

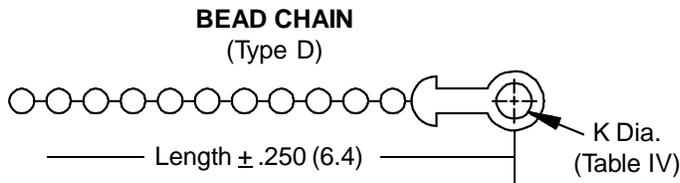
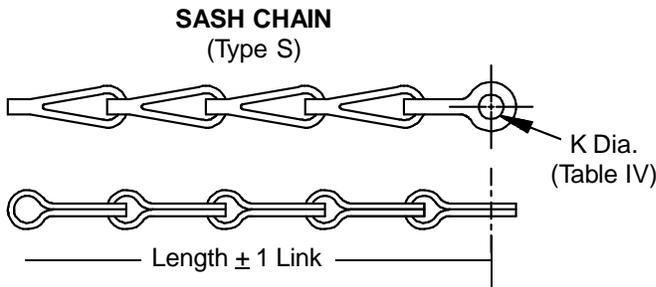
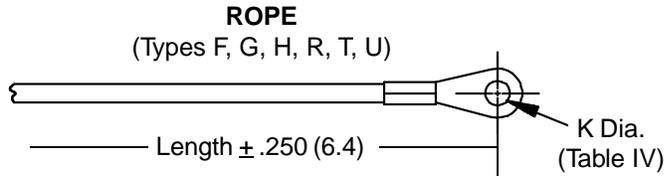


TABLE III: ATTACHMENT

Sym	Attachment Type
D	Bead Chain, Cres., Passivate
F	Wire Rope, Nylon Jacket
G	Nylon Rope
H	Wire Rope, Teflon Jacket
N	No Attachment
R	Wire Rope, PVC Jacket
S	#8 Sash Chain, Cres., Passivate
T	Wire Rope, No Jacket
U	Wire Rope, Polyurethane Jacket with Terminal

TABLE IV: EYELET

Dash No.	K DIA
01	.140 (3.6)
02	.182 (4.6)
03	.191 (4.9)
04	.197 (5.0)
05	.167 (4.2)
06	.125 (3.2)
07	.218 (5.5)
09	.156 (4.0)
00	No Eyelet






TABLE V: SPLIT RING STYLE C

Dash No.	L Dia. ±.015 (0.4)	Dash No.	L Dia. ±.015 (0.4)
50	.425 (10.8)	74	1.625 (41.3)
52	.485 (12.3)	76	1.750 (44.5)
54	.640 (16.3)	78	1.875 (47.6)
56	.750 (19.1)	80	1.980 (50.3)
58	.890 (22.6)	82	2.060 (52.3)
60	1.015 (25.8)	84	2.235 (56.8)
62	1.095 (27.8)	86	2.310 (58.7)
64	1.130 (28.7)	88	2.475 (62.9)
66	1.250 (31.8)	90	2.655 (67.4)
68	1.350 (34.3)	92	2.810 (71.4)
70	1.390 (35.3)	94	3.045 (77.3)
72	1.485 (37.7)		

TABLE VI: SOLID RING STYLE B

Dash No.	M Dia. ±.015 (0.4)	Dash No.	M Dia. ±.015 (0.4)
08	.468 (11.9)	24	1.484 (37.7)
10	.593 (15.1)	25	1.577 (40.1)
12	.718 (18.2)	27	1.640 (41.7)
13	.765 (19.4)	28	1.687 (42.8)
14	.844 (21.4)	29	1.765 (44.8)
15	.890 (22.6)	30	1.890 (48.0)
16	.968 (24.6)	31	1.953 (49.6)
17	1.015 (25.8)	32	1.968 (50.0)
18	1.093 (27.8)	33	2.077 (52.8)
19	1.140 (29.0)	35	2.140 (54.4)
20	1.203 (30.6)	36	2.187 (55.5)
21	1.265 (32.1)	40	2.406 (61.1)
22	1.343 (34.1)	44	2.656 (67.5)
23	1.453 (36.9)	48	3.031 (77.0)
		118	.310 (7.9)

TABLE VII: SOLID RING STYLE A

Dash No.	N Dia. ±.015 (0.4)	Dash No.	N Dia. ±.015 (0.4)
095	.312 (7.9)	109	1.266 (32.2)
100	.391 (9.9)	209	1.312 (33.3)
101	.516 (13.1)	110	1.391 (35.3)
102	.583 (14.8)	210	1.438 (36.5)
103	.641 (16.3)	111	1.521 (38.6)
104	.708 (18.0)	211	1.536 (39.0)
105	.766 (19.5)	112	1.641 (41.7)
205	.788 (20.0)	113	1.766 (44.9)
106	.896 (22.2)	213	1.812 (46.0)
206	.907 (23.0)	114	1.891 (48.0)
107	1.016 (25.8)	214	1.938 (49.2)
207	1.025 (26.0)	115	2.078 (52.8)
108	1.141 (29.0)	116	2.406 (61.1)
308	1.188 (30.2)	117	2.510 (63.8)
208	1.203 (30.6)		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[660-022M16R6-01](#) [660-021NF20H7-05](#) [660-021NF22H7-05](#) [660-022G20H4-04](#) [660-022NF20H7-05](#) [660-022NF22H7-05](#) [660-021G20T6-04](#) [660-021C14S6-06](#) [660-021D12D8-70](#) [660-021M08N](#) [660-021M12N](#) [660-021M16R6-17](#) [660-021M18R5-18](#) [660-021M18S5-04](#) [660-021M20S6-06](#) [660-021M20S8-06](#) [660-021M22S6-06](#) [660-021N08S7-05](#) [660-021N12G7-10](#) [660-021N20G7-10](#) [660-022B14R6-04](#) [660-022C14N](#) [660-022C24G6-01](#) [660-022C28F5-01](#) [660-022M08H6-118](#) [660-022M08N](#) [660-022M10T3-104](#) [660-022M12H3-06](#) [660-022M12N](#) [660-022M12S5-06](#) [660-022M14N-98](#) [660-022M14S5-01](#) [660-022M18H6-01](#) [660-022M18H6-04](#) [660-022M18N](#) [660-022M20S7-06](#) [660-022M20S8-06](#) [660-022M22S7-06](#) [660-022M22S8-06](#) [660-022M24H6-01](#) [660-022M24N](#) [660-022M28N](#) [660-022N08S7-05](#) [660-022N12S7-05](#) [660-022N18S5-05](#) [660-022NF12N-98](#) [660-022NF14S5-01](#) [660-022NF16F5-02](#) [660-022NF18N](#) [660-022NF18S5-05](#) [660-022NF22S5-01](#) [660-022Z108H5-06-59](#) [660-022Z108S3-01](#) [660-022Z110H5-04](#) [660-022Z112H4-07-49](#) [660-022Z116N](#) [660-022Z120R5-06](#) [660-022Z122N-122](#) [660-021C12S5-01](#) [660-021M12S5-09](#) [660-021M14S5-02](#) [660-021M16S5-107](#) [660-021N12S7-05](#) [660-022C12S5-01](#) [660-022M10H2-01](#) [660-022M24H3-01](#) [660-022M16N-59](#) [660-022B08S3-06](#) [660-022B24H4-07](#) [660-022M16H5-108](#) [660-022M16N](#) [660-022M20S9.5-06](#) [660-022Z118N](#) [660-022Z116H5-095](#) [660-022M14F6-58](#) [660-022Z120S5-06](#) [660-022M22N](#) [660-022M10H3-12](#) [660-022N14S7-05](#) [660-021N14S7-05](#) [660-022NF16F5-03](#)