

SOLDER TAIL



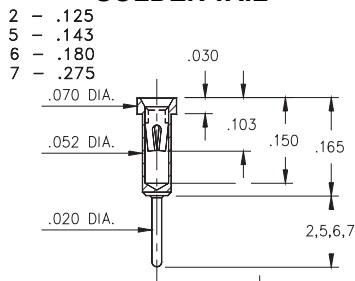


Fig. 1

Terminal Style 2,5,6,7



- Allows for maximum air circulation under the ICs.
- Sockets are XY stack-able.
- Socket pins feature closed-end construction eliminating any solder wicking problems.
- Direct visibility for soldering, inspection and repair.

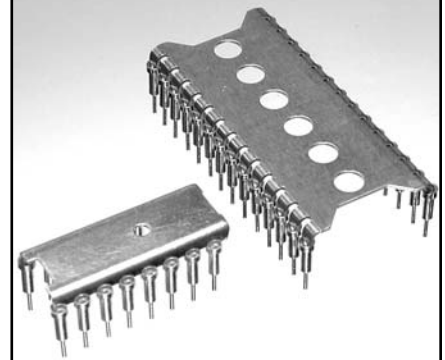

LOW PROFILE


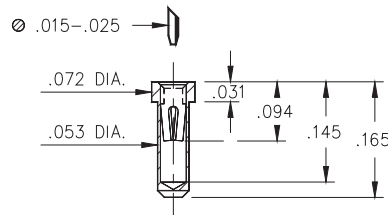


Fig. 2

Terminal Style 4



ULTRA LOW PROFILE


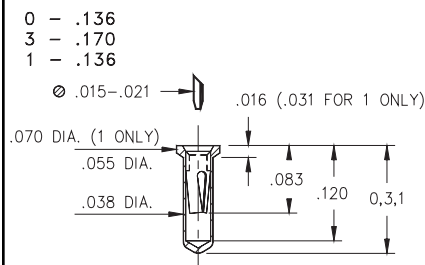


Fig. 3

Terminal Style 0,3,1



REDUCED BARRELL



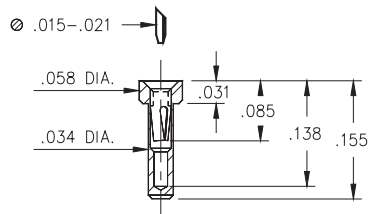


Fig. 4

Terminal Style 8



Total number of pins



Quantity per tube

	A	B	C	
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
24	1.2	0.4	0.5	16
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
40	2.0	0.6	0.7	10

Ordering Information

XX=Plating Code
See Below

RoHS
2002/95/EC

694-XX-306-00-67Y000
694-XX-308-00-67Y000
694-XX-314-00-67Y000
694-XX-316-00-67Y000
694-XX-318-00-67Y000
694-XX-320-00-67Y000
694-XX-322-00-67Y000
694-XX-324-00-67Y000

694-XX-424-00-67Y000

694-XX-624-00-67Y000
694-XX-628-00-67Y000
694-XX-632-00-67Y000
694-XX-640-00-67Y000

Socket Pin Information

	Terminal Length	Body Diameter	Fig. #
Y = 0	.136	.038	3
Y = 1	.136	.038	3
Y = 2	.125	.020	1
Y = 3	.170	.038	3
Y = 4	.165	.053	2
Y = 5	.143	.020	1
Y = 6	.180	.020	1
Y = 7	.275	.020	1
Y = 8	.155	.034	4

SPECIFY PLATING CODE XX=	93	99	43 ◇	44 ◇
Sleeve (Pin)	200µ" Sn/Pb	200µ" Sn/Pb	200µ" Sn	200µ" Sn
Contact (Clip)	30µ" Au	200µ" Sn/Pb	30µ" Au	200µ" Sn