


Datasheet

4 way 3.81mm terminal block Plug

RS Stock number 790-0865



Dimensions: (mm)

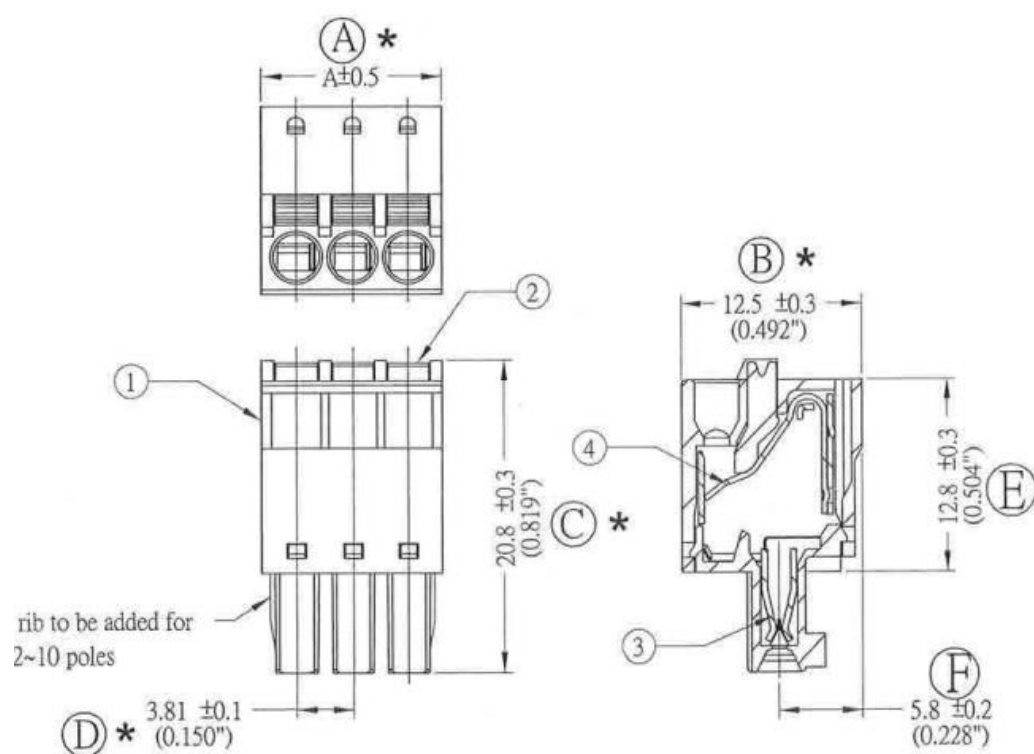



Specifications

- Current Rating: 8Amp AC300V
- Insulation withstands volts: AC2000V min
- Insulation resistance: > 2000 M Ω DC500V
- Operation Temperature: -40°C to +105°C
- Wire Strip Length: 9mm
- Wire Range: 16~28 AWG

Material

- Insulating Body: Polyamide 66 (UL94V-0)
- Lever: Polyamide 66 (UL94V-0)
- Contact: phosphor Bronze
- Spring: Stainless Strip Steel

Finish

- Contact: Tin Plated
- RoHS Compliant

Pitch: 3.81mm (0.150inch)					
Poles	A(mm)	A(in)	Poles	A(mm)	A(in)
2	8.42	0.331	15	57.95	2.281
3	12.23	0.481	16	61.76	2.431
4	16.04	0.631	17	65.57	2.581
5	19.85	0.781	18	69.38	2.731
6	23.66	0.931	19	73.19	2.881
7	27.47	1.081	20	77.00	3.031
8	31.28	1.231			
9	35.09	1.381			
10	38.90	1.531			
11	42.71	1.681			
12	46.52	1.831			
13	50.33	1.981			
14	54.14	2.131			