

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14	E1	CORRECTED ARROWHEADS	09JUN03	JR TM

<b>AMP WIRE RANGE</b>	FILE E66717	LR7189 Certified
22-18 AWG STRANDED	22-18 AWG STRANDED	22-18 AWG STRANDED

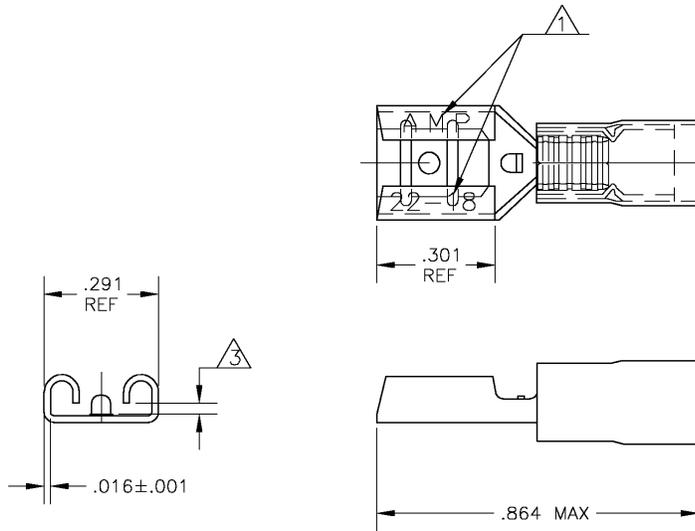

- 1 MARKED AMP 22-18
- 2 DESIGNED FOR WIRE INSULATION DIA OF .090-.125.
- 3 MATES WITH .250±.003 BY .032±.001 THK TAB.
- 4 BODY: BRASS, TIN PLATED SLEEVE: VINYL, RED
- 5 RATED FOR 10 MAX AMPERE

100	LOOSE PIECE	8-696301-1
4000	ON TAPE	696301-2
1000	LOOSE PIECE	696301-1
QTY	PACKAGE TYPE	PART NO.

TYCO ELECTRONICS CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 75°C [167°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 15MAR01	Tyco Electronics Corporation Harrisburg, PA. 17057
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWING AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 300V MAX	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .008 4 PLC ± - ANGLES ± -	CHK MS FEHER 15MAR01	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 509-1,900 STRANDED		MATERIAL	APVD T MICHELUTTI 15MAR01	RECEPTACLE, 250 SERIES, FASTON, BUDGET, PRE-INSULATED, WIRE:22-18 AWG
FOR ORDER ENTRY	1-800-526-5142			FINISH	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
AMP 1470-19 REV 31MAR2000					WEIGHT	A3 00779 C-696301
14MAR01 9:17am amp13469 H:\dmtecm\696301_1-c.dwg					CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV E1