

Quiet Line High Performance Filter Products

Subminiature D Connectors with Capacitive Filters 9 Position (Continued)

Material and Finish:

Shell—Steel, tin plated

Insert—Thermoplastic, UL rated 94V0

Contact—One piece phosphor bronze, plated .000015 [0.00038] min. gold in contact area

Filter Sleeve—Ceramic


Related Product Data:

Panel Mounting/Mating—
page 28

Accessories—pages 30-32

Electrical Specifications—
page 8

Plug-Receptacle Adapter

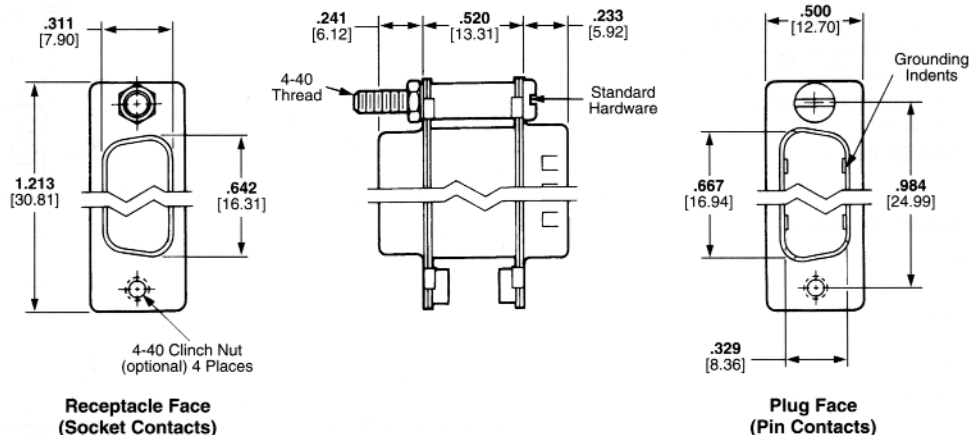

Connector Dimensions

Number of Positions (Shell Size)	Connector Config.	L Max. (Straight pins)		W Max. (Right Angle)	D Max. (Solder Cup)	
		CC & CE Types	CA, CF & CD Types	All Types	CC & CE Types	CA, CF & CD Types
9 (1)	Plug	.640	.785	1.015	.680	.825
		16.26	19.94	25.78	17.27	20.96
	Receptacle	.645	.790	1.020	.685	.830
		16.38	20.07	25.91	17.40	21.08

Part Numbers

Filter Type	Mounting Style	Plug Assemblies with Pin Contacts			Receptacle Assemblies with Socket Contacts			Plug-Receptacle Adapters
		Termination Type			Termination Type			
		Right-Angle Posted .040 [1.02] Dia.	Straight Posted .040 [1.02] Dia.	Solder Cup	Right-Angle Posted .040 [1.02] Dia.	Straight Posted .040 [1.02] Dia.	Solder Cup	
CA	.122 [3.10] Dia. Mounting Hole	842946-1	842938-1	93768-1	842950-1	842942-1	93772-1	842954-1
	4-40 Clinch Nut	842946-2	842938-2	93768-6	842950-2	842942-2	93772-6	842954-2
CC	.122 [3.10] Dia. Mounting Hole	842674-3	842666-3	93768-2	842678-3	842670-3	93772-2	842737-3
	4-40 Clinch Nut	842674-4	842666-4	93768-7	842678-4	842670-4	93772-7	842737-4
CD	.122 [3.10] Dia. Mounting Hole	842646-3	842638-3	93768-3	842650-3	842642-3	93772-3	842697-3
	4-40 Clinch Nut	842646-4	842638-4	93768-8	842650-4	842642-4	93772-8	842697-4
CE	.122 [3.10] Dia. Mounting Hole	842618-3	842610-3	93768-4	842622-3	842614-3	93772-4	842739-3
	4-40 Clinch Nut	842618-4	842610-4	93768-9	842622-4	842614-4	93772-9	842739-4
CF	.122 [3.10] Dia. Mounting Hole	842590-3	842582-3	93768-5	842594-3	842586-3	93772-5	842738-3
	4-40 Clinch Nut	842590-4	842582-4	1-93768-0	842594-4	842586-4	1-93772-0	842738-4