

INTERCONNECTS

SERIES 850, 851, 852, 853 • .050" GRID HEADERS AND SOCKETS • SINGLE AND DOUBLE ROW STRIPS

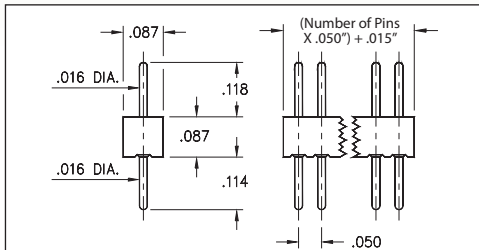


FIG. 1

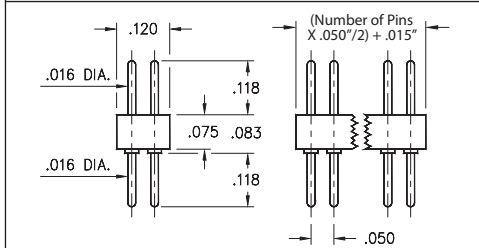


FIG. 2

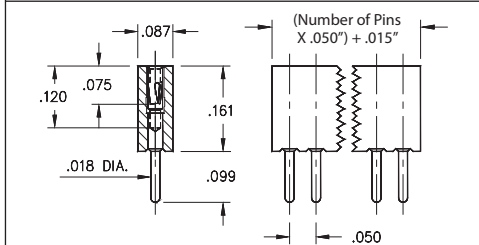


FIG. 3

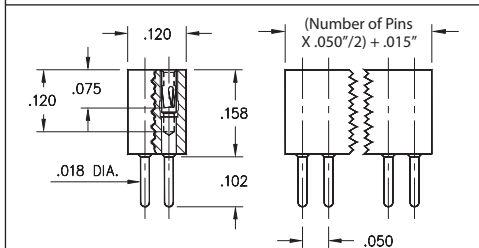


FIG. 4


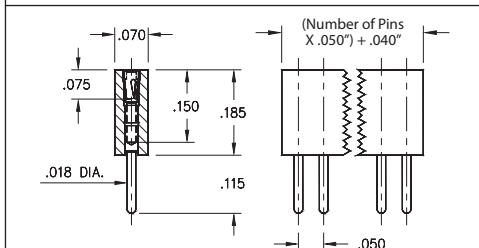


FIG. 5

- Series 850, 851, 852, 853 single and double row interconnects have .050" pin spacing and permit board stacking as low as .248"
- Pin headers have .016" dia. pins (MM #4006-0) See page 208 for details
- MM #0467 and MM #4890 receptacles use Hi-Rel, 3-finger BeCu #11 contact rated at 3 amps. (#11 contact accepts pin diameters from .015"-.020"). See pages 158 and 160 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

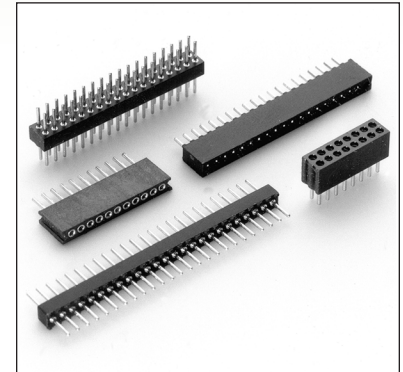

ORDERING INFORMATION

FIG. 1	Series 850...001 Single Row .087" Profile Pin Header				
	850-XX-0 -10-001000 Specify number of pins 01-50				
FIG. 2	Series 852...001 Double Row .083" Profile Pin Header				
	852-XX- -10-001000 Specify number of pins 004-100				
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264					
SPECIFY PLATING CODE XX=		10	90	40	
Pin Plating 		10 μ" Au	200 μ" Sn/Pb	200 μ" Sn	

FIG. 3	Series 851...001 Single Row .161" Profile Socket							
	851-XX-0 -10-001000 Specify number of pins 01-50							
FIG. 4	Series 853...001 Double Row .161" Profile Socket							
	853-XX- -10-001000 Specify number of pins 004-100							
FIG. 5	Series 851...002 Single Row .185" Profile Socket							
	851-XX-0 -10-002000 Specify number of pins 01-77							
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264								
SPECIFY PLATING CODE XX=			91	93	99	41	43	
Sleeve (Pin) 			200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn	
Contact (Clip) 			10 μ" Au	30 μ" Au	100 μ" Sn/Pb	10 μ" Au	30 μ" Au	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[853-99-100-10-001000](#) [853-99-050-10-001000](#) [853-93-050-10-001000](#) [852-90-100-10-001000](#) [852-90-050-10-001000](#) [851-99-077-10-002000](#) [851-99-050-10-001000](#) [851-99-025-10-001000](#) [851-93-077-10-002000](#) [851-93-025-10-001000](#) [850-90-050-10-001000](#) [850-90-025-10-001000](#) [850-10-050-10-001000](#) [850-10-006-10-001000](#) [850-10-007-10-001000](#) [851-93-013-10-001000](#) [853-99-016-10-001000](#) [853-43-100-10-001000](#) [851-93-050-10-001000](#) [851-93-004-10-002000](#) [853-93-020-10-001000](#) [852-90-020-10-001000](#) [853-93-012-10-001000](#) [853-93-018-10-001000](#) [851-93-003-10-002000](#) [851-93-008-10-002000](#) [850-10-010-10-001000](#) [851-93-006-10-001000](#) [851-93-007-10-001000](#) [852-10-100-10-001000](#) [852-10-020-10-001000](#) [851-93-003-10-001000](#) [853-13-100-10-001000](#) [853-93-100-10-001000](#) [853-43-050-10-001000](#) [852-40-100-10-001000](#) [852-40-050-10-001000](#) [851-43-077-10-002000](#) [851-43-025-10-001000](#) [850-40-050-10-001000](#) [850-40-025-10-001000](#) [850-10-025-10-001000](#) [852-10-016-10-001000](#) [851-43-050-10-001000](#) [850-10-003-10-001000](#) [850-40-012-10-001000](#) [851-43-008-10-002000](#) [851-43-012-10-002000](#) [853-93-068-10-001000](#) [850-10-002-10-001000](#) [850-10-004-10-001000](#) [851-43-002-10-001000](#) [852-10-006-10-001000](#) [853-43-014-10-001000](#) [853-93-014-10-001000](#) [850-40-006-10-001000](#) [851-43-008-10-001000](#) [853-93-010-10-001000](#) [851-43-004-10-001000](#)