

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [87263-2003](#)
Status: **Active**
Overview: [Milli-Grid™ Connector System](#)
Description: 2.00mm Pitch Milli-Grid™ Receptacle, Surface Mount, Bottom Entry, 0.38µm Gold (Au) Selective, 20 Circuits, with Pick-and-Place Cap, Tube, Lead-Free

Documents:

3D Model	RoHS Certificate of Compliance (PDF)
Drawing (PDF)	Product Literature (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Receptacles
Series	87263
Application	Board-to-Board, Signal
Overview	Milli-Grid™ Connector System
Product Literature Order No	987650-1991
Product Name	Milli-Grid™
UPC	822348479214

Physical

Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.442/g
Number of Rows	2
Orientation	Bottom Entry
PCB Locator	Yes
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.381µm
Polarized to Mating Part	No
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	125V

Solder Process Data

Duration at Max. Process Temperature (seconds)	14
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1

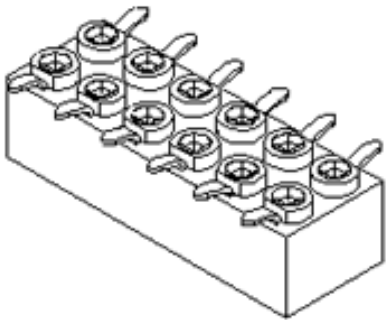


image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[87263Series](#)

Mates With

87759 Vertical, Surface Mount, Stackable
PCB Headers, 87760 Right Angle, Through
Hole, Stackable PCB Headers, 87758
Vertical, Through Hole, Stackable PCB
Headers

Process Temperature max. C	265
Material Info	
Reference - Drawing Numbers	
Sales Drawing	SD-87263-**2*

This document was generated on 05/14/2015
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[87263-2003](#)