





Sprung Hook

Part Number:- 121026
Standard Colours. Red Black
Features Accepts all standard 4mm plugs

IEC 61010 Rating.
Measurement Category. 1000V CAT III/600V CAT IV
Current Rating. 20 Amp
Insulation Category. Double/Reinforced.
Pollution Degree. Two (2)

Silvertronic confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:


IEC61010-031:2002 (First Edition) + Amd. 1:2008.

Together with the corresponding UL and CSA Standards, and are subject of a CB Scheme report.
All products marked as per IEC requirements. UL and CSA marking upon request.

All testing carried out by independent third party test house and CB Test Laboratory,

MET Laboratories Inc. Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive and where applicable comply with HSE GS.38.

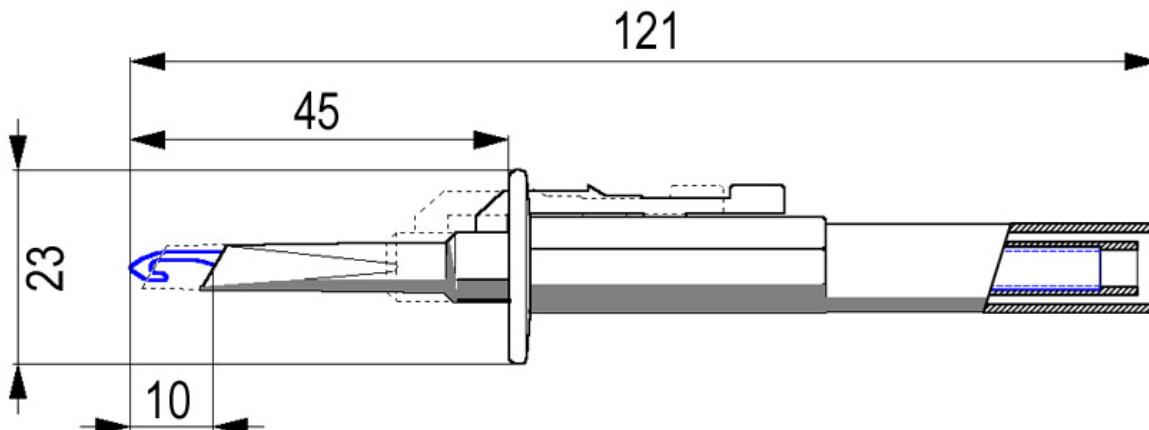



Lantern Prod

Part Number:- 121348
Standard Colours. Red Black
Features Accepts all standard 4mm plugs

IEC 61010 Rating.
Measurement Category. 1000V CAT III
Current Rating. 20 Amp
Insulation Category. Double/Reinforced.
Pollution Degree. Two (2)

Silvertronic confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:


IEC61010-031:2002 (First Edition) + Amd. 1:2008.

Together with the corresponding UL and CSA Standards, and are subject of a CB Scheme report.
All products marked as per IEC requirements. UL and CSA marking upon request.

All testing carried out by independent third party test house and CB Test Laboratory,

MET Laboratories Inc. Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive and where applicable comply with HSE GS.38.

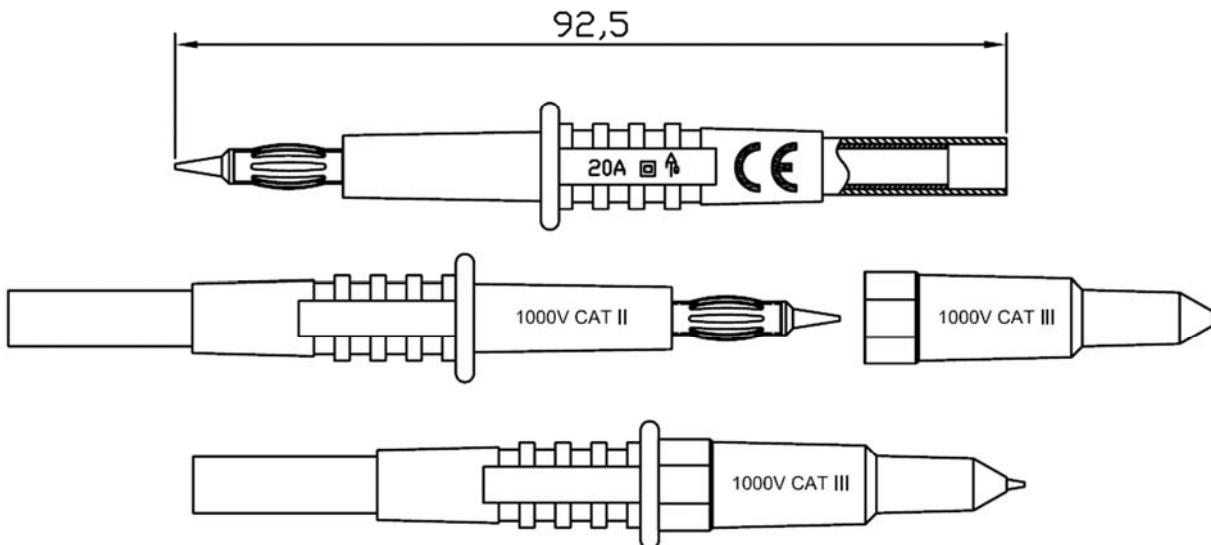

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----

SILVERTRONIC
LTD

Title:
OEM Lantern Prod

Rev	Details		Date	Drawn
4				
3				
2				
1	Production issue		06/07/09	CS
A	Pre-Production issue		02/07/09	CS


Part No:
121348

This drawing is not to be disclosed to a third party without the written authority from the company ©


Project No:

COLOUR AS REQUIRED


Cap 113386




4mm Lantern 108008/N

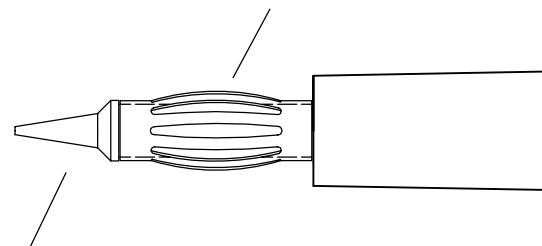

Body 113362

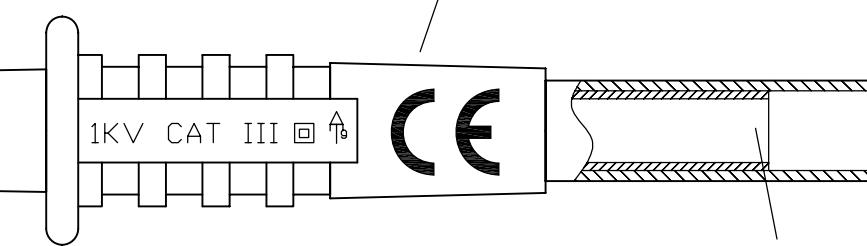

Contact 103216/N

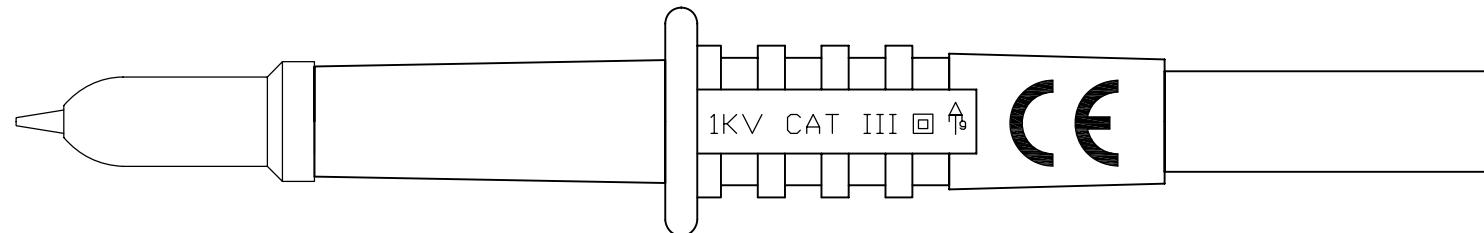

Assembly Jig Numbers

#####=J##

#####=J##

#####=J##

#####=J##

Printing as illustrated

Packaging:

Tolerances:
Cable Lengths +/- 05%

Do Not Scale All Dimensions In
MM



4mm - 4mm Coupler

Part Number:- 125099
Standard Colours. Red Black
Features Accepts all standard 4mm Plugs

IEC 61010 Rating.
Measurement Category. 1000V CAT III/600V CAT IV
Current Rating. 20 Amp
Insulation Category. Double/Reinforced.
Pollution Degree. Two (2)

Silvertronic confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:


IEC61010-031:2002 (First Edition) + Amd. 1:2008.

Together with the corresponding UL and CSA Standards, and are subject of a CB Scheme report.
All products marked as per IEC requirements. UL and CSA marking upon request.

All testing carried out by independent third party test house and CB Test Laboratory,

MET Laboratories Inc. Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive and where applicable comply with HSE GS.38.

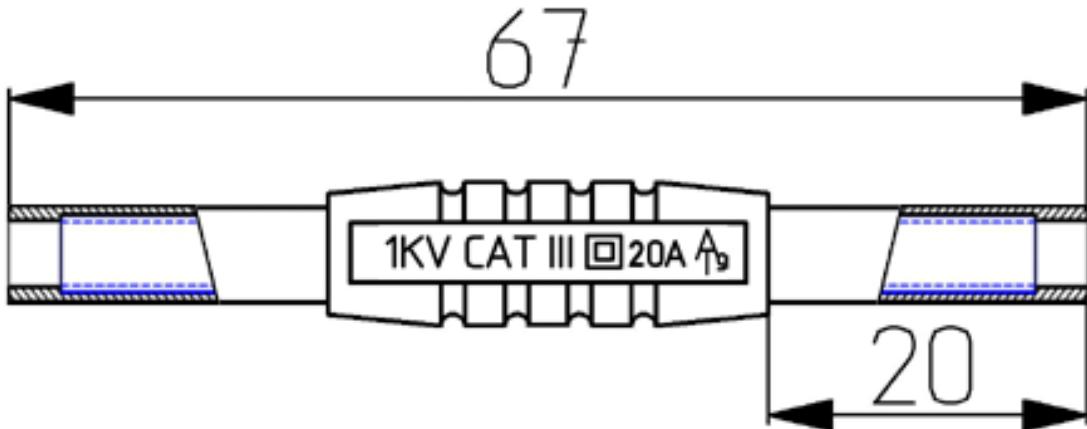



1000 Volt Fully Insulated Crocodile Clip

Part Number:-

126024

Standard Colours.

Red Black Green Yellow Blue White Brown Grey

Features

Accepts all standard 4mm plugs

IEC 61010 Rating.

Measurement Category. 1000V CAT III/600V CAT IV

Current Rating. 30 Amp

Insulation Category. Double/Reinforced.

Pollution Degree. Two (2)

Silvertronic confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:


IEC61010-031:2002 (First Edition) + Amd. 1:2008.

Together with the corresponding UL and CSA Standards, and are subject of a CB Scheme report. All products marked as per IEC requirements. UL and CSA marking upon request.

All testing carried out by independent third party test house and CB Test Laboratory,

MET Laboratories Inc. Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive and where applicable comply with HSE GS.38.

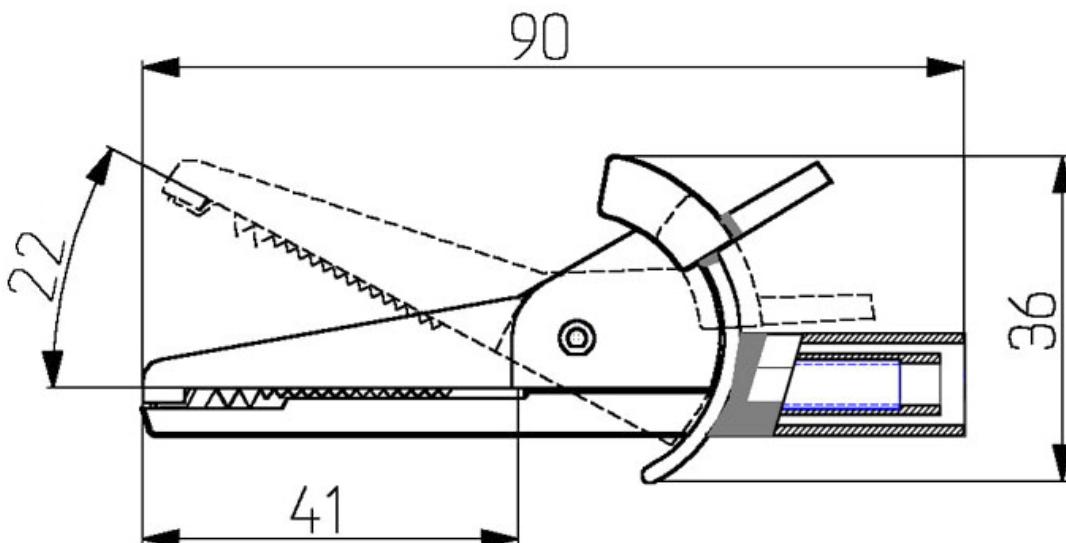

SILVERTRONIC LTD

This drawing is not to be disclosed to a third party without the written authority from the company ©

Material: N/A

Pre-Production issue

20/01/09 CS

1 2 3 4 5 6 7 8 9 10 11 12

Rev

4

3

2

1

First issue

20/01/09 CS

Part No: 126111

A


Project No:

124166 RA Assembly

111032 Spring


122071 Jaw Assembly

B

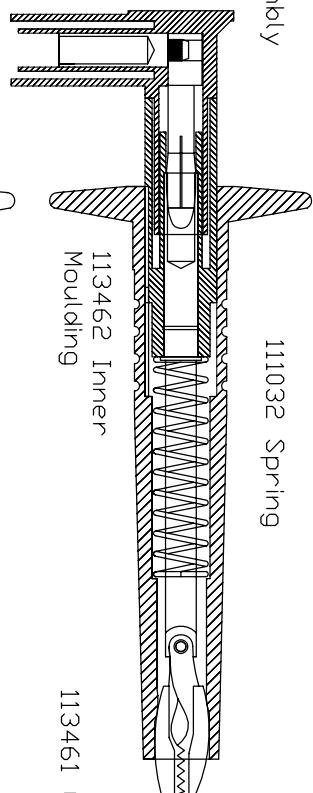

113461 Grabber Body Moulding

C

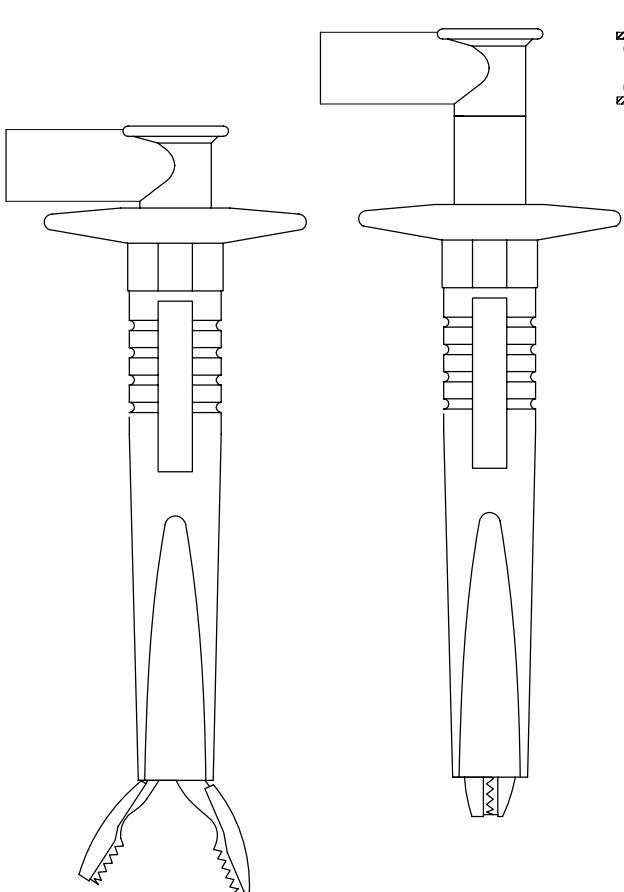

Assembly Jig Numbers	Printing as illustrated	Tolerances: Cable Lengths +/− 05%	Do Not Scale All Dimensions In MM
# #####=J# #	# #####=J# #		
# #####=J# #	Packaging:		

SILVERTRONIC
LTD.

Date 24/01/02 Drn.By Steve \$

This drawing is not to be disclosed to a third party without the authority from the company.©

Title OEM FS TO FS LEAD ON SILICONE


IEC 1010 COMPLIANT RATING:
1000 VOLTS CAT III 20 AMPS POL DEG. 2

ISSUE No.


1
24/01/02
PROD ISSUE

Part No.
123680/OF

PROJECT No.1558

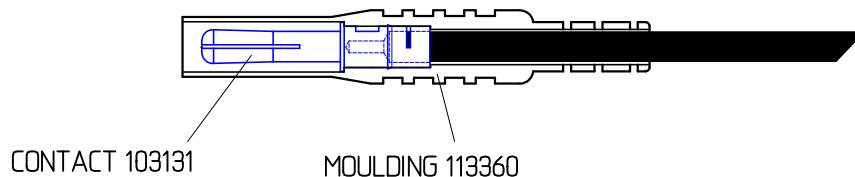

125070 OEM PLUG

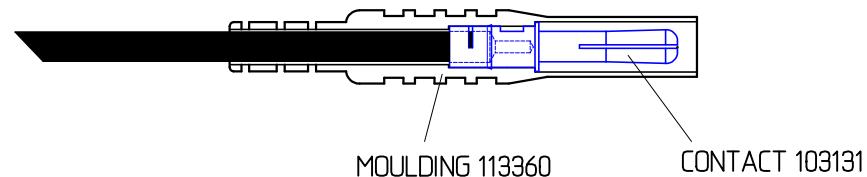

119054 CUT 1.250 Metres or (102523)

125070 OEM PLUG

DOUBLE SKIN SILICONE CABLE



ASSEMBLY JIG NUMBERS
125070-J163 or 167 + 166

PACKAGING Bulk
LABEL: -----

NO PRINTING

TOLERANCES
CABLE LENGTHS +/- 5%

DO NOT SCALE.
ALL DIMENSIONS IN mm.

DECLARATION OF CONFORMITY

SILVERTRONIC Ltd. confirm that the products listed below have been Designed, Manufactured and Tested to, and therefore are fully compliant to;
IEC1010-1 1990 inc. Amendment 2-1995 &
IEC1010-2-031 First Edition-1993
and thus meet THE LOW VOLTAGE DIRECTIVE (LVD)
73/23/EEC and amending directive 93/68/EEC

PRODUCT TYPE / DESCRIPTION		4mm Safety Plug to Right Angle Plug Lead Kit			
PART No.		129301			
IEC1010 RATING	VOLTAGE	1000	Volts	INSULATION CATEGORY	III (3)

MAXIMUM RATED CURRENT	20	Amps
POLLUTION DEGREE	2	
INSULATION CATEGORY	DOUBLE/REINFORCED	

INCLUDES FOLLOWING ASSEMBLIES / COMPONENTS SUBJECT TO INDIVIDUAL TEST.	DESCRIPTION	PART No.
	4mm right angle plug	125076
	4mm safety plug	125070
	Double Skin Silicone cable	
	1mm Sq.	119054



All Testing carried out by Third Party Testhouse
CRANAGE EMC TESTING Ltd.
(LVD TESTING DEPARTMENT)



www.silvertronic.com
e-mail: sales@silvertronic.com


Registration No. 1993292

North American Office
4405 Sharon Copley Road,
Medina, Ohio, 44256.
Toll Free: (866) 556 3308
Facsimile: (330) 722 2281

125070 OEM PLUG



1No. RED & BLACK 123301 FS-RA LEAD

125076 OEM RA PLUG

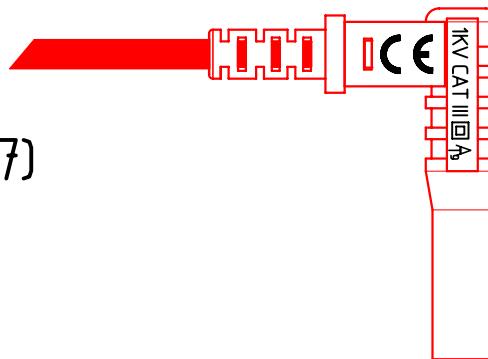

119054 CUT 1.250Metre (102517)

DOUBLE SKIN SILICONE CABLE

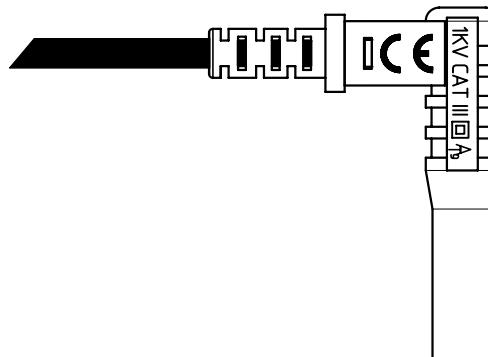

ASSEMBLY JIG NUMBERS
125070=J163 or 167 + 166

PACKAGING
POLY BAG: (111503)

TOI FRANCES

CABLE LENGTHS +/- 5%

DO NOT SCALE.
ALL DIMENSIONS IN mm.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Adaptive Interconnect Electronics:](#)

[905330](#)