

SMD KHz Crystals 2.0 x 1.2 x 0.6 mm 9H T11 Series

Quartz Crystals
Series

Features

- Ceramic surface mount package
- Applications in mobile phone, Notebook and DSC.
- RoHS Compliant / Pb Free.



Electrical Specifications


Item / Type	9H T11
Normal Frequency	32.768 KHz
Frequency Tolerance(at 25 °C)	± 20 ppm , or specify
Operation Temperature Range	- 40 ~ + 85 °C
Shunt Capacitance (C0)	1.3pF typical
Motional Capacitance (C1)	6.4fF typical
Insulation Resistance (IR)	500 MΩ Min.
Drive Level (DL)	1.0 μW Max.
Load Capacitance(CL)	9 pF , or 12.5 pF
Turnover Temperature (Ti)	25 °C ± 5 °C
Parabolic Coefficient (B)	(-0.03 ± 0.01) * 10 ⁻⁶ / °C ²
Aging (at 25 °C)	± 5 ppm at first year
Storage Temperature Range	- 55 ~ +125 °C

Equivalent Series Resistance(ESR)


T11

90 KΩ Max


Dimensions

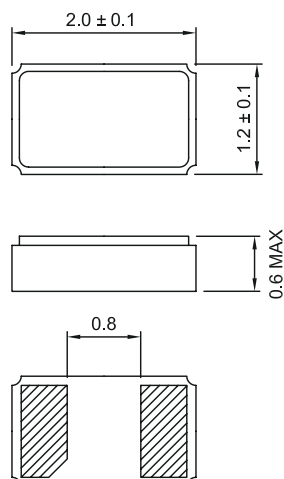

Connection



Suggested Layout



Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TXC Corporation:](#)

[9HT11-32.768KAZF-T](#) [9HT11-32.768KEZF-T](#) [9HT11-32.768KDZC-T](#) [9HT11-32.768KDZF-T](#) [9HT11-32.768KEZC-T](#)
[9HT11-32.768KAZC-T](#) [9HT11-32.768KBZY-T](#) [9HT11-32.768KDZB-T](#) [9HT11-32.768KBZC-T](#) [9HT11-32.768KDZY-T](#)
[9HT11-32.768KDZA-T](#) [9HT11-32.768KBZA-T](#) [9HT11-32.768KAZY-T](#) [9HT11-32.768KAZB-T](#) [9HT11-32.768KBZB-T](#)
[9HT11-32.768KAZA-T](#) [9HT11-32.768KBZF-T](#)