

**Ordering number C11192_TUIJA-3-SS**

Family	Tuija	FWHM	10 degrees
Type	Lens array	Efficiency	93 %
LED	Z5	cd/lm	22.000
Color	Clear	Gerber File	Available
Diameter	50 mm		
Height	14.5 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	-		
Fastening	Pin, glue		
Status	Ready		

MR16 Applications

**Ordering number C11193_TUIJA-3-M**

Family	Tuija	FWHM	12 degrees
Type	Lens array	Efficiency	93 %
LED	Z5	cd/lm	11.000
Color	Clear	Gerber File	Available
Diameter	50 mm		
Height	14.5 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	-		
Fastening	Pin, glue		
Status	Ready		

MR16 Applications

**Ordering number C12150_TUIJA-3-M2**

Family	Tuija	FWHM	32 degrees
Type	Lens array	Efficiency	92 %
LED	Z5	cd/lm	2.500
Color	Clear	Gerber File	Available
Diameter	50 mm		
Height	14.5 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	-		
Fastening	Pin, glue		
Status	Ready		

MR16 Applications

**Ordering number C11191_TUIJA-3-W**

Family	Tuija	FWHM	48 degrees
Type	Lens array	Efficiency	88 %
LED	Z5	cd/lm	1.400
Color	Clear	Gerber File	Available
Diameter	50 mm		
Height	14.5 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	-		
Fastening	Pin, glue		
Status	Ready		

MR16 Applications



PRODUCT DATASHEET
Tuija series
last update 6/6/2012



NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



PRODUCT DATASHEET

Tuija series

last update 6/6/2012



GENERAL INFORMATION


- Product series especially designed & optimized for Z5 series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.

Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94_Yellow%20Card.pdf

<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20PLEXIGLAS-Datasheet.pdf>

Relative Intensity of C11191_Tuija-3-W-DD

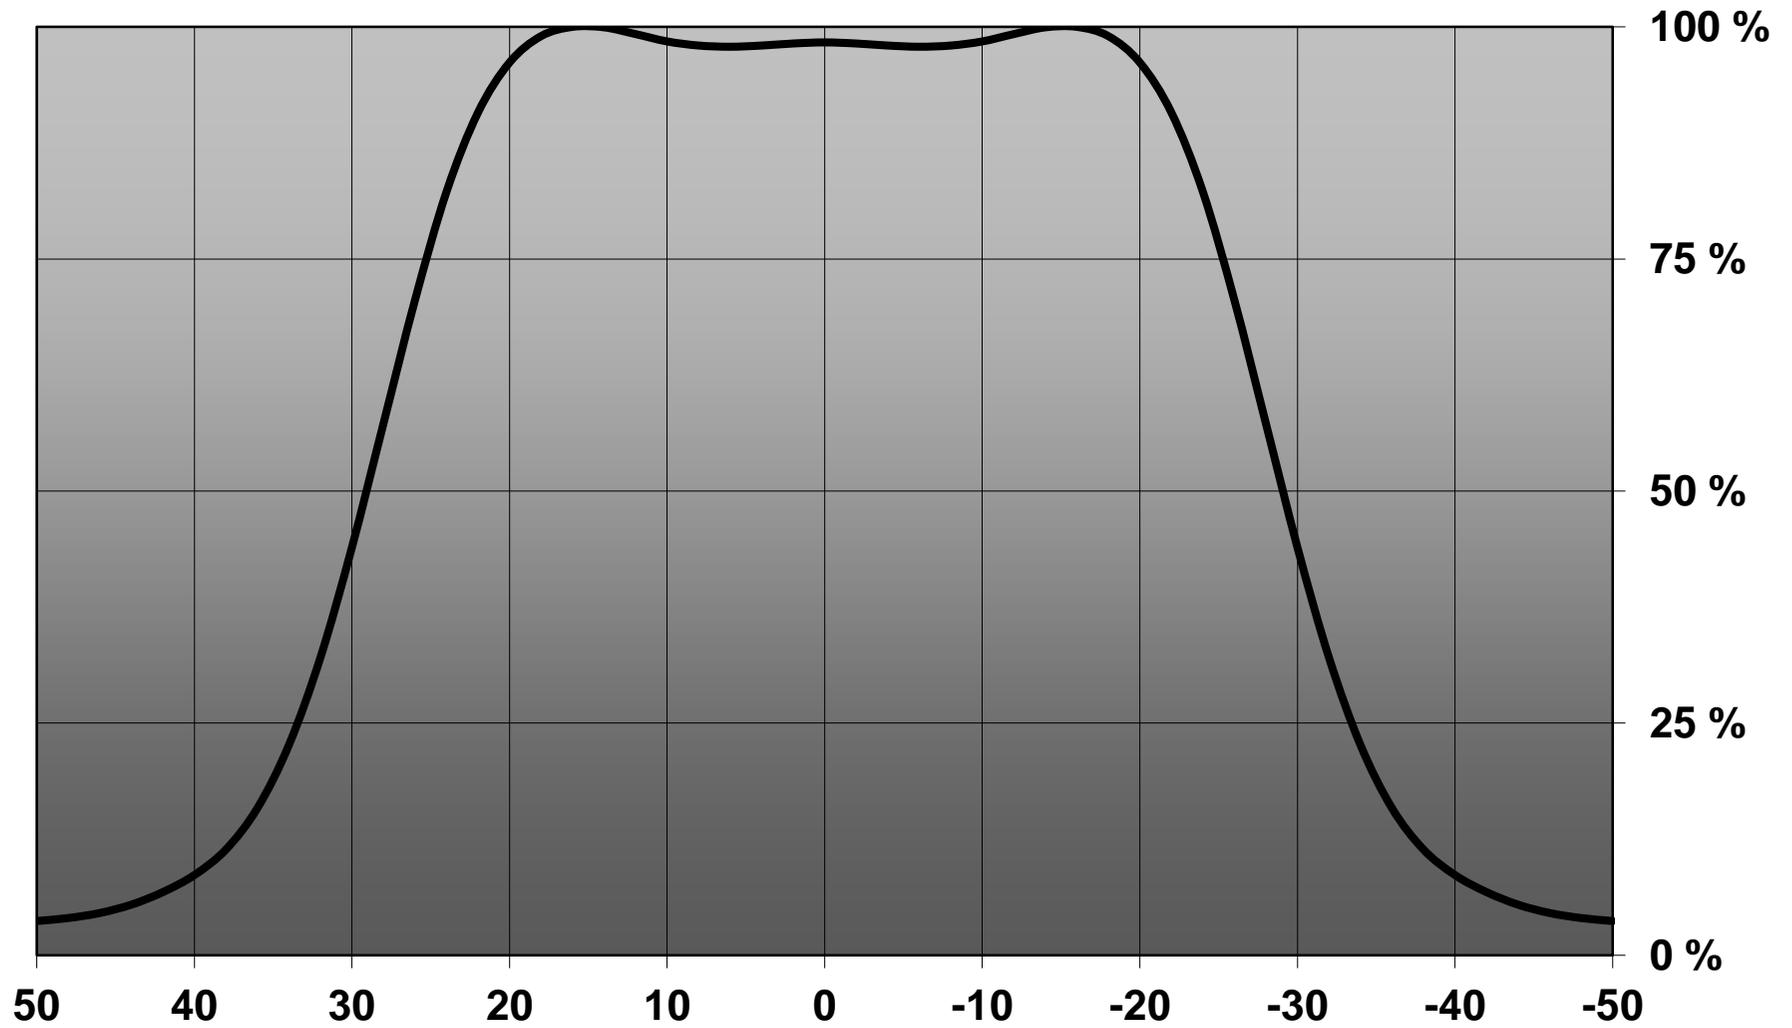

D

C

B

A

4

4

3

3


2

2


1

1

Bottom view

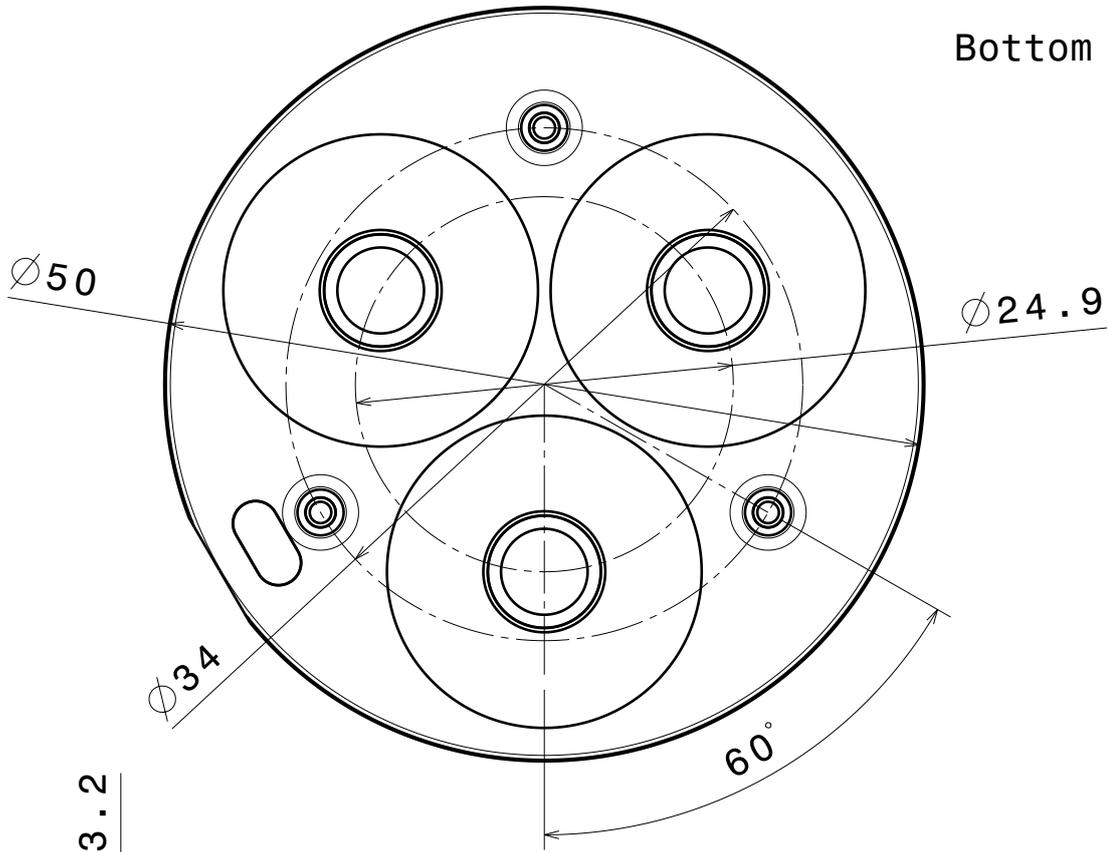

Front view

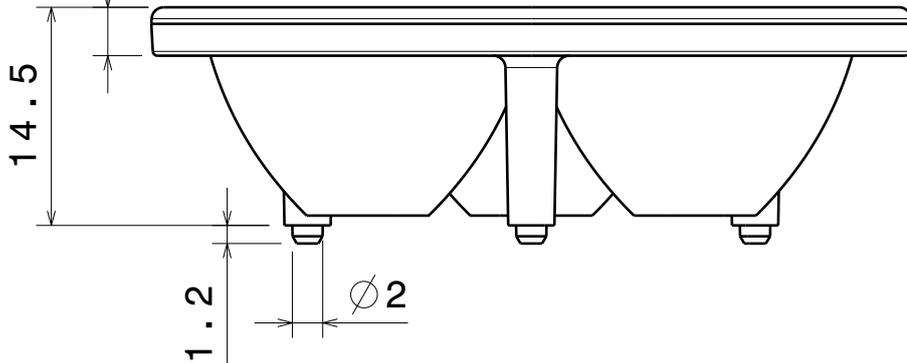

Material:
Lens PMMA

Part no.s:
C11191_Tuija-3-W
C11192_Tuija-3-SS
C11193_Tuija-3-M

Tolerances:
Dimensions less < 20mm +/-0.1mm
Dimensions between (21-45)mm +/-0.2mm
Dimensions between (46-90)mm +/-0.3mm

This drawing is our property.
It can't be reproduced
or communicated without
our written agreement.



L
T
F
F

e
e
i
i
N
n

d

h

DRAWING TITLE

Datasheet Tuija-3 lens

DRAWN BY

DATE

12.10.2009

CHECKED BY

DATE

09.10.2009

DESIGNED BY

HH

DATE

29.05.2007

SIZE

A4

DRAWING NUMBER

C11191-193

REV

1

SCALE

2:1

WEIGHT (g)


SHEET

1/1


D

A


Luminaire: Ledil Oy C11192_TUIJA-3-SS (Seoul Z5 223lm @ 250mA) Efficiency=93%
Lamps: 1 x Seoul Z5 223lm @ 250mA

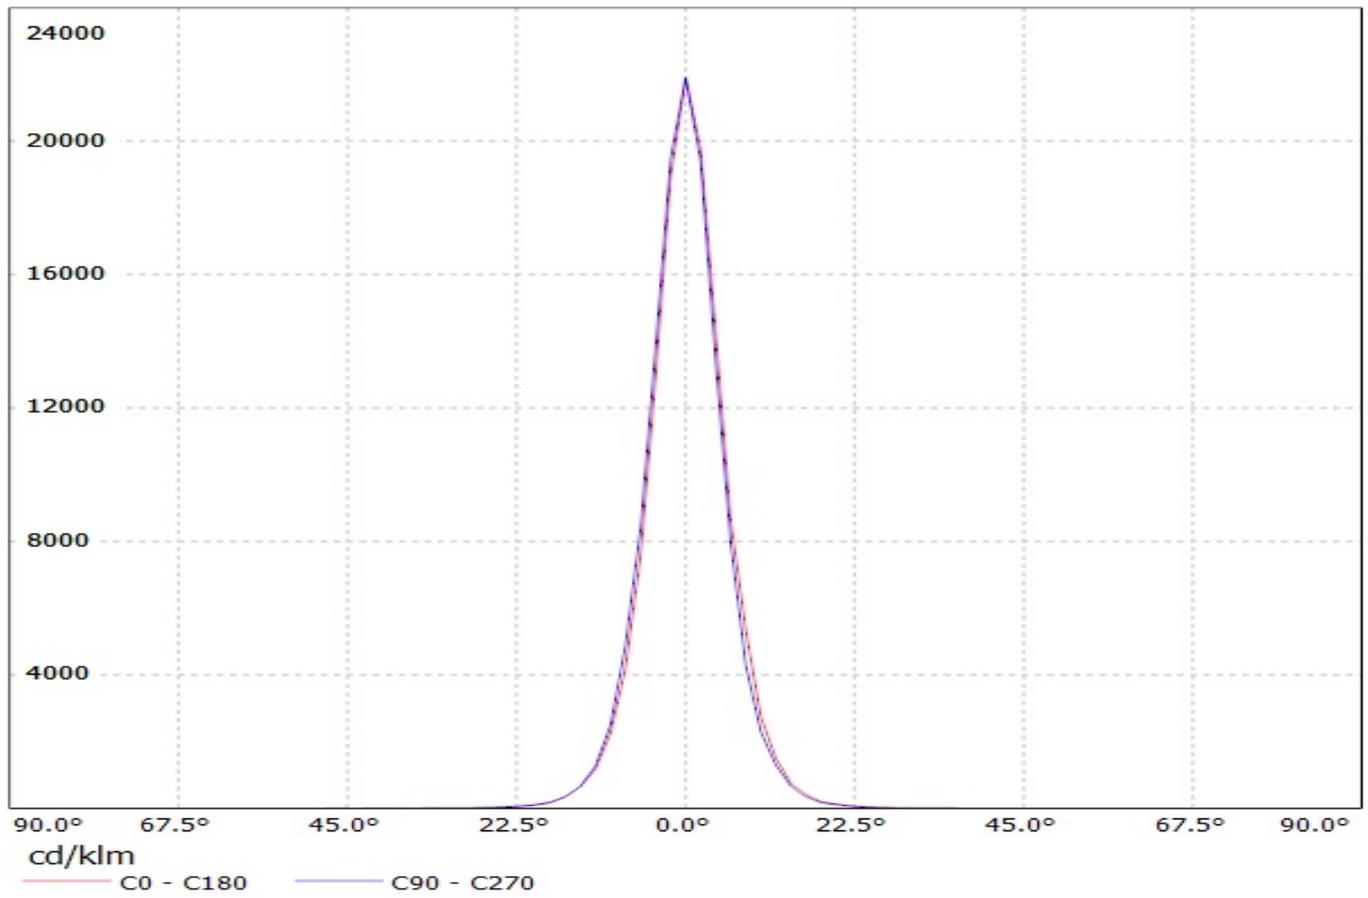


Luminaire: Ledil Oy C11193_TUJA-3-M (Seoul Z5 223lm @ 250mA) Efficiency=93%
Lamps: 1 x Seoul Z5 223lm @ 250mA

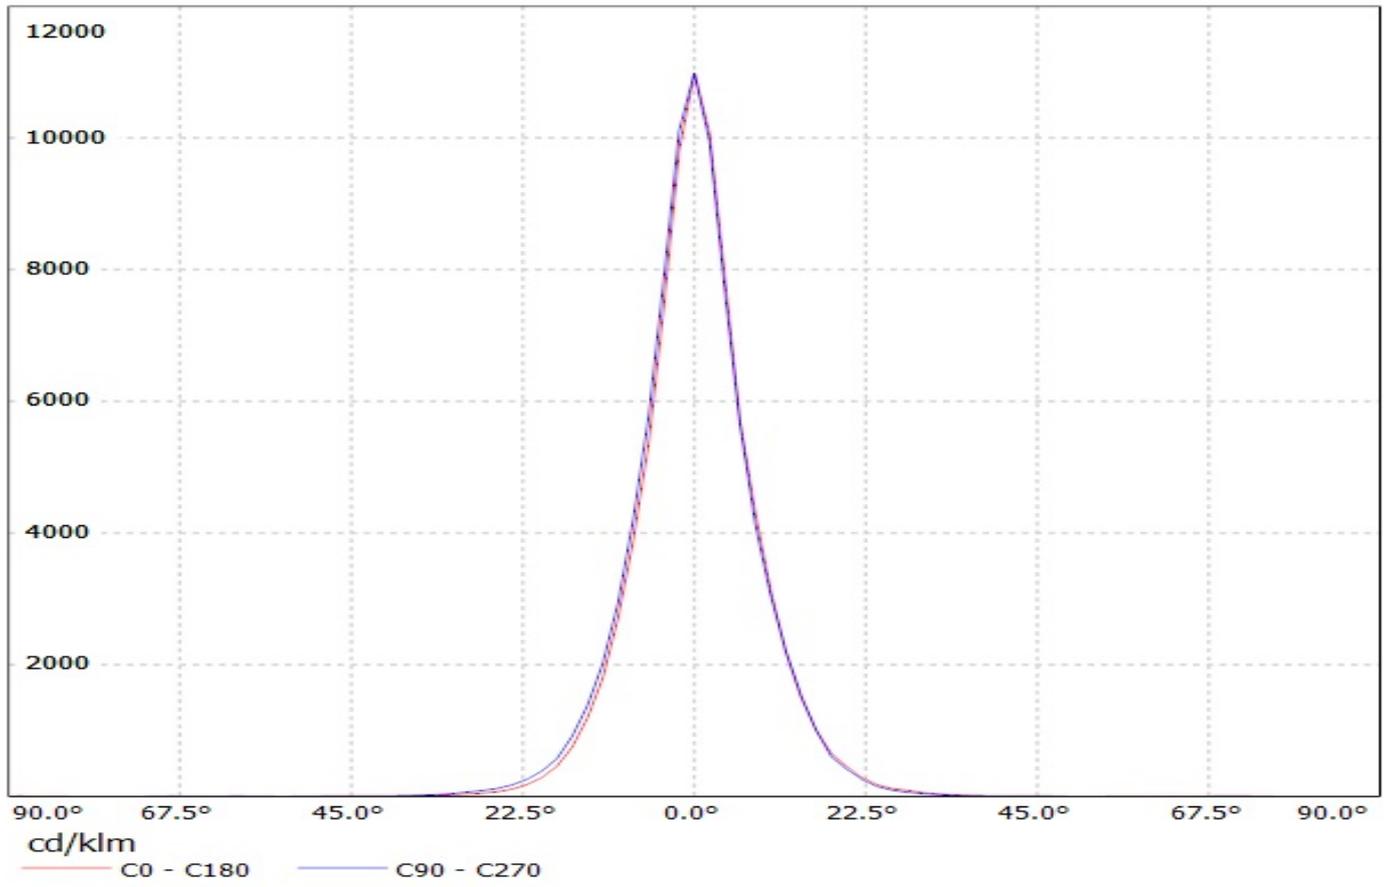


Luminaire: Ledil oy C12150_TUIJA-3-M2 (Seoul Z5 223lm @ 250mA) Efficiency=92%
Lamps: 1 x Seoul Z5 223lm @ 250mA

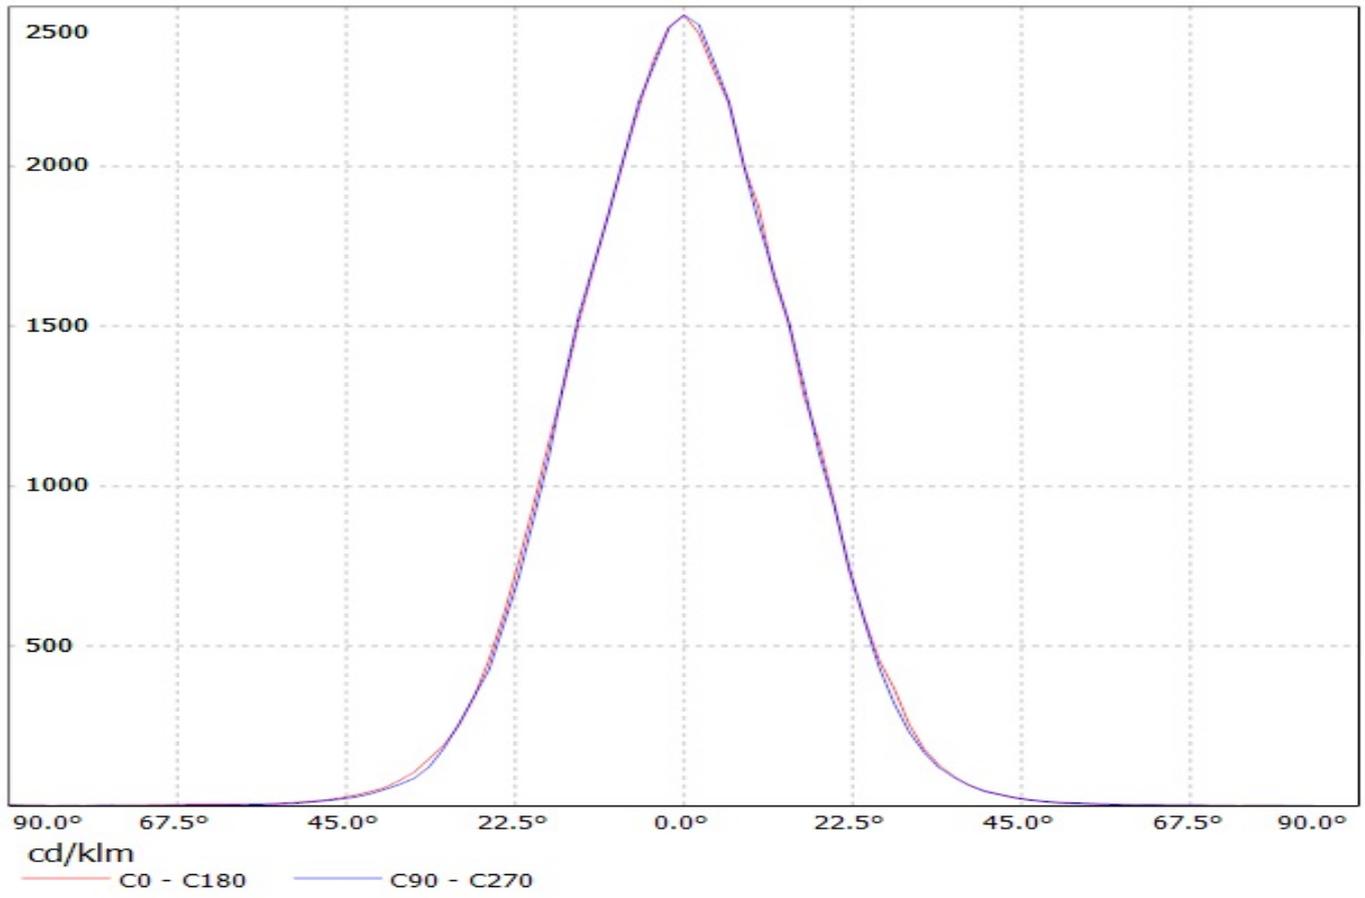

Luminaire: Ledil Oy C11191_TUIJA-3-W (Seoul Z5 223lm @ 250mA) Efficiency=88%
Lamps: 1 x Seoul Z5 223lm @ 250mA

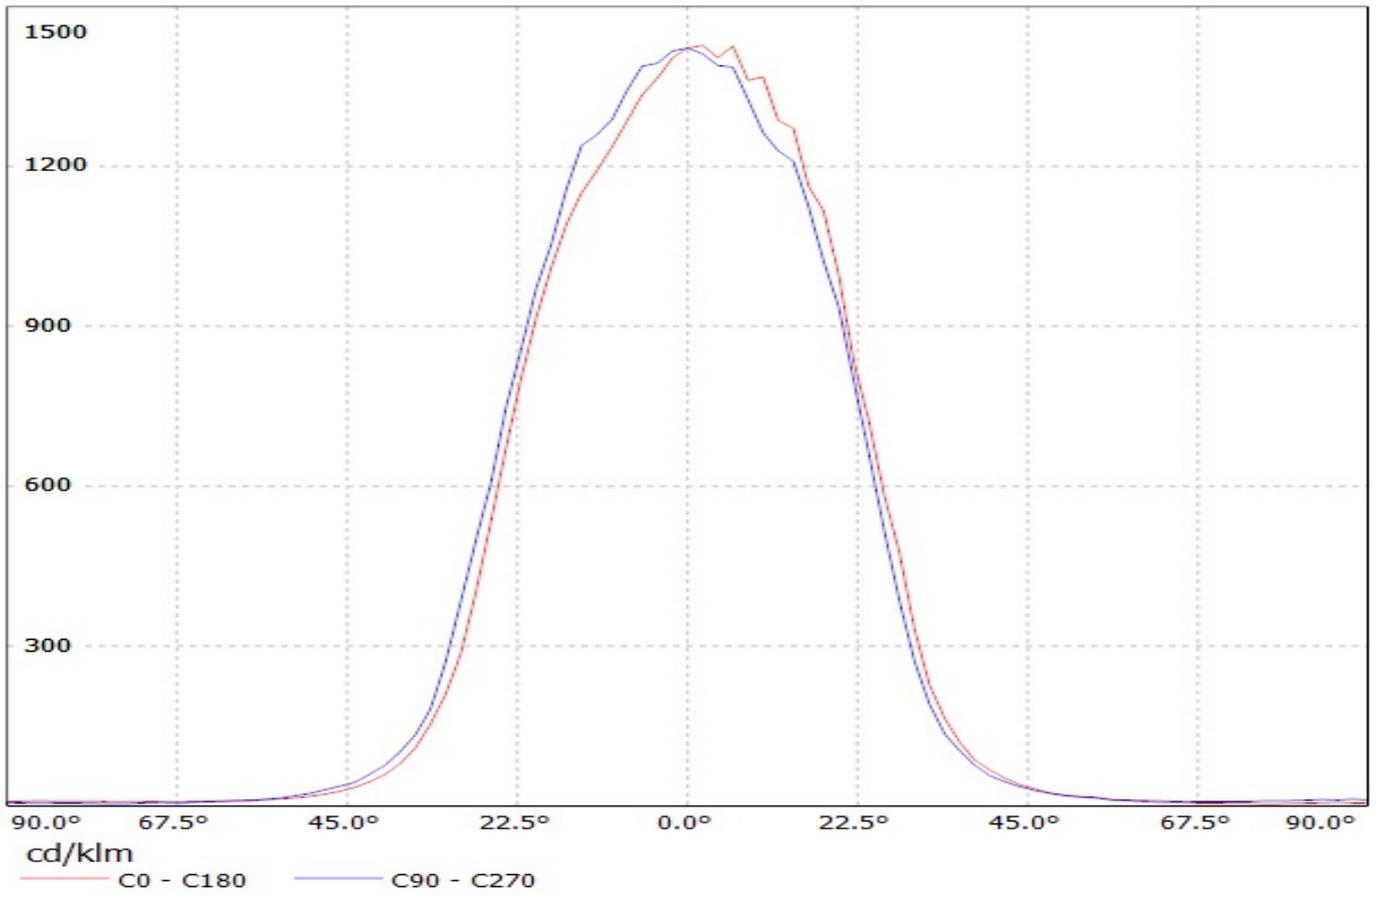

Luminaire: Ledil Oy C11192_TUJA-3-SS (Seoul Z5 223lm @ 250mA) Efficiency=93%
Lamps: 1 x Seoul Z5 223lm @ 250mA

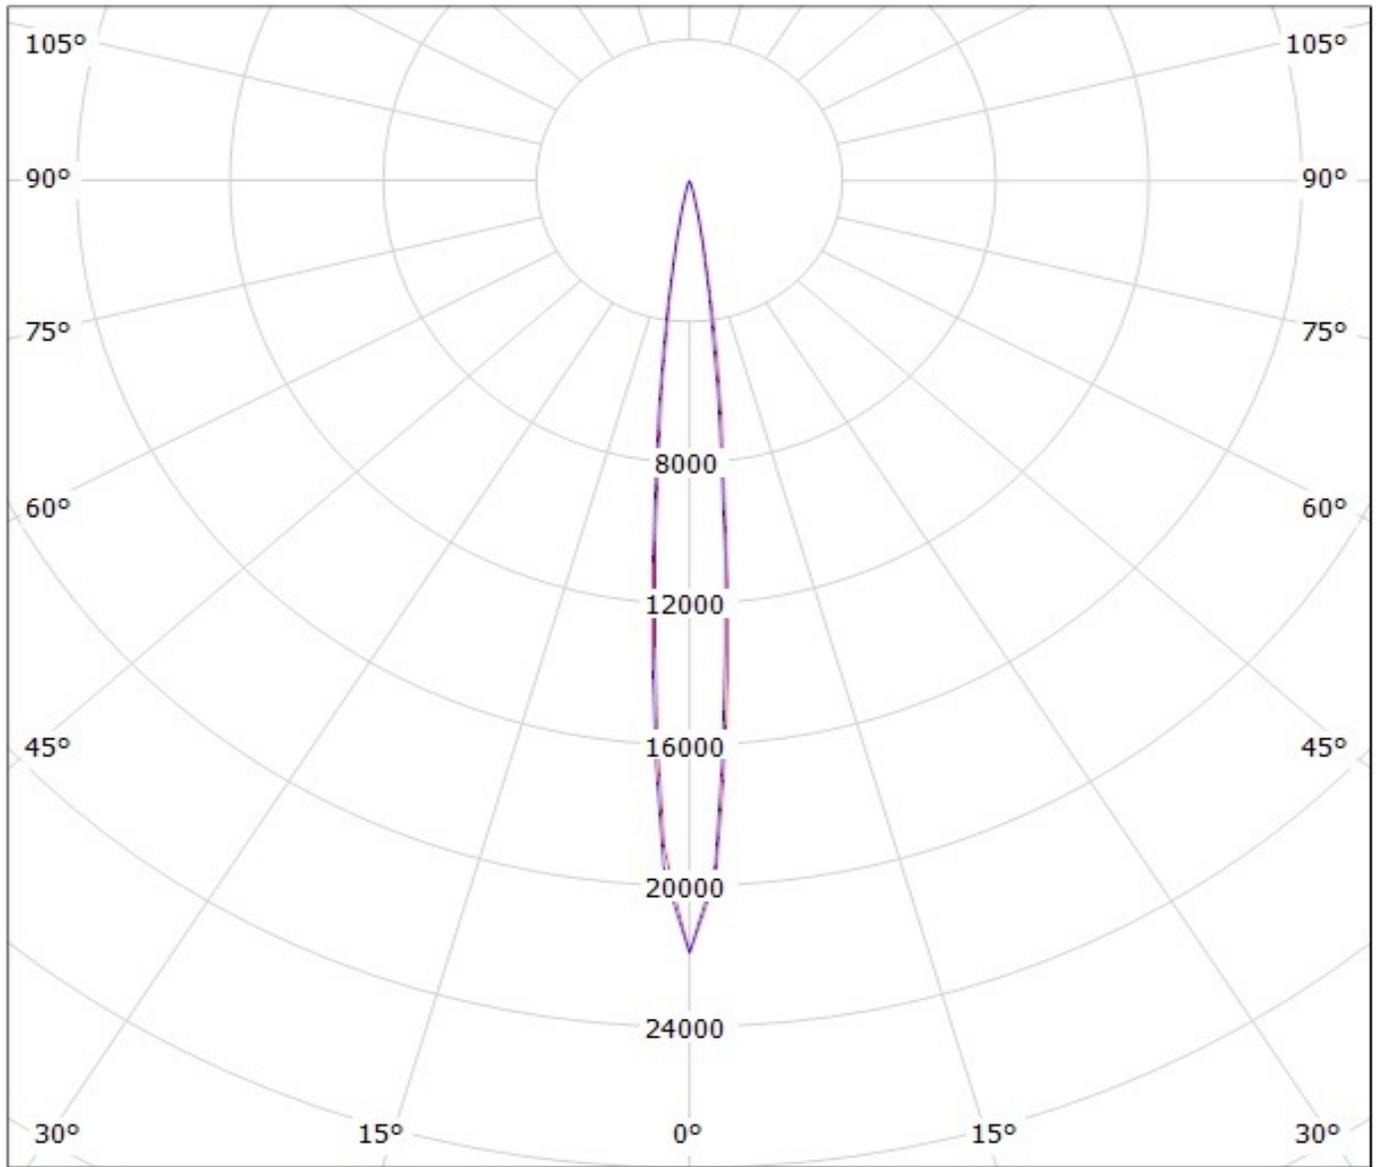


cd/klm

— C0 - C180


— C90 - C270

Luminaire: Ledil Oy C11193_TUIJA-3-M (Seoul Z5 223lm @ 250mA) Efficiency=93%
Lamps: 1 x Seoul Z5 223lm @ 250mA

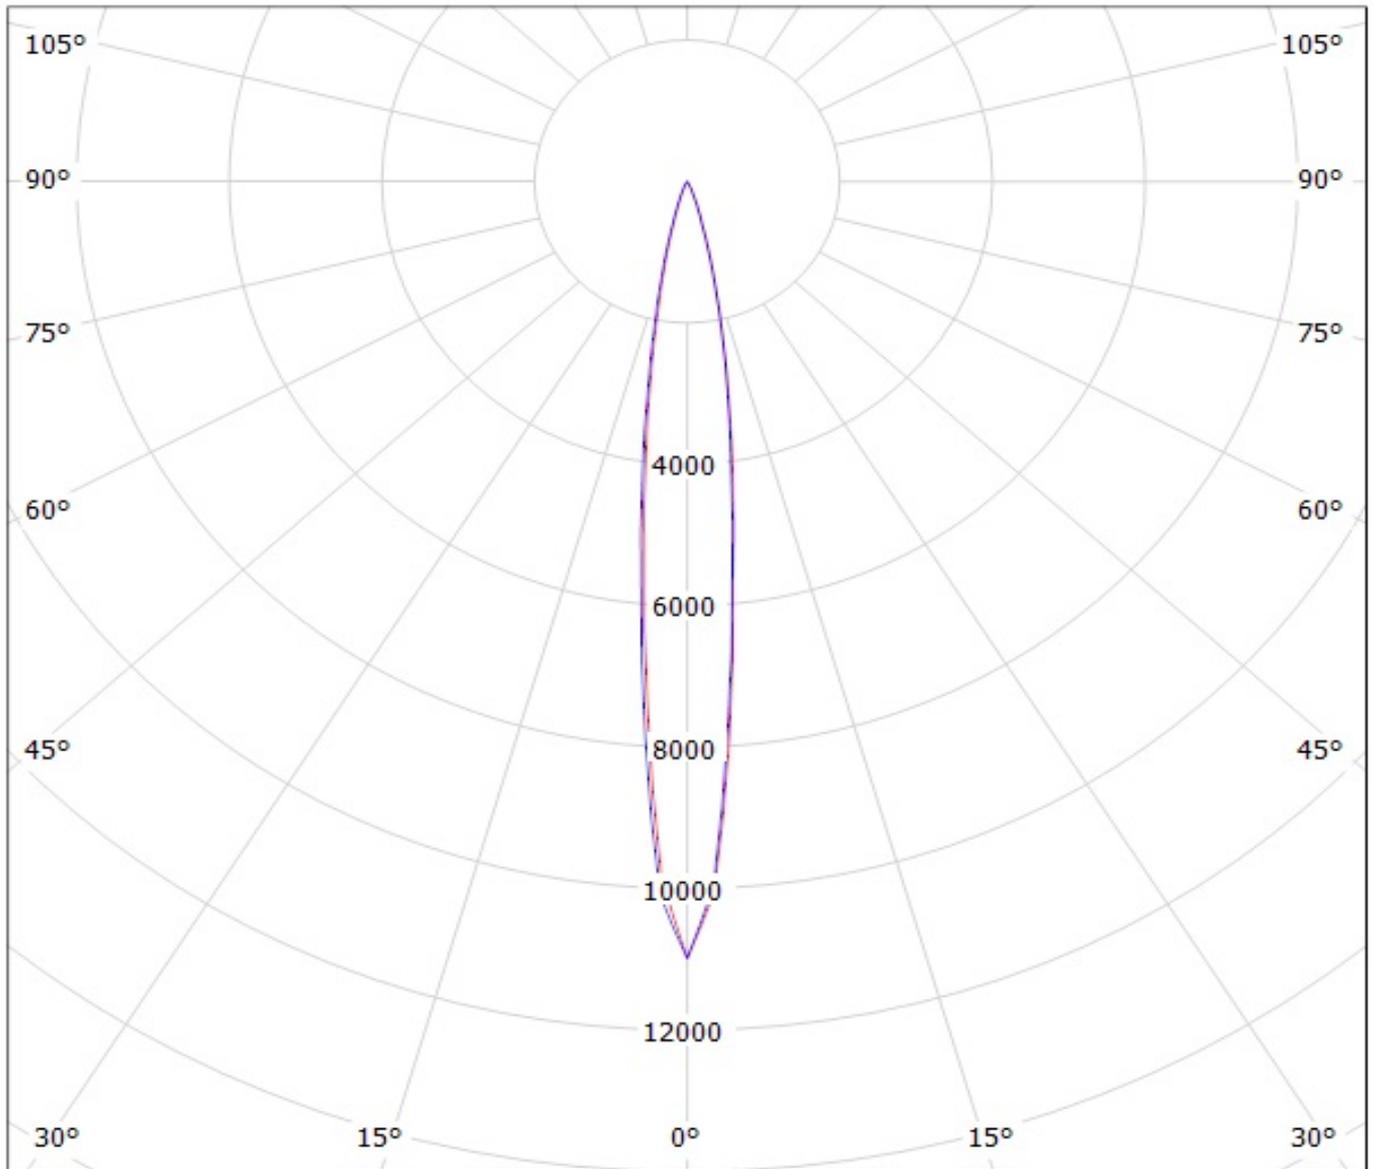


cd/klm
— C0 - C180 — C90 - C270

Luminaire: Ledil oy C12150_TUIJA-3-M2 (Seoul Z5 223lm @ 250mA) Efficiency=92%
Lamps: 1 x Seoul Z5 223lm @ 250mA

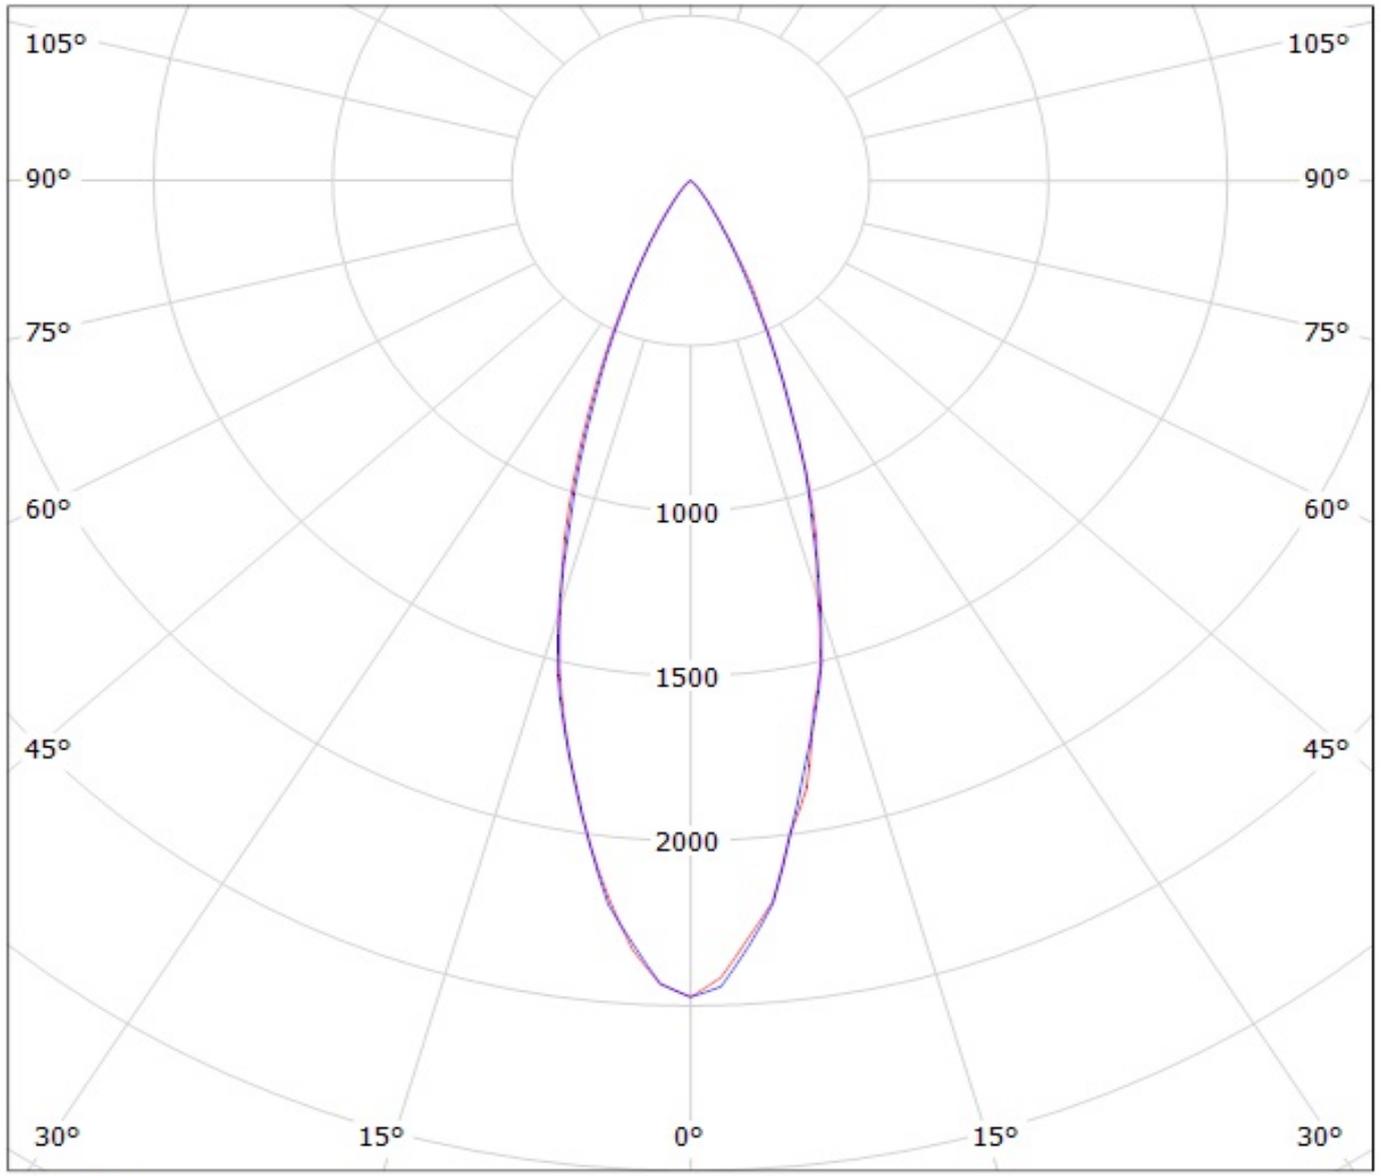

cd/klm
— C0 - C180 — C90 - C270

Luminaire: Ledil Oy C11191_TUIJA-3-W (Seoul Z5 223lm @ 250mA) Efficiency=88%
Lamps: 1 x Seoul Z5 223lm @ 250mA

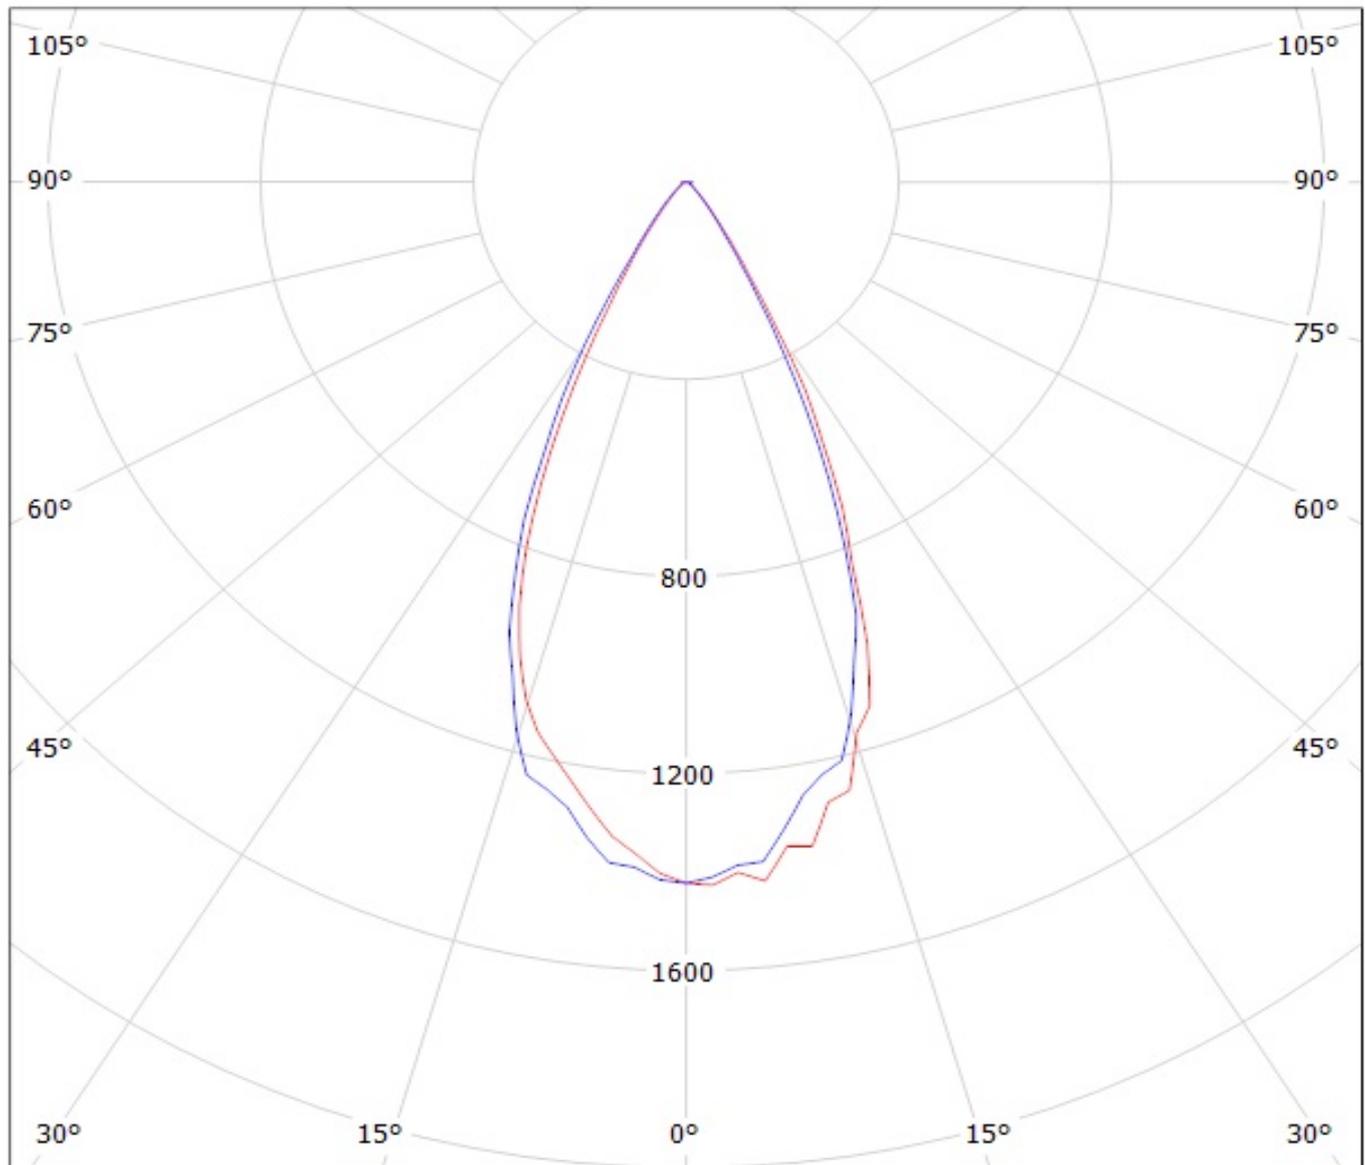

cd/klm

— C0 - C180 — C90 - C270