

DETAILS

Product Number	CA13473_STRADA-B2
Family	Strada-B2
Type	Assembly
Color	clear
Diameter	19,6 + 15,5 mm
Height	5.2 mm
Style	rectang
Optic Material	PMMA
Holder Material	
Fastening	pin, tape
Status	ready
ROHS Compliant	Yes
Date Updated	9/05/2014



OPTICAL PROPERTIES


LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
XP-G2	sim: 111+44	Streetligh...	sim: 92 %	sim: 0.000	-
LH351Z	116+42 deg	Streetligh...	89 %	0.590	-
XT-E	119+40 deg	Streetligh...	94 %	0.600	-

D



C

B


A

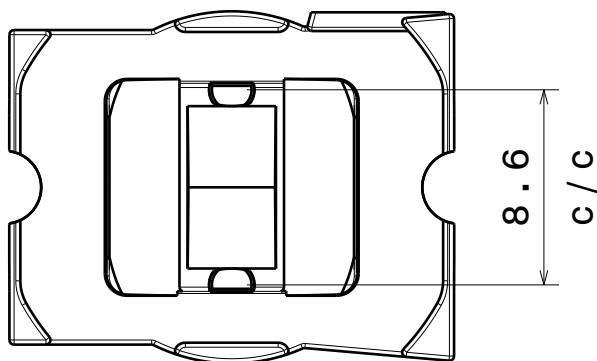

Bottom view

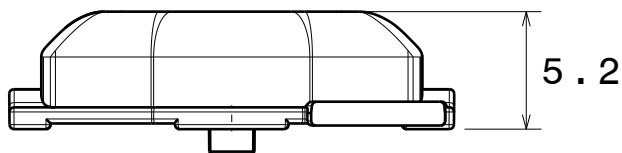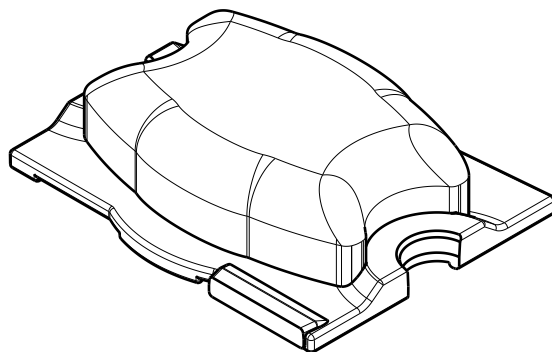

Front view

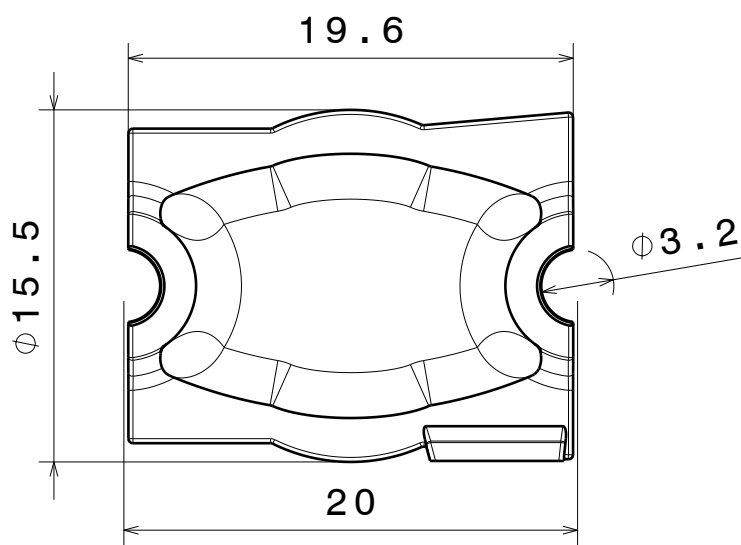

Top view


c / c

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L

LEDiL

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:



DRAWING TITLE

STRADA-B2 Mechanical drawing

This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy."

SIZE

A4

PART NUMBER

-

SCALE

3:1

WEIGHT

-


SHEET

1/1


D

A


Luminaire: LEDiL Oy CA13473_STRADA-B2_(LH351Z) Eff.88.8%
Lamps: 1 x SAMSUNG_LH351Z_90.238lm@250mA_P=0.747026W_I=249.9mA

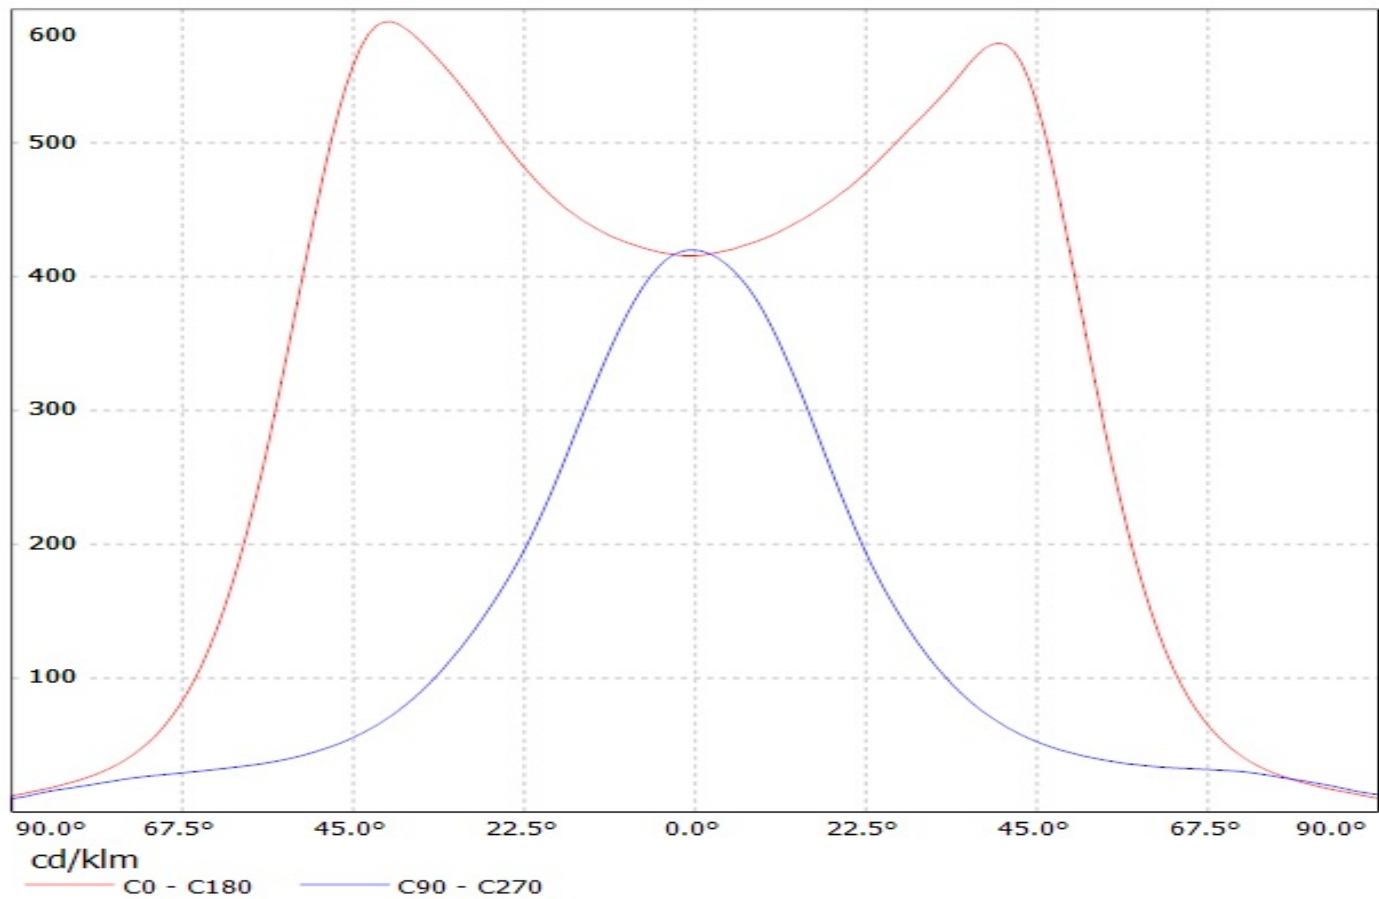


Luminaire: LEDiL Oy CA13473_STRADA-B2_(XT-E) Eff.94%
Lamps: 1 x CREE_XT-E 104.234lm@250mA CCT=4425K P=0,770367W I=249.9mA

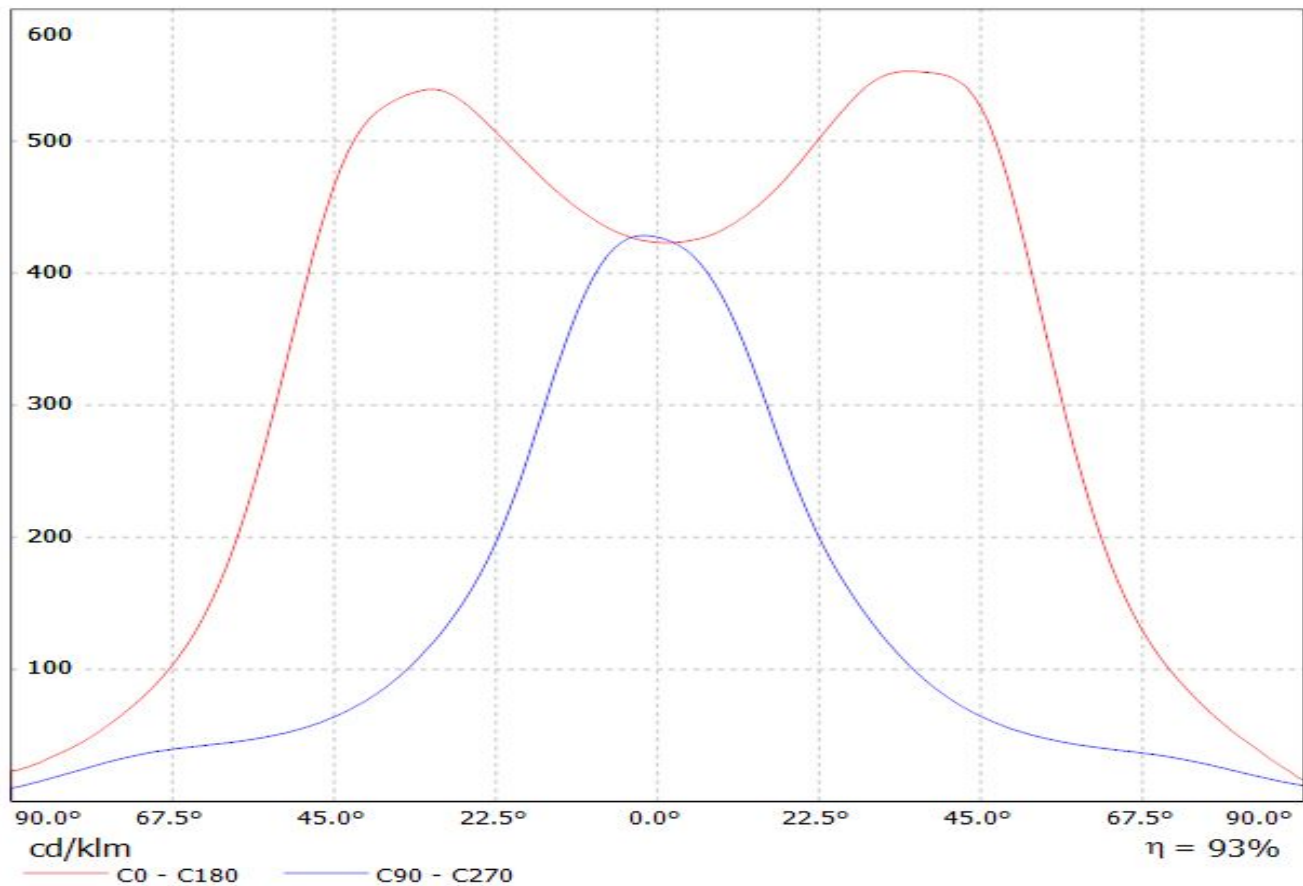

Luminaire: LEDiL Oy CA13473_STRADA-B2_(LH351Z) Eff.88.8%
Lamps: 1 x SAMSUNG_LH351Z_90.238lm@250mA_P=0.747026W_I=249.9mA

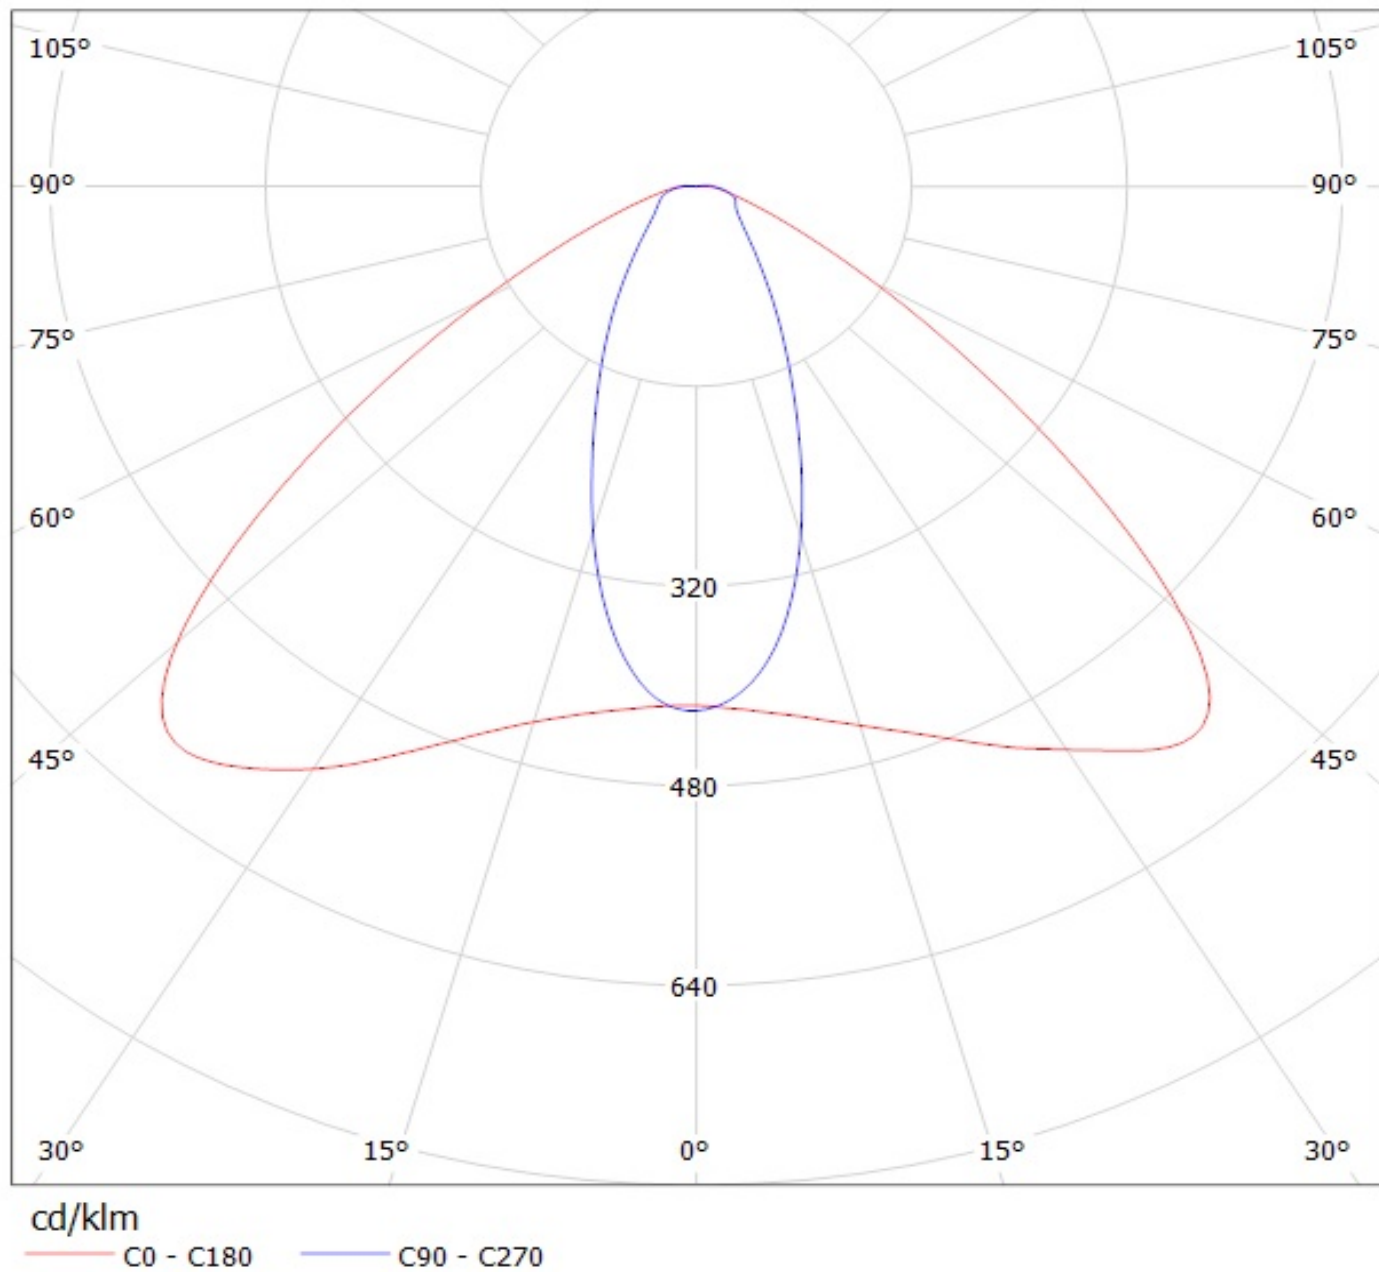

Luminaire: LEDiL Oy CA13473_STRADA-B2_(XT-E) Eff.94%
Lamps: 1 x CREE_XT-E 104.234lm@250mA CCT=4425K P=0,770367W I=249.9mA

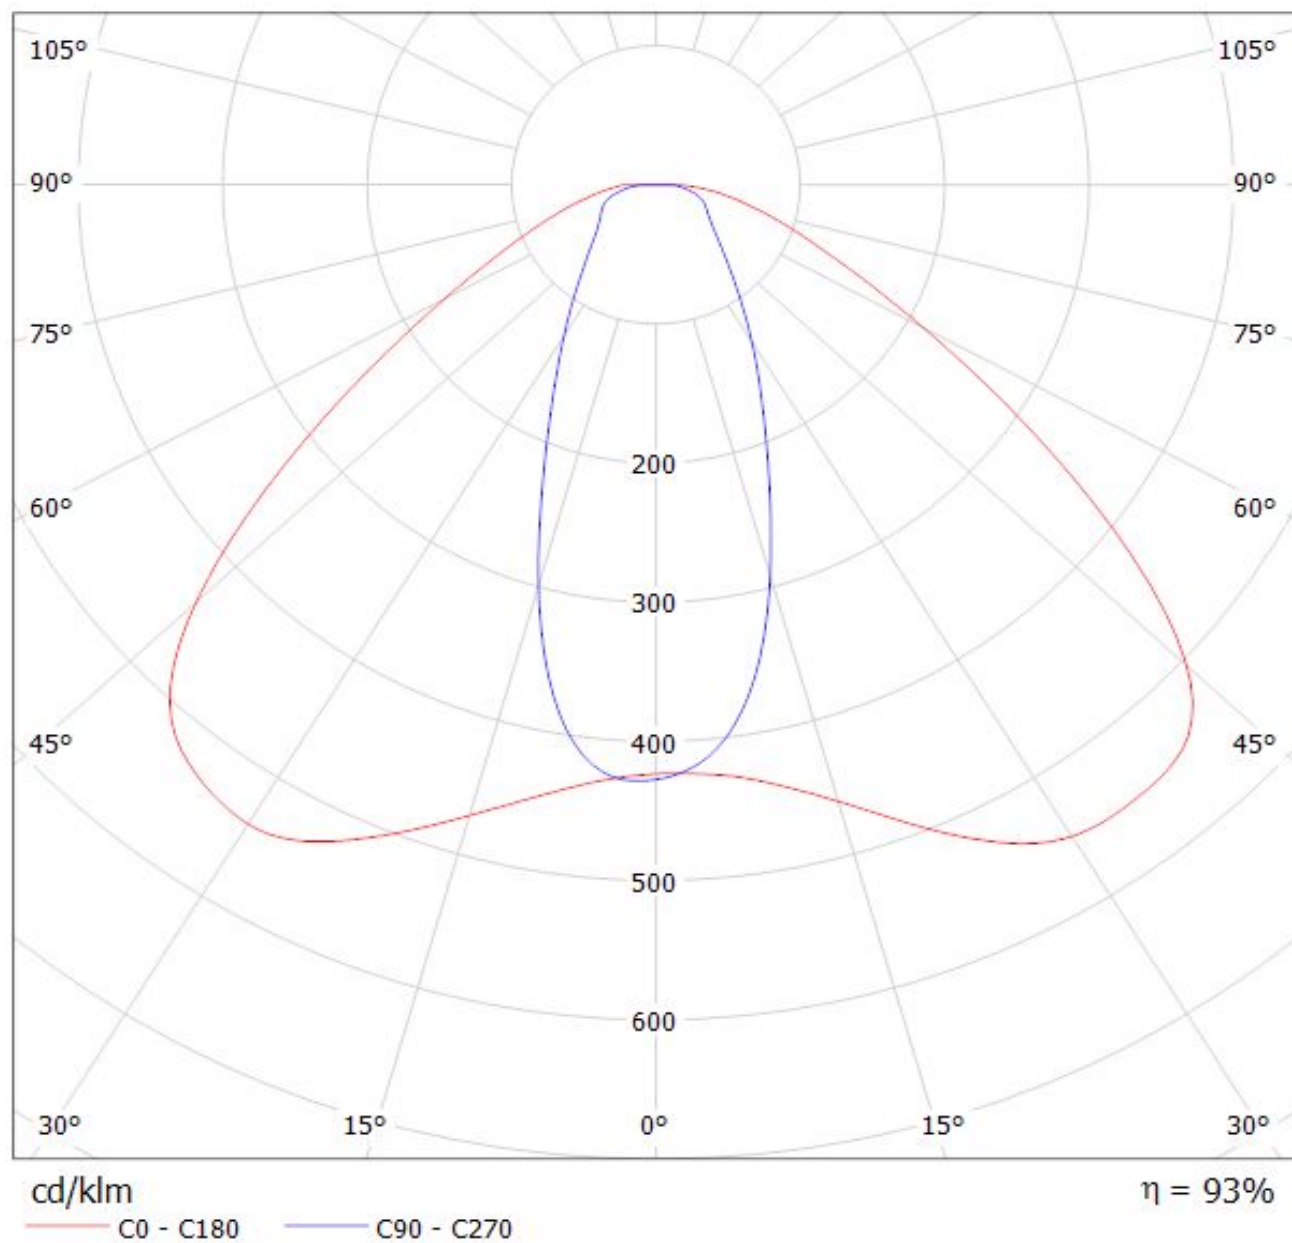

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.