
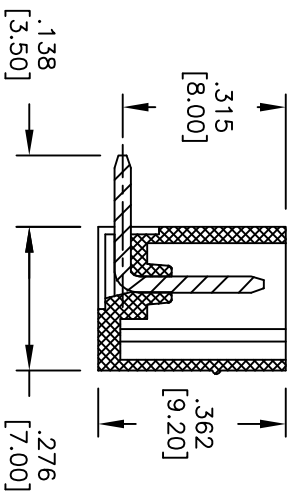
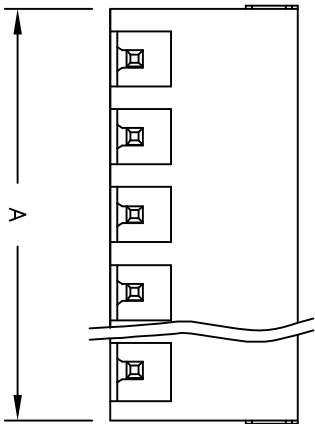


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/09	

APPROVED: _____
DATE: _____ TITLE: _____

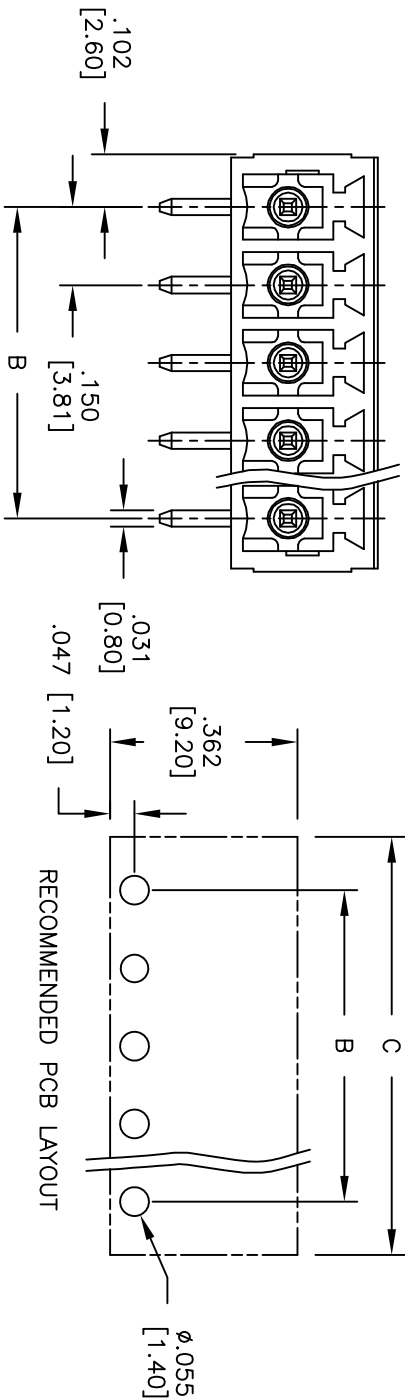

Poles: 2 thru 24

A = .150 [3.81] x No. of (Poles - 1) + .193 [4.90]

B = .150 [3.81] x No. of (Poles - 1)

C = .150 [3.81] x No. of (Poles - 1) + .205 [5.20]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.150 [3.81] TERMINAL BLOCK

SPECIFICATIONS:

Material:

- Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Contact: Brass, Tin plated

Electrical:

- Operation voltage: 300 VAC max
- Current rating: 10 Amps max
- Withstanding voltage: 1.6kv

Environmental:

- Operating temperature: -30°C to +105°C
- Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED				TITLE			
ALL DIMENSIONS ARE INCHES [MM]				909 Railway Avenue, Union, NJ 07083			
TOLERANCES: EXCEPT AS NOTED				Phone: 908-687-5000 Fax: 908-687-5710			
INCHES							
.X	± .10	ØX	± .10				
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	DR			10/22/09			
CHECKED							
APPROVED							
SIZE				PART NO.			
X				EB3-XX-B			
REF:				SCALE: NTS			
S00007T				SHEET 1 OF 1			