


EM-23976-000



SHT 1.1

NOTE:

1. INCREASED PRESSURE AT SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

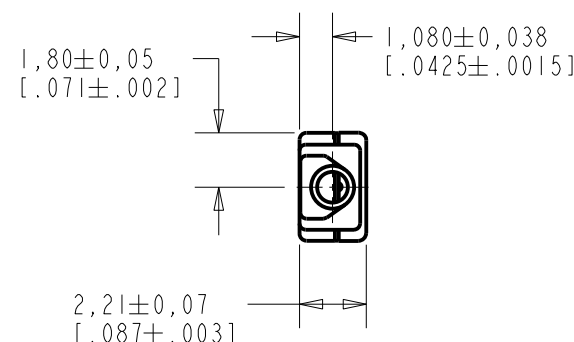


$1,41 \pm 0,04$
[$.0555 \pm .0015$]
OUTER DIAMETER



NOMINAL WEIGHT
.08 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]

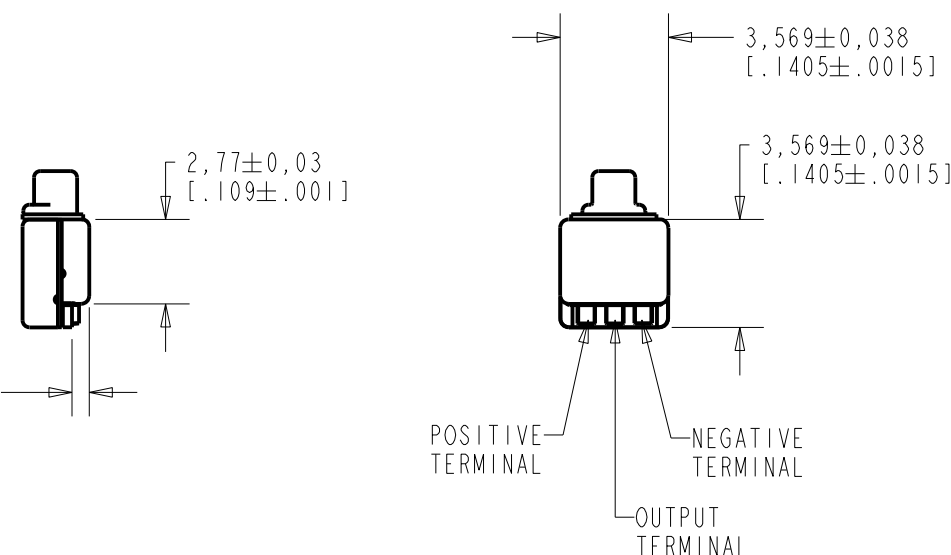


Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
			Active	J
J	MI0105773	10-20-14		
SCALE: 4:1			DR. BY	DATE
DO NOT SCALE DRAWING			MMM	6-28-05
TITLE: MICROPHONE OUTLINE DRAWING			CK. BY	DATE
			GJP	7-8-05
			APP. BY	DATE
			GJP	7-8-05
EM-23976-000 SHT 1.1				

KE111ASIZE.FRM

Rev: B

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

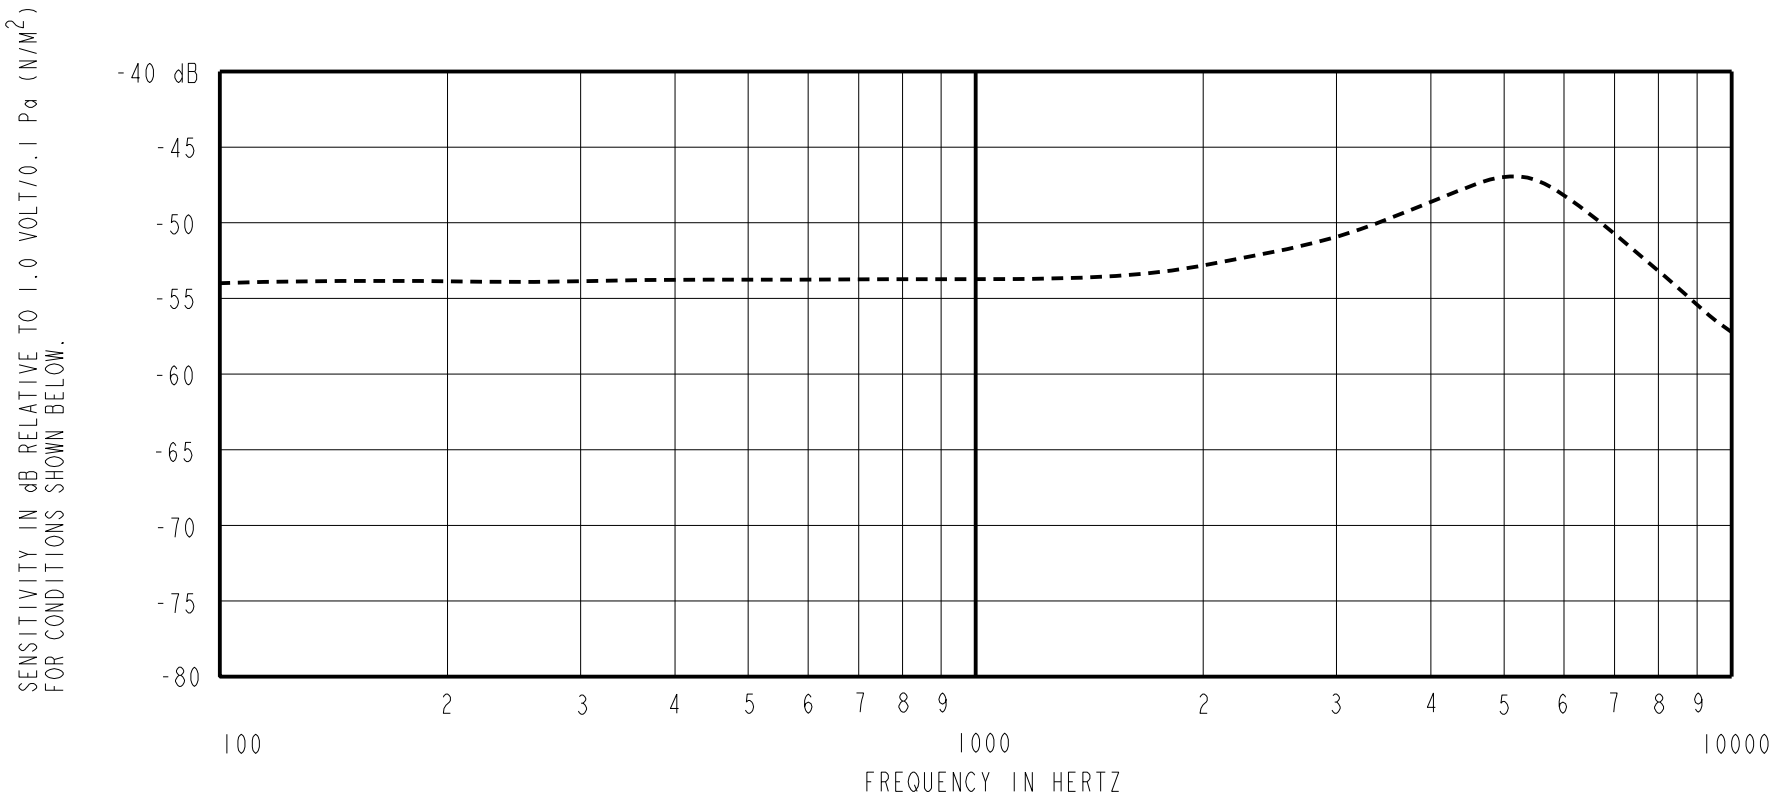

FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz	
100	---	-54.0	---	-3.0	+1.0
1000	-56.0	-54.0	-52.0	0.0	0.0
~5500	---	-47.0	---	+3.0	+9.0

- NOTES:
- 1. CASE CONNECT TO NEGATIVE TERMINAL.
 - 2. MICROPHONE TO BE FUNCTIONAL WITH 1.6 VDC SUPPLY.
 - 3. TYPICAL SENSITIVITY TO HUMIDITY AT 1000Hz IS 0.03 dB/%RH
 - 4. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (RE 1.0 VOLT)	OUTPUT IMPEDANCE OHMS		
					MIN.	NOM.	MAX.
12S	1.3V	50 µA MAX.	3 dB MAX.	28.0 dB MAX.	2800	4400	6800

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
			Active		J
J	M10105773	10-20-14			
TITLE:			WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION		DR. BY DATE
			MICROPHONE		MMM 6-28-05
PERFORMANCE SPECIFICATION			EM-23976-000		CK. BY DATE
			SHT 2.1		GJP 7-8-05
					APP. BY DATE
					GJP 7-8-05

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

EM-23976-000