
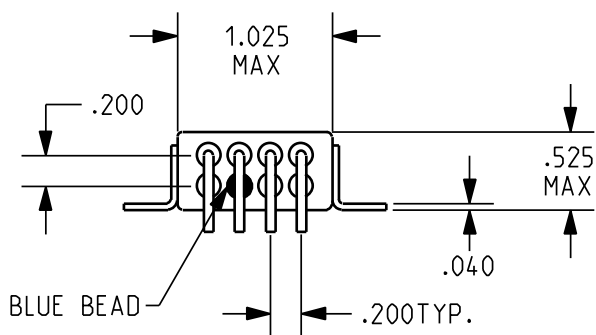


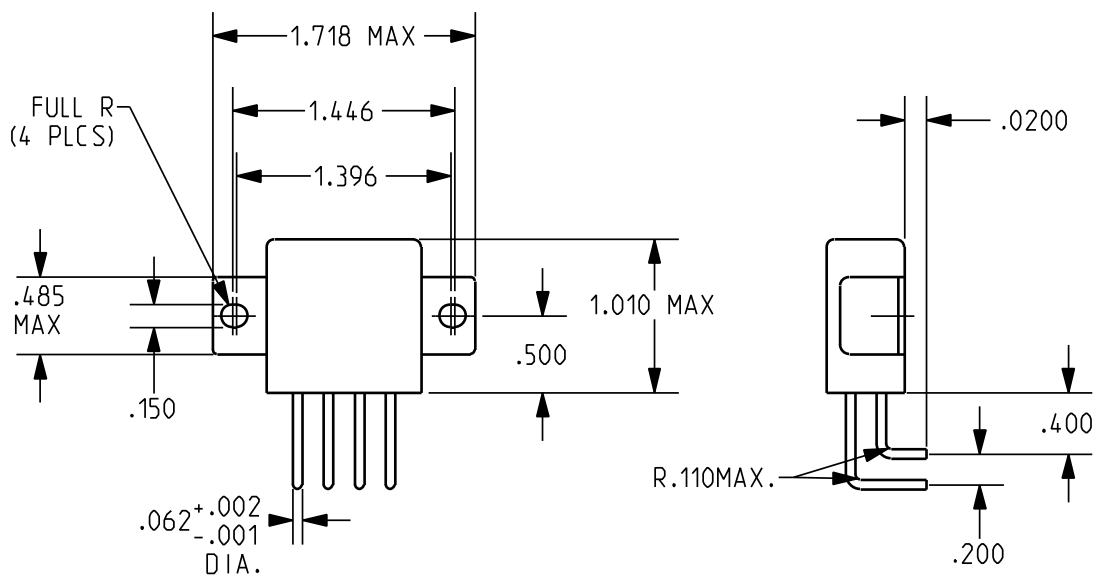

REV. C
DCO 300855


TOLERANCES $\pm .010$ " - UNLESS
OTHERWISE SPECIFIED

COIL: @ 25°C
RESISTANCE 920 OHMS $\pm 10\%$
NOMINAL VOLTAGE 48 VDC
MUST OPERATE 23.0 VDC MAX.
MUST RELEASE 10.0 VDC MAX., 3.8 VDC MIN.

ENVIRONMENT:
VIBRATION 33 Hz TO 3000 Hz @ 30 g's
SHOCK 200 g's 6 MS. DURATION
TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 10 MS MAX.
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

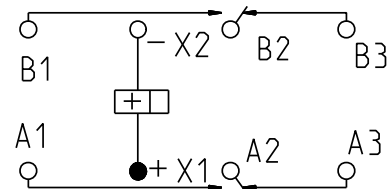

TERMINAL VIEW

CONTACT RATING:
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.
100,000 OPERATIONS

DR. B.D. 07MAR2008

CK. J.M.B. 5/14/08

Tyco Electronics

©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. CATALOG ITEM
CUST. NO. REV.

TE NUMBER
2-1617752-8

CII PART NUMBER
FCA-210-HX5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-210-HX5](#)