


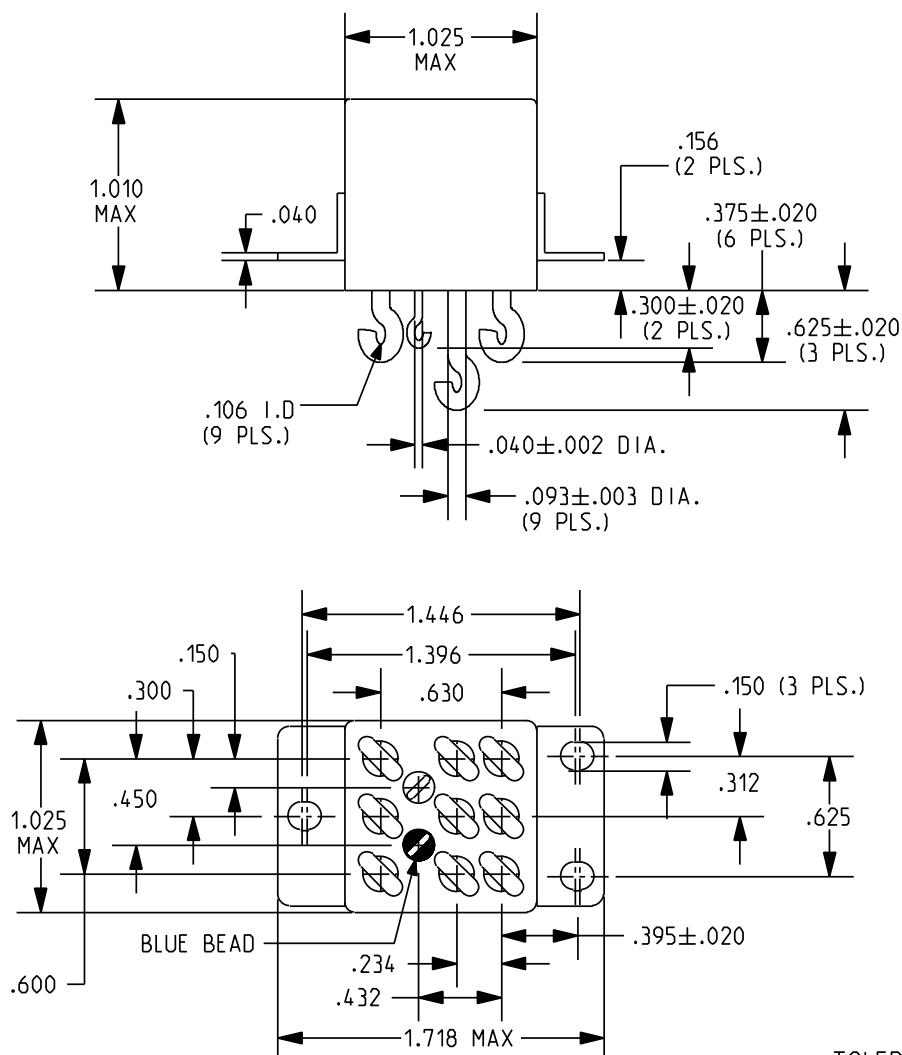


REV. C
DCO 300853

TOLERANCES ±.010" - UNLESS
OTHERWISE SPECIFIED

COIL: @ 25°C
 RESISTANCE 290 OHMS ±10%
 NOMINAL VOLTAGE 28 VDC
 MUST OPERATE 13.5 VDC MAX.
 MUST RELEASE 6.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:
 VIBRATION 33 Hz TO 3000 Hz @ 30 g's
 SHOCK 200 g's 6 MS. DURATION
 TEMPERATURE -70 °C TO +125 °C
 NOTES: OPERATE, RELEASE 15 MS MAX.
 CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

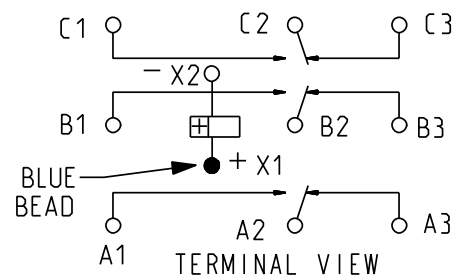

CONTACT RATING:
 25 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
 50,000 OPERATIONS

DR. B.D. 10APR2008 CK. J.M.B. 5/14/08

Tyco Electronics

©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. CATALOG
 CUST. NO. REV. N/A

TE NUMBER
 6-1617753-4

CII PART NUMBER
 FCA-325-CY3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-325-CY3](#)