




HER601 THRU HER608

HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current -6.0 Amperes

R-6

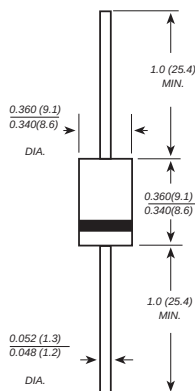

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ High speed switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: R-6 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.072 ounce, 2.05 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	HER 601	HER 602	HER 603	HER 604	HER 605	HER 606	HER 607	HER 608	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	1000	VOLTS
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	560	700	VOLTS
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375”(9.5mm) lead length at TA=50°C	I _(AV)	6.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	200.0								Amps
Maximum instantaneous forward voltage at 6.0A	V _F	1.0			1.3		1.70			Volts
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I _R	10.0 200.0								µA
Maximum reverse recovery time (NOTE 1)	t _{rr}	50					70			ns
Typical junction capacitance (NOTE 2)	C _J	100.0					65.0			pF
Typical thermal resistance (NOTE 3)	RθJA	10.0								°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-50 to +150								°C

Note: 1. Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $t_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



RATINGS AND CHARACTERISTIC CURVES HER601 THRU HER608

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

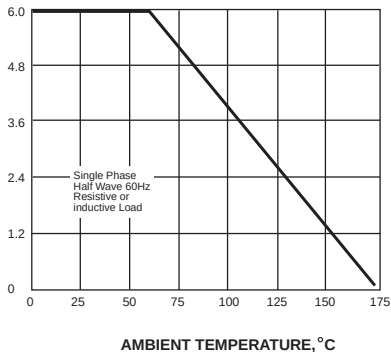

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

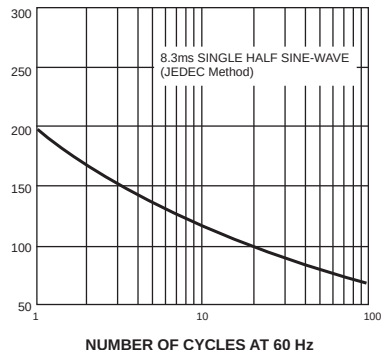


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

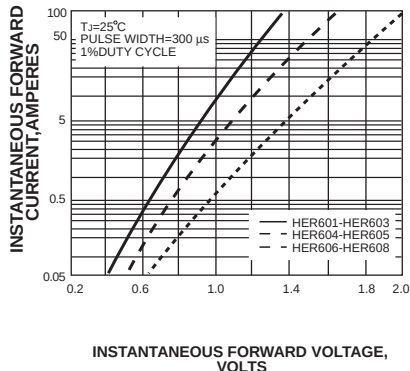


FIG. 4-TYPICAL REVERSE CHARACTERISTICS



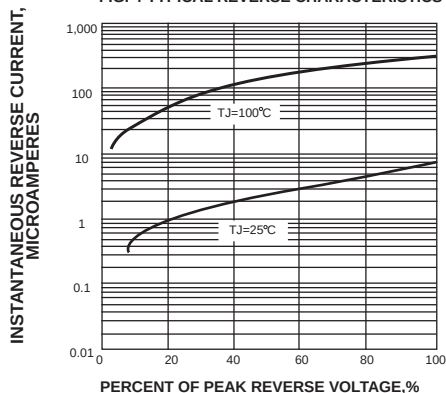


FIG. 5-TYPICAL JUNCTION CAPACITANCE

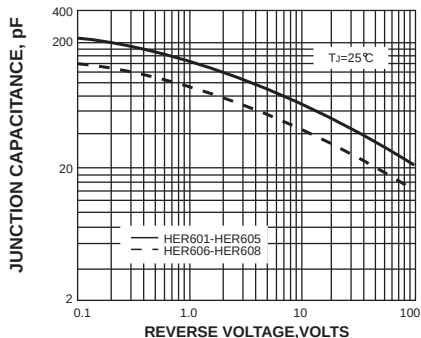

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

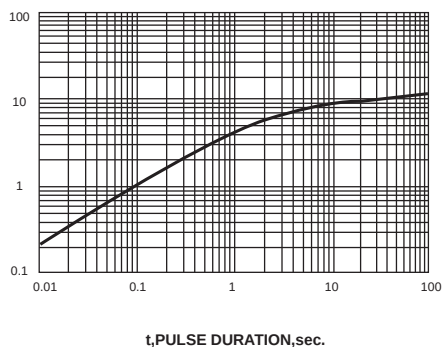

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!



www.microcode.com