

# General Specifications

## Electrical Capacity (Resistive Load)

**Low/Logic Level:** 50mA @ 24V DC maximum for Standard Operating Force models  
125mA @ 24V DC maximum for High Operating Force models

## Other Ratings

|                                 | Standard Operating Force             | High Operating Force                 |
|---------------------------------|--------------------------------------|--------------------------------------|
| <b>Contact Resistance:</b>      | 50 milliohms maximum                 | 50 milliohms maximum                 |
| <b>Insulation Resistance:</b>   | 500 megohms minimum @ 250V DC        | 500 megohms minimum @ 250V DC        |
| <b>Dielectric Strength:</b>     | 250V AC minimum for 1 minute minimum | 250V AC minimum for 1 minute minimum |
| <b>Mechanical Life:</b>         | 5,000,000 operations minimum         | 1,000,000 operations minimum         |
| <b>Electrical Life:</b>         | 5,000,000 operations minimum         | 1,000,000 operations minimum         |
| <b>Nominal Operating Force:</b> | 1.76N for JB15L                      | 2.65N for JB15HL & JB15HB            |
| <b>Total Travel:</b>            | .010" (.254mm)                       | .012" (.300mm)                       |

## Materials & Finishes

|                             |                                                               |
|-----------------------------|---------------------------------------------------------------|
| <b>Actuator:</b>            | Polyacetal for Short; Glass fiber reinforced PBT for Extended |
| <b>Case:</b>                | Glass fiber reinforced polyamide (UL94V-0)                    |
| <b>Seal:</b>                | Nitrile butadiene rubber                                      |
| <b>Base:</b>                | Glass fiber reinforced PBT (UL94V-0)                          |
| <b>Movable Contacts:</b>    | Stainless steel                                               |
| <b>Stationary Contacts:</b> | Brass with silver plating                                     |
| <b>Terminals:</b>           | Brass with silver plating                                     |

## Environmental Data

|                                     |                                                                                                                                              |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature Range:</b> | -25°C through +70°C (-13°F through +158°F)                                                                                                   |
| <b>Humidity:</b>                    | 90 ~ 95% humidity for 240 hours @ 40°C (104°F)                                                                                               |
| <b>Vibration:</b>                   | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours |
| <b>Shock:</b>                       | 50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)                               |

## PCB Processing

|                   |                                                                                                                            |
|-------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Soldering:</b> | Wave Soldering recommended. See Profile A in Supplement section.<br>Manual Soldering: See Profile A in Supplement section. |
| <b>Cleaning:</b>  | Automated cleaning. See Cleaning specifications in Supplement section.                                                     |

## Standards & Certifications

|                                |                                                                                                                                                                                                                                                                                                              |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Flammability Standards:</b> | UL94V-0 rated case & base<br>The JB Series tactiles have not been tested for UL recognition or CSA certification.<br>These switches are designed for use in a low-voltage, low-current, logic-level circuit.<br>When used as intended in a logic-level circuit, the results do not produce hazardous energy. |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

# Distinctive Characteristics

Choice of dimensions from PCB to top of cap adds to design flexibility.

Bright, full-face illumination with red, green, or yellow LEDs for attractive, functional panel layouts.

Higher operating force type provides more pronounced operating feel.


Dome contact gives crisp tactile feedback to positively indicate circuit transfer and assures high reliability and long life of up to 5,000,000 operations.

Rubber seal construction prevents contact contamination and allows automated soldering and cleaning.

Slanted terminals provide a spring type action which ensures secure mounting and prevents dislodging during wave soldering.

Molded-in terminals are part of the sealed construction which allows automated soldering and cleaning.

Terminal spacing conforms to standard .100" (2.54mm) PCB grid.


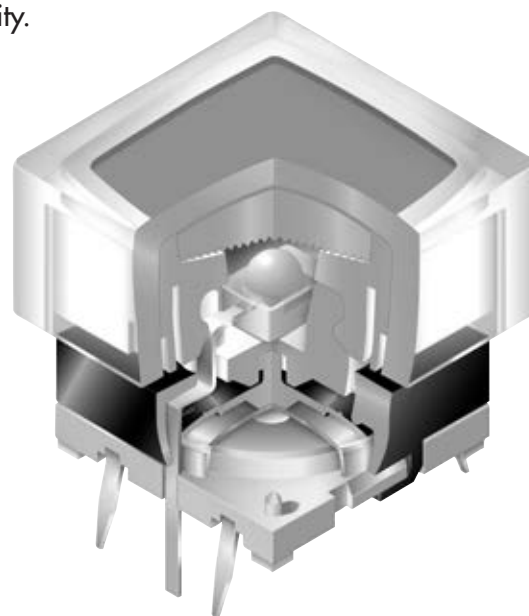


Actual Size





## Common Bus Matrix

These single pole, single throw switches can be used in a keyboard matrix and, using strapped terminals, achieve a common bus electrical configuration on a single-sided PC board.

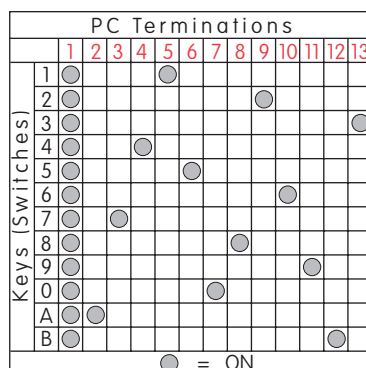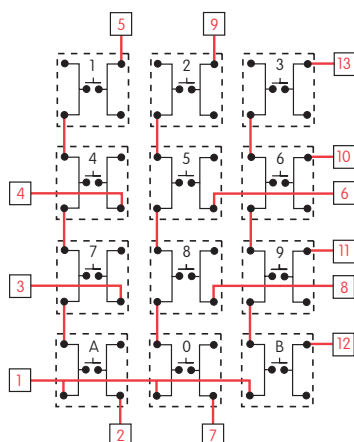

## X-Y Matrix

These single pole, single throw switches can be arranged on a single-sided PC board matrix with strapped terminals to achieve an X-Y type electrical interconnection.

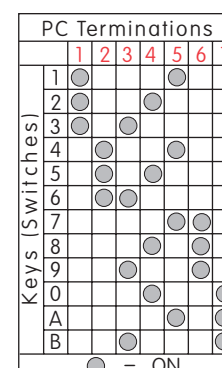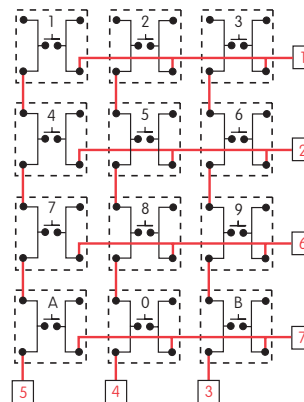

Red = PCB Trace    Black = Switch Circuit

TYPICAL SWITCH ORDERING EXAMPLE

JB

15

L

P

C

—

JC

| Pole & Circuit  |      |     |      |
|-----------------|------|-----|------|
| 15              | SPST | OFF | (ON) |
| ( ) = Momentary |      |     |      |

| Actuators |                                   |
|-----------|-----------------------------------|
| L         | Short                             |
| B         | Extended (H operating force only) |

| Operating Force |                            |
|-----------------|----------------------------|
| No Code         | Standard (L actuator only) |
| H               | High                       |


| Terminals |             |
|-----------|-------------|
| P         | Straight PC |

| LED Colors |        |
|------------|--------|
| C          | Red    |
| E          | Yellow |
| F          | Green  |

| Cap Types & Colors                                   |                   |
|------------------------------------------------------|-------------------|
| Flat Cap Colors                                      |                   |
| B                                                    | Translucent White |
| C                                                    | Red               |
| E                                                    | Yellow            |
| F                                                    | Green             |
| Flat Cap Lens/Diffuser Colors                        |                   |
| JB                                                   | Clear/White       |
| JC                                                   | Clear/Red         |
| JE                                                   | Clear/Yellow      |
| JF                                                   | Clear/Green       |
| For JC, JE & JF, diffuser color must match LED color |                   |
| Framed Cap Button/Frame Colors                       |                   |
| BB                                                   | White/White       |
| BC                                                   | White/Red         |
| BE                                                   | White/Yellow      |
| BF                                                   | White/Green       |
| BH                                                   | White/Gray        |

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

JB15LPC-JC

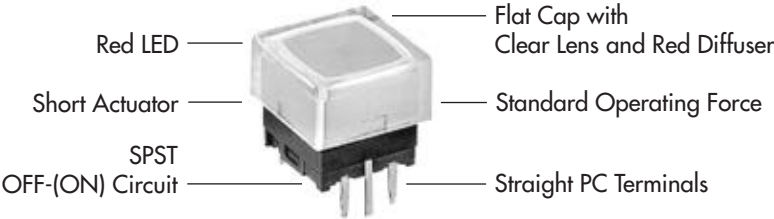

POLE & CIRCUIT

| Pole & Throw | Model | Actuator Position<br>( ) = Momentary |      | Switch Throw & Schematic | LED Schematic | Notes: Terminal numbers are shown on switch. LED circuit is isolated & requires external power source. |
|--------------|-------|--------------------------------------|------|--------------------------|---------------|--------------------------------------------------------------------------------------------------------|
|              |       | Normal                               | Down |                          |               |                                                                                                        |
| SPST         | JB15  | OFF                                  | (ON) | SPST<br>                 |               |                                                                                                        |

OPERATING FORCE

No  
Code

Standard  
Nominal Operating Force  
1.76N

Available with short actuator only (code L)

H



High  
Nominal Operating Force  
2.65N

Available with both short and extended actuators


ACTUATORS

L

Short Actuator

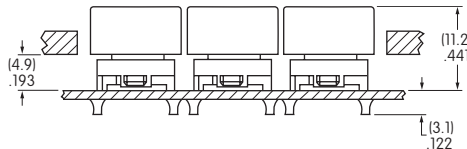


Custom keyboards can be designed with caps installed through a panel cutout (illustration with cap AT4060).




B


Extended Actuator



High operating force only

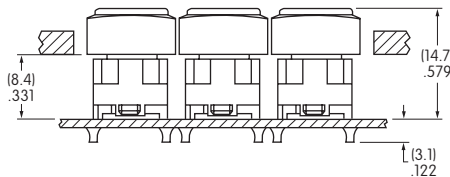

Custom keyboards can be designed with caps installed through a panel cutout (illustration with cap AT4076).





TERMINALS

P

Straight PC Terminals

Further details in Typical Switch Dimensions



LED COLORS & SPECIFICATIONS

LEDs are supplied as an integral part of illuminated devices and are not available separately.

LED polarity markings are on the bottom of the switch.

The electrical specifications shown here are determined at a basic temperature of 25°C.

If the source voltage exceeds the rated voltage, a ballast resistor is required.

The resistor value can be calculated by using the formula in the Supplement section.

|                                   |              | <div>C</div><br>Red | <div>E</div><br>Yellow | <div>F</div><br>Green |
|-----------------------------------|--------------|---------------------|------------------------|-----------------------|
| Color                             |              | Red                 | Yellow                 | Green                 |
| Maximum Forward Current           | $I_{FM}$     | 30mA                | 20mA                   | 30mA                  |
| Typical Forward Current           | $I_F$        | 10mA                | 10mA                   | 10mA                  |
| Forward Voltage                   | $V_F$        | 1.8V                | 2.0V                   | 2.1V                  |
| Maximum Reverse Voltage           | $V_{RM}$     | 5V                  | 5V                     | 5V                    |
| Current Reduction Rate Above 25°C | $\Delta I_F$ | * 0.50mA/°C         | * 0.33mA/°C            | * 0.50mA/°C           |
| Ambient Temperature Range         |              | -25°C ~ +70°C       |                        |                       |

\* Applies to temperatures above 50°C

### SNAP-ON CAPS

#### AT4135 Flat

Cap Color Codes:



Translucent White



Yellow




Red



Green


Material: Polycarbonate

Finish: Frosted



#### AT4060 Flat


Lens/Diffuser  
Color Codes:



#### Framed:

#### AT4076 Button with Frame

Translucent Button/Frame  
Color Codes:



Clear/Translucent White



White/White



Clear/Red



White/Red



Clear/Yellow



White/Yellow





Clear/Green



White/Green



White/Gray



Material: Polycarbonate


Lens Finish: Glossy

Material: Polycarbonate


Button Finish: Frosted

### TYPICAL SWITCH DIMENSIONS



#### Flat Snap-on Cap



Short  
Actuator




Extended  
Actuator




JB15LPC-JC

Spring action terminals conform to .100" (2.54mm) PCB spacing



#### Framed Snap-on Cap



Short  
Actuator



Extended  
Actuator



JB15HBPC-BC

Spring action terminals conform to .100" (2.54mm) PCB spacing

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for Cap, Lens, or Button

Recommended Methods:




Laser Etch, Screen Print or Pad Print

Laser Etch or Pad Print

Epoxy based ink is recommended.





Epoxy based ink is recommended.



Shaded areas are printable areas.

Suggested Printable Area for Film Insert



Shaded area is printable area.

Film Insert: Clear Polyester 7 mil maximum thickness

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## NKK Switches:

[JB15LPC-BC](#) [JB15HBPE](#) [JB15HBPE-JB](#) [JB15HBPF](#) [JB15HBPF-JB](#) [JB15HBPF-JF](#) [JB15HBPC-JB](#) [JB15HBPC](#)  
[JB15LPE](#) [JB15LPC](#) [JB15LPC-JB](#) [JB15HBPE-JE](#) [JB15HBPC-JC](#) [JB15HLPF-JB](#) [JB15HLPF-JF](#) [JB15LPF](#) [JB15LPF-](#)  
[BH](#) [JB15LPF-BF](#) [JB15LPF-JB](#) [JB15LPF-JJ](#) [JB15HLPC-JB](#) [JB15HLPC-JC](#) [JB15LPC-JC](#) [JB15LPF-JF](#) [JB15LPE-JE](#)  
[JB15HLPE-JE](#) [JB15HLPE-JB](#) [JB15HBPF-1179](#) [JB15HBPB](#) [JB15HBPB-JB](#) [JB15LPC-BE](#) [JB15LPC-BF](#) [JB15LPE-](#)  
[E](#) [JB15LPF-F](#) [JB15LPCC](#) [JB15HBPC-BB](#) [JB15HBPC-BC](#) [JB15HBPC-BH](#) [JB15HBPE-BB](#) [JB15HBPE-BE](#)  
[JB15HBPE-BH](#) [JB15HBPF-BB](#) [JB15HBPF-BF](#) [JB15HBPF-BH](#) [JB15HLPC](#) [JB15HLPC-BH](#) [JB15HLPE](#) [JB15HLPF](#)  
[JB15LPC-BH](#) [JB15LPE/909](#) [JB15LPE-BB](#) [JB15LPE-BE](#) [JB15LPE-BH](#) [JB15LPE-JB](#) [JB15LPF-BB](#) [JB15HBPF-F](#)  
[JB15LPC-B](#) [JB15LPC-BB](#) [JB15HBPC-B](#) [JB15LPG](#) [JB15HLPF-B](#) [JB15HLPF-BH](#) [JB15HBPE-BF](#) [JB15LPC-JF](#)  
[JB15LPC-JE](#) [JB15HBPE-BC](#)