

# LF SERIES CLASS H/K5 AND R FUSE BLOCKS

250 V • 600 V



## Description

The Littelfuse Class H/K5 and R blocks offer many benefits such as indication, snap-to-release DIN rail mounting and universal mounting holes. Class H and Class R fuse blocks are dimensionally the same, but Class R blocks incorporate a rejection feature, which only allows Class R fuses to be inserted.

## Features/Benefits

- Universal mounting holes for easy replacement
- Indication offered on most 250 V and 600 V versions
- One hand release from DIN rail for ferrule style fuses
- Reinforced fuse clips are standard on all Class H and Class R fuse blocks
- Covers available for 100 A and lower to enhance safety

## Specifications

<b>Voltage Rating</b>	250 V, 600 V
<b>Ampere Ratings</b>	0-600 A
<b>Leakage Current</b>	<0.6 mA at 600 V
<b>Withstand Rating</b>	Class H: 10 kA RMS SYM Class R: 200 kA RMS SYM
<b>Flammability Rating</b>	UL94 V-0
<b>Approvals</b>	UL Listed (File: E14721) CSA Certified (File: LR7316)
<b>Environmental</b>	RoHS Compliant, Lead (Pb) Free

## Web Resources

Sample requests, downloadable CAD drawings and other technical information: [littelfuse.com/lfh](http://littelfuse.com/lfh)  
[littelfuse.com/lfr](http://littelfuse.com/lfr)

## Recommended Fuses

- Class H/K5 Blocks – 250 V**  
NLN
- Class R Blocks – 250 V**  
FLNR/FLNR\_ID, KLN, LLNRK
- Class H/K5 Blocks – 600 V**  
NLS
- Class R Blocks – 600 V**  
FLSR/FLSR\_ID, KLSR, LLSRK/LLSRK\_ID, IDSR

## Ordering Information (Class H 250 V)

AMP RATING	POLES	ORDERING NUMBER				TORQUE	TERMINAL	WIRE RANGE	WIRE TYPE	BASE TEMP RATING	DIN RAIL	INDICATION	COVER ORDERING NUMBER*
		BASE PART NUMBER	BOX LUG	SUFFIX PRESSURE PLATE	SCREW								
30	1	LFH250301	C	P	S	2.8 N-m (25 in-lbs)	C	6-14 AWG	CU Only	125°C	•	—	LFH25030FBC
	2	LFH250302	C	P	S		P	10-14 AWG					
	3	LFH250303	C	P	S		S	10-22 AWG					
60	1	LFH250601	CID	—	—	5.6 N-m (50 in-lbs)	2-4 AWG		CU-AL	125°C	•	•	LFH25060FBC
	2	LFH250602	CID	—	—		6-14 AWG						
	3	LFH250603	CID	—	—		2/0-6 AWG						
100	1	LFH251001	CID	—	—	13.6 N-m (120 in-lbs) 4.5 N-m (40 in-lbs) 4.0 N-m (35 in-lbs)	8 AWG	CU-AL Solid/ Stranded	130°C	—	•	LFH25100FBC	
	3	LFH251003	CID	—	—		10-14 AWG						
	1	LFH252001	C	—	—		250 kcmil-6						CU-AL
3	LFH252003	C	—	—	31.1 N-m (275 in-lbs)								
400	1	LFH254001	C	—		—	31.1 N-m (275 in-lbs)	(2) 350 kcmil-1/0	CU-AL	130°C	—	—	—
	3	LFH254003	C	—	—								
600	1	LFH256001	C	—	—	42.4 N-m (375 in-lbs)	(2) 500 kcmil-4	CU-AL	130°C	—	—	—	
	3	LFH256003	C	—	—								

Note: Reinforcing springs standard on all Class H fuse blocks. \*Covers sold individually. One cover needed for each pole.

# LF SERIES CLASS H/K5 AND R FUSE BLOCKS

## Ordering Information (Class H 600 V)

AMP RATING	POLES	ORDERING NUMBER			TORQUE	TERMINAL	WIRE RANGE	WIRE TYPE	BASE TEMP RATING	SNAP TO RELEASE	INDICATION	COVER ORDERING NUMBER*	
		BASE ORDERING NUMBER	BOX LUG	SUFFIX PRESSURE PLATE									SCREW
30	1	LFH600301	CID	PID	SID	2.8 N-m (25 in-lbs)	C	6-14 AWG	CU Only	130°C	•	•	
	2	LFH600302	CID	PID	SID		P	10-14 AWG					
	3	LFH600303	CID	PID	SID		S	10-22 AWG					
60	1	LFH600601	CID	—	—	5.6 N-m (50 in-lbs)	2-4 AWG		CU-AL	130°C	•	•	
	2	LFH600602	CID	—	—		2.8 N-m (25 in-lbs)	6-14AWG					
	3	LFH600603	CID	—	—			6-14AWG					
100	1	LFH601001	CID	—	—	13.6 N-m (120 in-lbs)	2/0-6AWG		CU-AL	130°C	—	•	
	3	LFH601003	CID	—	—		4.5 N-m (40 in-lbs)	8 AWG					
								4.0 N-m (35 in-lbs)					10-14 AWG
200	1	LFH602001	C	—	—	31.1 N-m (275 in-lbs)	250 kcmil-6		CU-AL	130°C	—	—	
	3	LFH602003	C	—	—		250 kcmil-6						
400	1	LFH604001	C	—	—	31.1 N-m (275 in-lbs)	(2) 350 kcmil-1/0		CU-AL	130°C	—	—	
	3	LFH604003	C	—	—		(2) 350 kcmil-1/0						
600	1	LFH606001	C	—	—	42.4 N-m (375 in-lbs)	(2) 500 kcmil-4		CU-AL	130°C	—	—	
	3	LFH606003	C	—	—		(2) 500 kcmil-4						

Note: Reinforcing springs standard on all Class H fuse blocks.

## Ordering Information (Class R 250 V)

AMP RATING	POLES	ORDERING NUMBER			TORQUE	TERMINAL	WIRE RANGE	WIRE TYPE	BASE TEMP RATING	SNAP TO RELEASE	INDICATION	COVER ORDERING NUMBER*	
		BASE ORDERING NUMBER	BOX LUG	SUFFIX PRESSURE PLATE									SCREW
30	1	LFR250301	C	P	S	2.8 N-m (25 in-lbs)	C	6-14 AWG	CU Only	125°C	•	—	
	2	LFR250302	C	P	S		P	10-14 AWG					
	3	LFR250303	C	P	S		S	10-22 AWG					
60	1	LFR250601	CID	—	—	5.6 N-m (50 in-lbs)	2-4 AWG		CU-AL	125°C	•	•	
	2	LFR250602	CID	—	—		2.8 N-m (25 in-lbs)	6-14 AWG					
	3	LFR250603	CID	—	—			6-14 AWG					
100	1	LFR251001	CID	—	—	13.6 N-m (120 in-lbs)	2/0-6 AWG		CU-AL	130°C	—	•	
	3	LFR251003	CID	—	—		4.5 N-m (40 in-lbs)	8 AWG					
								4.0 N-m (35 in-lbs)					10-14 AWG
200	1	LFR252001	C	—	—	31.1 N-m (275 in-lbs)	250 kcmil-6		CU-AL	130°C	—	—	
	3	LFR252003	C	—	—		250 kcmil-6						
400	1	LFR254001	C	—	—	31.1 N-m (275 in-lbs)	(2) 350 kcmil-1/0		CU-AL	130°C	—	—	
	3	LFR254003	C	—	—		(2) 350 kcmil-1/0						
600	1	LFR256001	C	—	—	42.4 N-m (375 in-lbs)	(2) 500 kcmil-4		CU-AL	130°C	—	—	
	3	LFR256003	C	—	—		(2) 500 kcmil-4						

Note: Reinforcing springs standard on all Class R fuse blocks.




## Ordering Information (Class R 600 V)

AMP RATING	POLES	ORDERING NUMBER			TORQUE	TERMINAL	WIRE RANGE	WIRE TYPE	BASE TEMP RATING	SNAP TO RELEASE	INDICATION	COVER ORDERING NUMBER*	
		BASE ORDERING NUMBER	BOX LUG	SUFFIX PRESSURE PLATE									SCREW
30	1	LFR600301	CID	PID	SID	2.8 N-m (25 in-lbs)	C	6-14 AWG	CU Only	130°C	•	•	
	2	LFR600302	CID	PID	SID		P	10-14 AWG					
	3	LFR600303	CID	PID	SID		S	10-22 AWG					
60	1	LFR600601	CID	—	—	5.6 N-m (50 in-lbs)	2-4 AWG		CU-AL	130°C	•	•	
	2	LFR600602	CID	—	—		2.8 N-m (25 in-lbs)	6-14 AWG					
	3	LFR600603	CID	—	—			6-14 AWG					
100	1	LFR601001	CID	—	—	13.6 N-m (120 in-lbs)	2/0-6 AWG		CU-AL	130°C	—	•	
	3	LFR601003	CID	—	—		4.5 N-m (40 in-lbs)	8 AWG					
								4.0 N-m (35 in-lbs)					10-14 AWG
200	1	LFR602001	C	—	—	31.1 N-m (275 in-lbs)	250 kcmil-6		CU-AL	130°C	—	—	
	3	LFR602003	C	—	—		250 kcmil-6						
400	1	LFR604001	C	—	—	31.1 N-m (275 in-lbs)	(2) 350 kcmil-1/0		CU-AL	130°C	—	—	
	3	LFR604003	C	—	—		(2) 350 kcmil-1/0						
600	1	LFR606001	C	—	—	42.4 N-m (375 in-lbs)	(2) 500 kcmil-4		CU-AL	130°C	—	—	
	3	LFR606003	C	—	—		(2) 500 kcmil-4						

Note: Reinforcing springs standard on all Class R fuse blocks. \*Covers sold individually. One cover needed for each pole.

# CLASS H/K5 AND R FUSE BLOCKS


## Dimensions mm (inches)

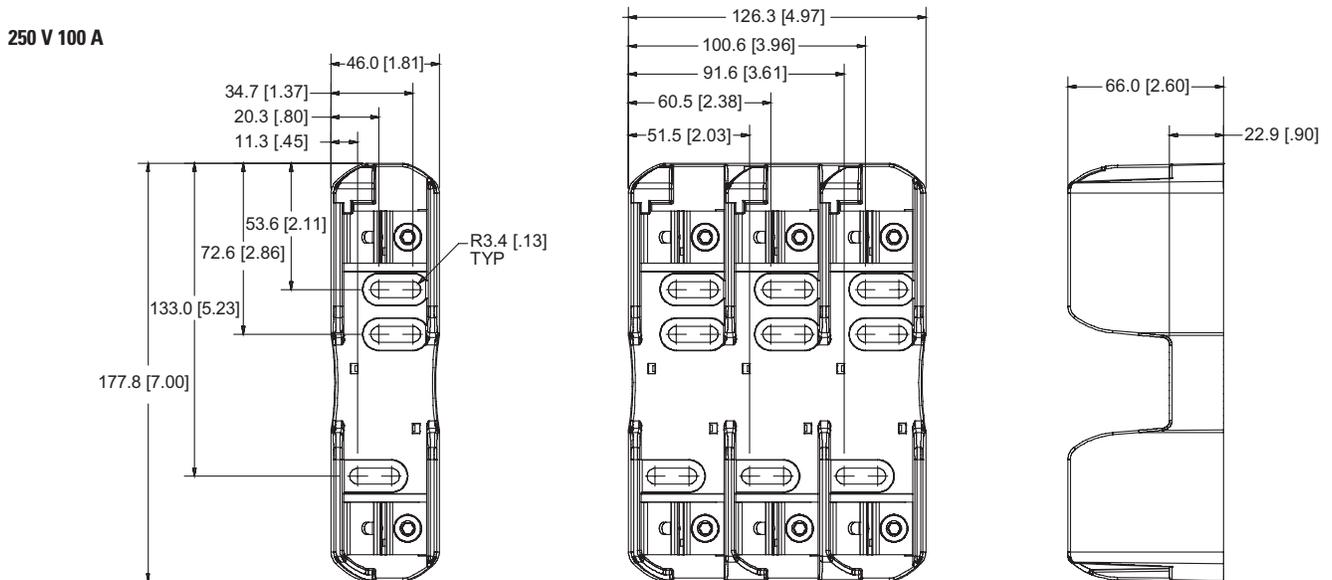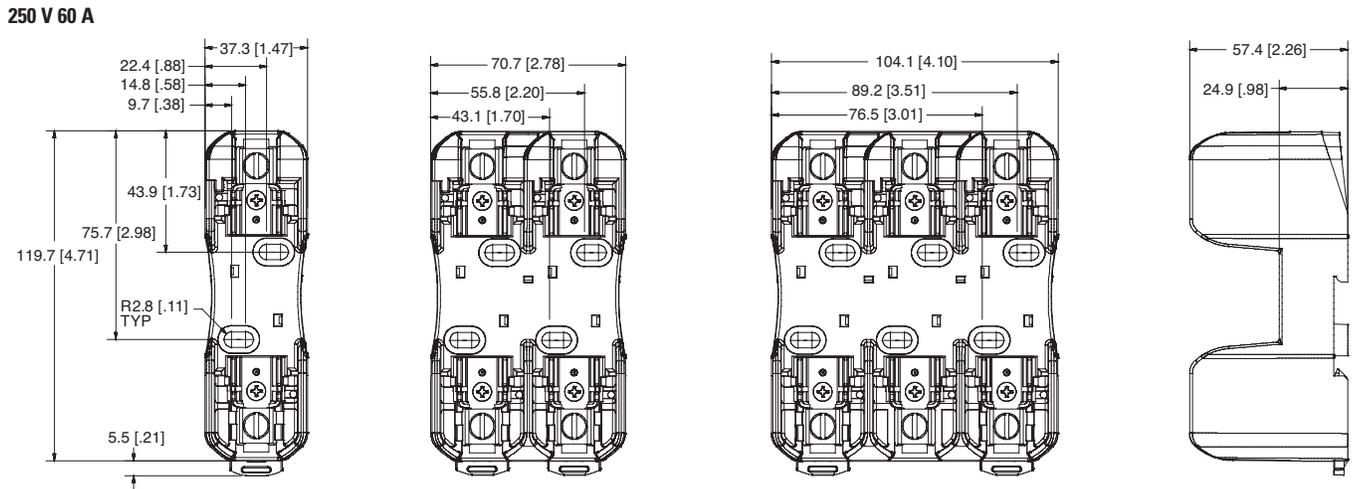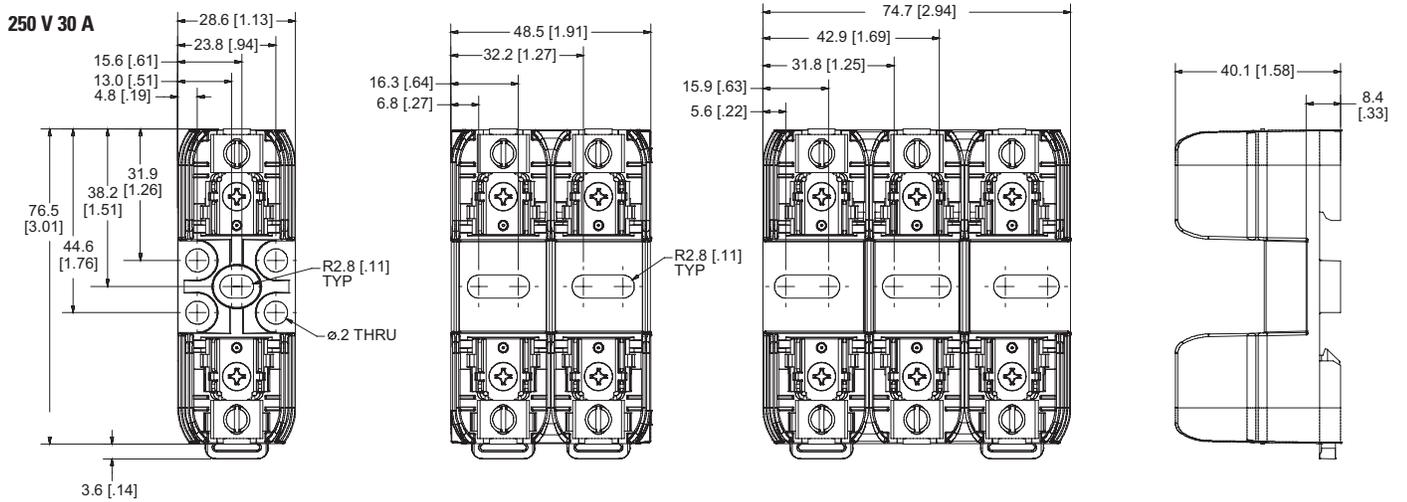


# CLASS H/K5 AND R FUSE BLOCKS

## Dimensions mm (inches)


### 250 V 200 A

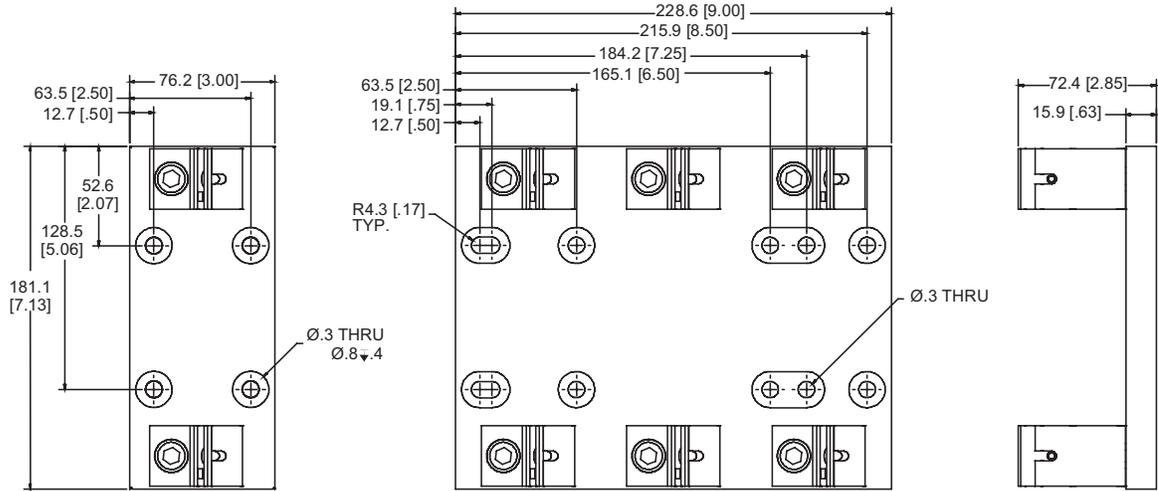

### 250 V 400 A



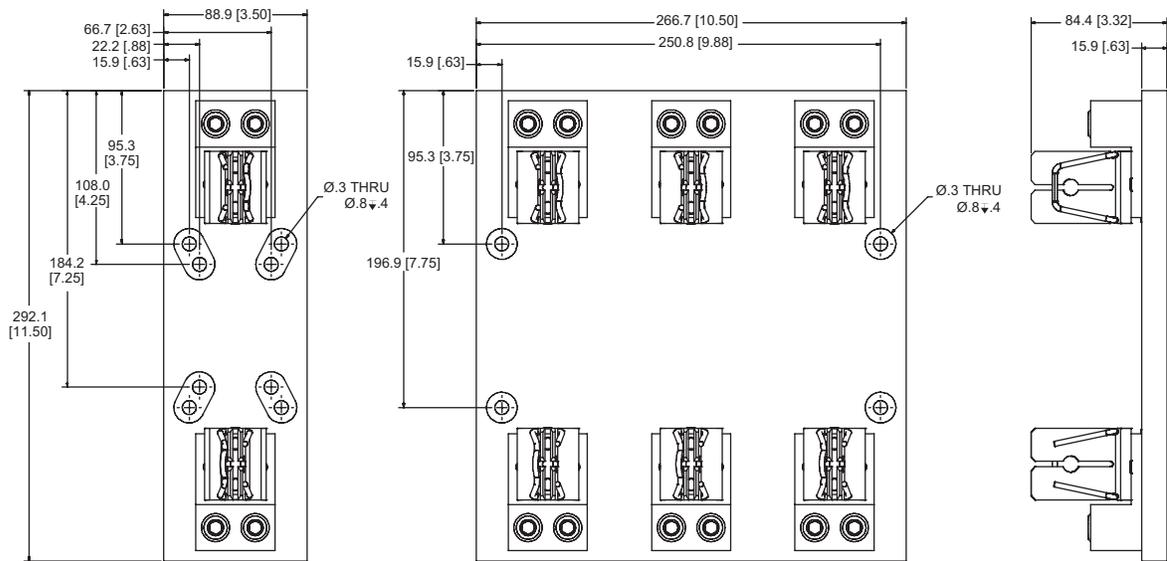


### 250 V 600 A

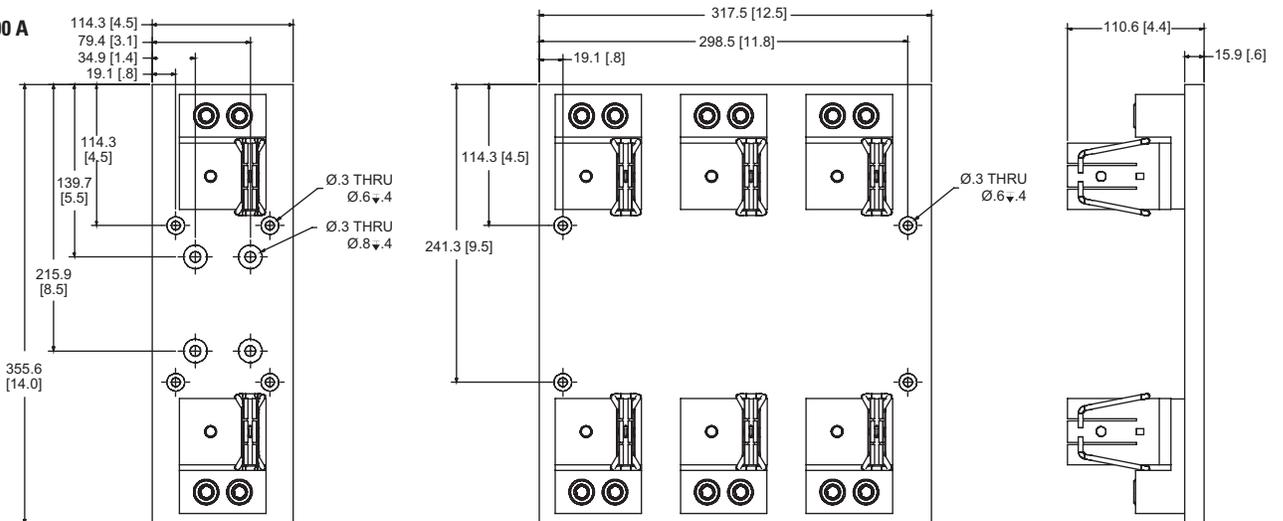

# CLASS H/K5 AND R FUSE BLOCKS


## Dimensions mm (inches)

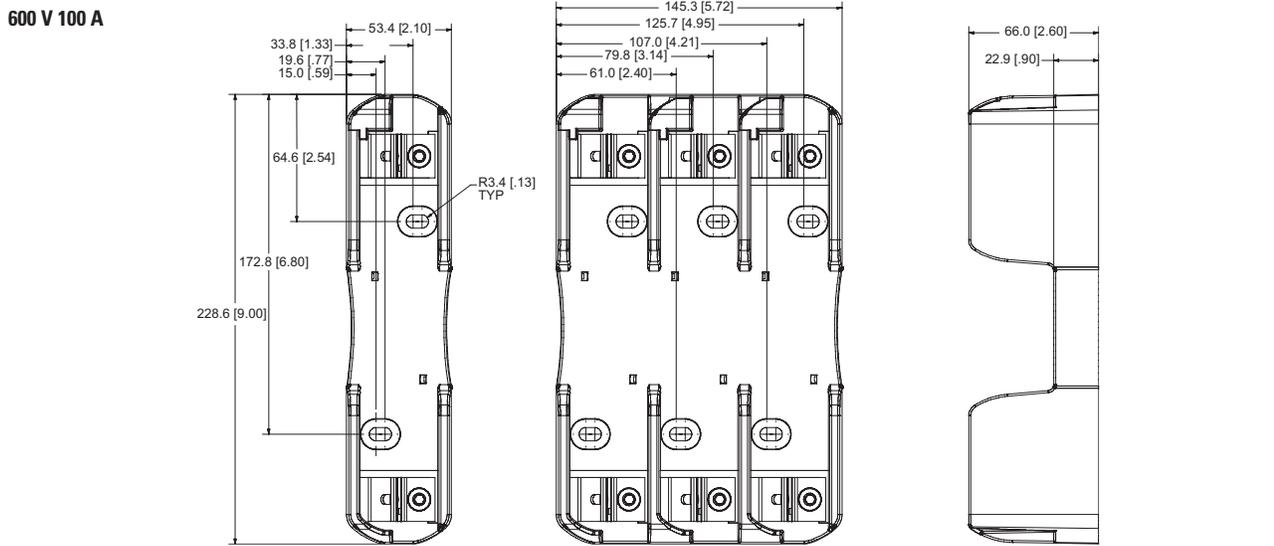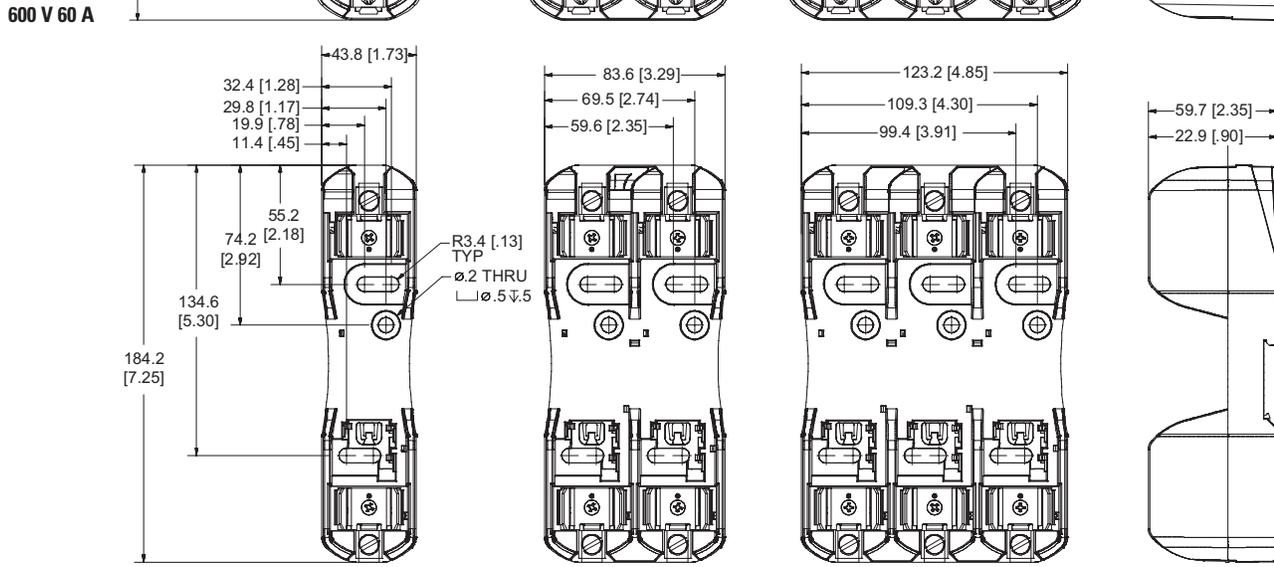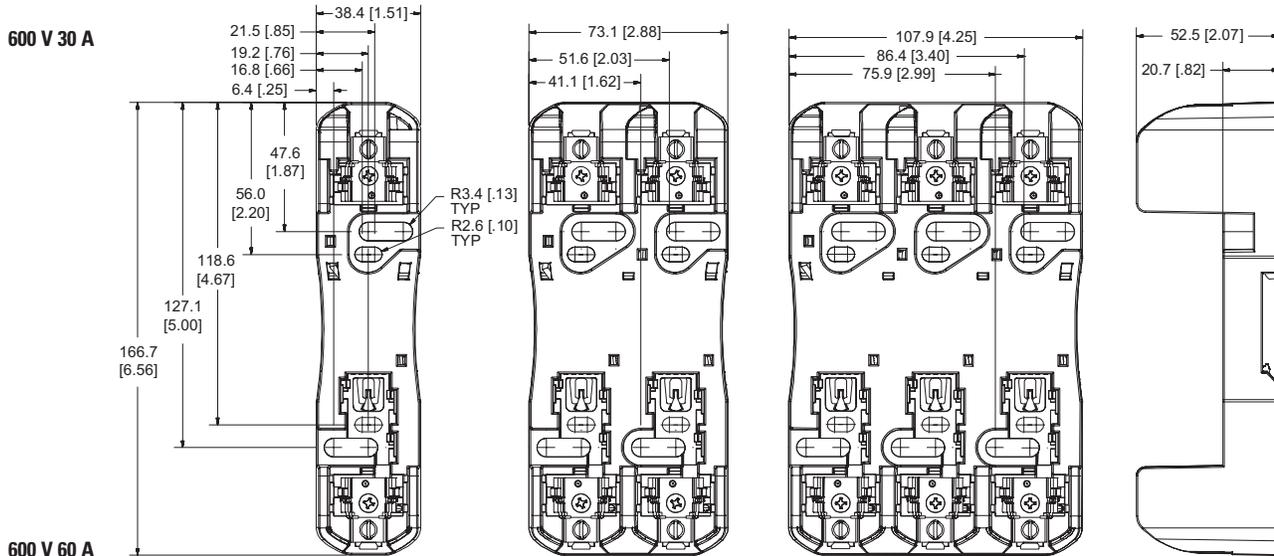


# CLASS H/K5 AND R FUSE BLOCKS

## Dimensions mm (inches)


### 600 V 200 A

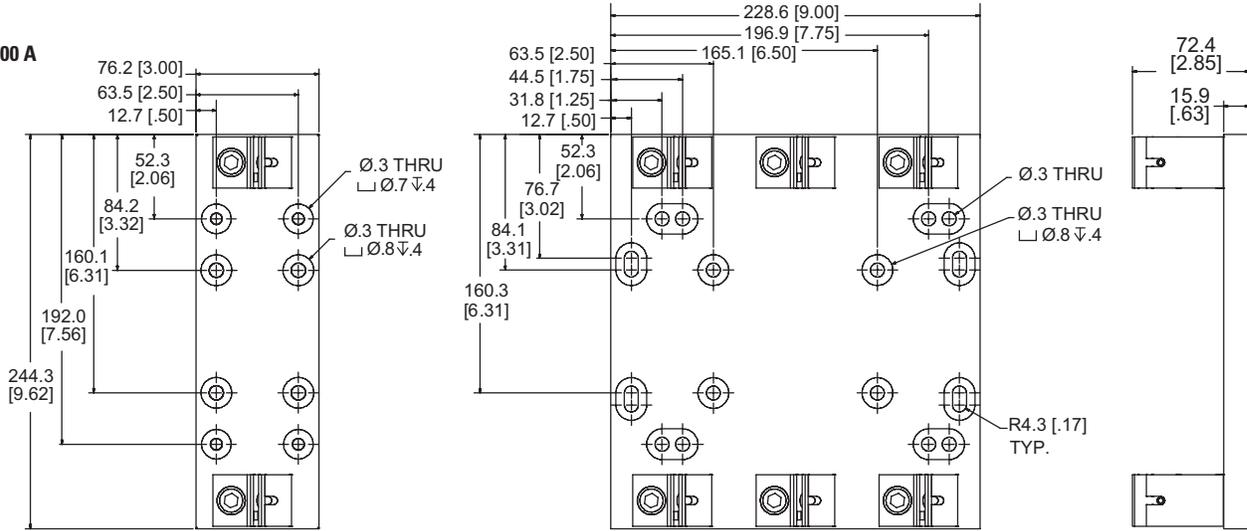

### 600 V 400 A

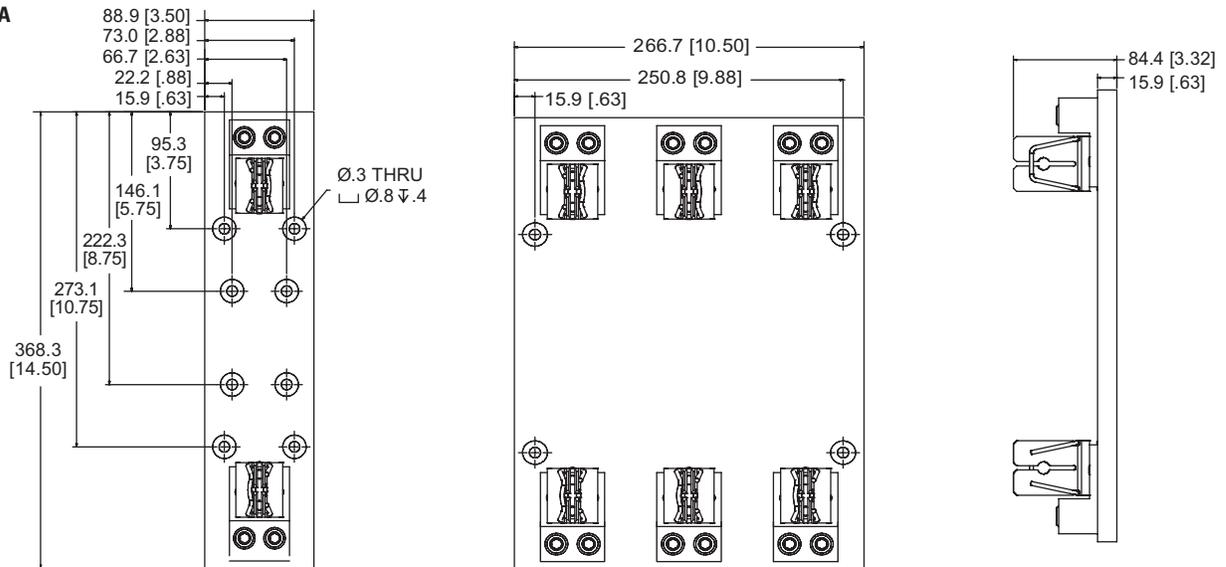

### 600 V 600 A

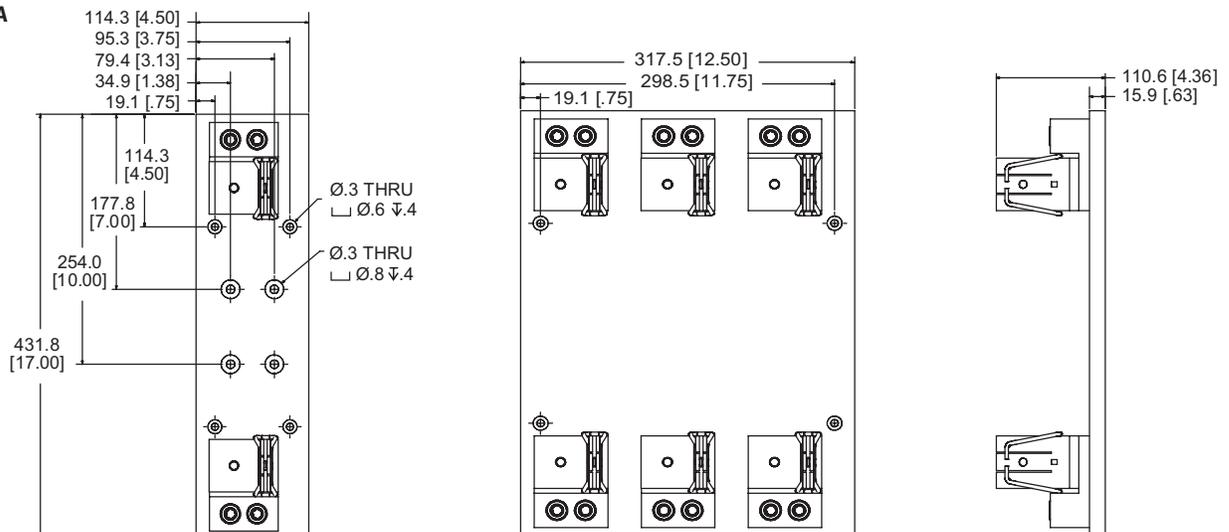

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Littelfuse:

[LFH256003C](#) [LFH250302S](#) [LFH600303SID](#) [LFH250302P](#) [LFH604003C](#) [LFH600303PID](#) [LFR600302CID](#)  
[LFH250302C](#) [LFH600302PID](#) [LFH600301PID](#) [LFH606001C](#) [LFH251001CID](#) [LFH250301S](#) [LFR600301PID](#)  
[LFH600603CID](#) [LFH601003CID](#) [LFH252003C](#) [LFH252001C](#) [LFH606003C](#) [LFH251003CID](#) [LFH250303S](#)  
[LFH250603CID](#) [LFH254001C](#) [LFH250303P](#) [LFH600601CID](#) [LFH604001C](#) [LFH254003C](#) [LFH250301P](#)  
[LFH600302SID](#) [LFH250602CID](#) [LFH601001CID](#) [LFH600303CID](#) [LFH600301SID](#) [LFH250301C](#) [LFH600602CID](#)  
[LFR250302S](#) [LFH256001C](#) [LFH600302CID](#) [LFH602001C](#) [LFH600301CID](#) [LFH250303C](#) [LFH250601CID](#)  
[LFH602003C](#) [LFR250302P](#) [LFR250603CID](#) [LFR600302PID](#) [LFR250601CID](#) [LFR250303C](#) [LFR600303SID](#)  
[LFR604001C](#) [LFR250602CID](#) [LFR604003C](#) [LFR250301S](#) [LFR251001CID](#) [LFR600301SID](#) [LFR252003C](#)  
[LFR606003C](#) [LFR250303S](#) [LFR602003C](#) [LFR600303CID](#) [LFR601001CID](#) [LFR256003C](#) [LFR250302C](#)  
[LFR252001C](#) [LFR251003CID](#) [LFR600301CID](#) [LFR600302SID](#) [LFR254001C](#) [LFR606001C](#) [LFR250301C](#)  
[LFR601003CID](#) [LFR256001C](#) [LFR250301P](#) [LFR600602CID](#) [LFR254003C](#) [LFR600603CID](#) [LFR600601CID](#)  
[LFR602001C](#) [LFR250303P](#) [LFR600303PID](#)