

Customer Information Sheet

DRAWING No.: M22-713XXXX

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

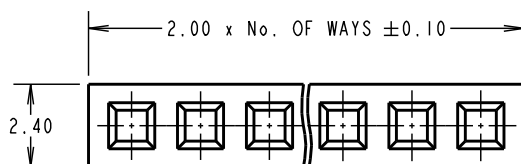

ORDER CODE:

M22-713XXXX

No. OF WAYS _____
03 TO 32

FINISH: _____
42 = SELECTIVE GOLD +
100% TIN (MATT FINISH)

SPECIFICATION:

MATERIAL:

MOULDING - LCP UL94V-0, BLACK

CONTACTS - PHOSPHOR BRONZE

FINISH: (OVER NICKEL)

42 = 1.27µ GOLD ON CONTACT AREA,

2.54µ 100% TIN OVER NICKEL

(MATTE FINISH) ON TAILS

MECHANICAL:

INSERTION FORCE - 2N MAX

WITHDRAWAL FORCE - 0.2N MIN

DURABILITY - 1000 OPERATIONS

ELECTRICAL:

CURRENT RATING - 1A AC/DC

VOLTAGE PROOF - 500V AC MIN

CONTACT RESISTANCE - 20 MILLIOHMS MAX

INSULATION RESISTANCE - 1000 MEGAOHMS MIN

DIELECTRIC WITHSTANDING - 500V AC FOR 1 MIN

ENVIRONMENTAL:

TEMPERATURE RANGE - -40° TO +105°

PACKING:

TUBE

FOR COMPLETE SPECIFICATION SEE COMPONENT

