

Customer Information Sheet

DRAWING No.: M60-616XX45

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)





NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

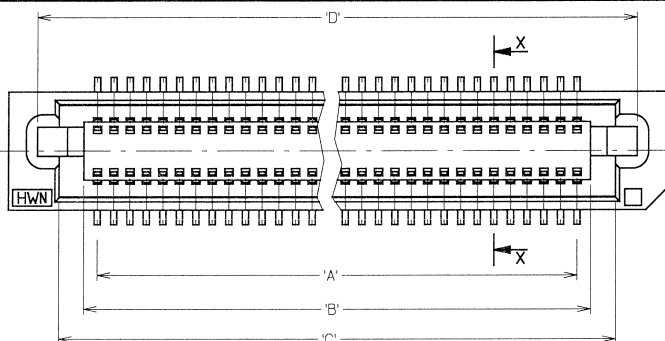

SECTION X-X

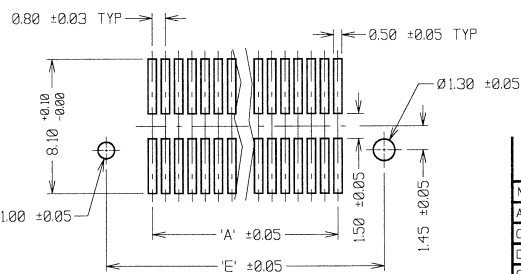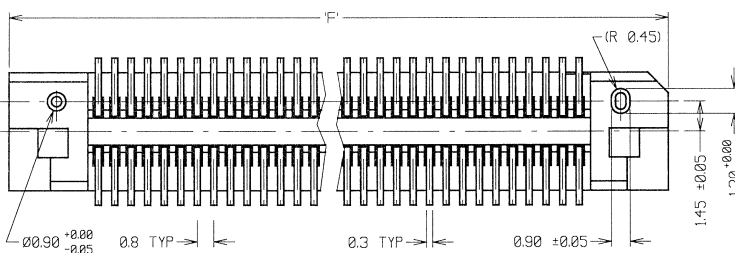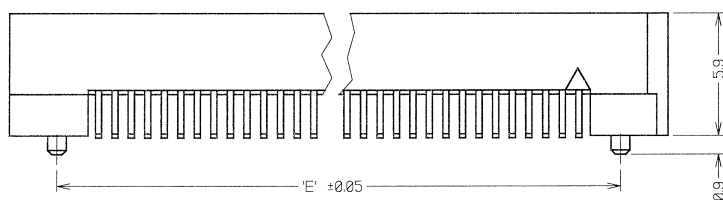

RECOMMENDED PAD LAYOUT

PART No.	No. OF CONTACTS	'A'	'B'	'C'	'D'	'E'	'F'
M60-6161045	10 + 10	7.2	8.5	10.9	13.0	11.2	15.8
M60-6161545	15 + 15	11.2	12.5	14.9	17.0	15.2	19.8
M60-6162045	20 + 20	15.2	16.5	18.9	21.0	19.2	23.8
M60-6162545	25 + 25	19.2	20.5	22.9	25.0	23.2	27.8
M60-6163045	30 + 30	23.2	24.5	26.9	29.0	27.2	31.8
M60-6164045	40 + 40	31.2	32.5	34.9	37.0	35.2	39.8
M60-6165045	50 + 50	39.2	40.5	42.9	45.0	43.2	47.8

SPECIFICATIONS:

MATERIAL:

MOULDING = LCP, UL94V-0

CONTACTS = PHOSPHOR BRONZE

FINISH:

CONTACTS:

0.05µ MIN GOLD OVER 1.27µ MIN NICKEL

0.5µ MIN GOLD ON CONTACT AREA.

ELECTRICAL:

CURRENT RATING = 0.5 AMPS

VOLTAGE RATING = 100V AC

DIELECTRIC WITHSTANDING VOLTAGE = 300V AC (1 MINUTE)

INSULATION RESISTANCE = 1000 MEGOHMS MIN (250V DC)

CONTACT RESISTANCE = 40 MILLIOHMS MAX

MECHANICAL:

DURABILITY = 30 CYCLES

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +100°C

PACKING = TUBE

NOTES:

- MATES WITH M60-604XX45, M60-605XX45 OR M60-606XX45 TO GIVE BOARD-TO-BOARD HEIGHTS OF 7mm, 8mm AND 9mm RESPECTIVELY.
- ALL TOLERANCES ±0.30 UNLESS OTHERWISE STATED.

ORDER CODE:

M60-616XX45

No. OF CONTACTS PER ROW
10, 15, 20, 25, 30, 40, 50

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
misharwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4598
misharwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
misharwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X = ±1mm
X.M = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE:
0.80mm PITCH SMT PLUG
CONNECTOR (6mm HIGH)

DRAWING NUMBER:
M60-616XX45

SHT
2 OF 2

JMB	9	17.07.06	9324
NAME	ISS	DATE	C/NOTE
APPROVED:			
CHECKED:			
DRAWN:	WJ BOURNE		
CUSTOMER REF:			
ASSEMBLY DRG:			