

The following document contains information on Cypress products. Although the document is marked with the name "Spansion", the company that originally developed the specification, Cypress will continue to offer these products to new and existing customers.

Continuity of Specifications

There is no change to this document as a result of offering the device as a Cypress product. Any changes that have been made are the result of normal document improvements and are noted in the document history page, where supported. Future revisions will occur when appropriate, and changes will be noted in a document history page.

Continuity of Ordering Part Numbers

Cypress continues to support existing part numbers. To order these products, please use only the Ordering Part Numbers listed in this document.

For More Information

Please contact your local sales office for additional information about Cypress products and solutions.

About Cypress

Cypress (NASDAQ: CY) delivers high-performance, high-quality solutions at the heart of today's most advanced embedded systems, from automotive, industrial and networking platforms to highly interactive consumer and mobile devices. With a broad, differentiated product portfolio that includes NOR flash memories, F-RAM™ and SRAM, Traveo™ microcontrollers, the industry's only PSoC® programmable system-on-chip solutions, analog and PMIC Power Management ICs, CapSense® capacitive touch-sensing controllers, and Wireless BLE Bluetooth® Low-Energy and USB connectivity solutions, Cypress is committed to providing its customers worldwide with consistent innovation, best-in-class support and exceptional system value.

MB9B420T Series

32-bit Microcontroller FM3 Family

Fact Sheet



MB9B420T Series are highly integrated 32-bit microcontrollers dedicated for embedded controllers with low power consumption mode and competitive cost. MB9B420T Series are based on the ARM Cortex-M3 Processor with Flash memory and SRAM, and has peripheral functions such as various timers, ADCs,DACs and Communication Interfaces.

1. FEATURES

■ 32bit ARM Cortex-M3 Core : Processor version : r2p1

■ Clock: Maximum clock frequency: 60MHz

■ Base Timer: 16 channels (Max.)
■ Multi-function Timer: 1 unit (Max.)

16-bit free-run timer x3channels

Input capture ×4channels

Output compare x6channels

A/D activation compare x2channels

Waveform generator x3channels

- 16-bit PPG timer x3channels

■ QPRC

- MB9BF428S/429S : 1 channel (Max.) - MB9BF428T/429T : 2 channels (Max.)

■ Dual Timer : 1 unit

■ Watch dog Timer: 1 channel (SW) + 1 channel (HW)
■ Multi-function Serial Interface: 16 channels (Max.)

Selectable from UART/CSIO/LIN/I²C

External Bus Interface
 DMA Controller: 8channels
 CAN: 1 channel (Max.)
 Real-Time Clock: 1 unit

■ HDMI-CEC/Remote control: 2 channels (Max.)

■ Watch counter: 1 unit

■ External Interrupt Controller Unit

Up to 32 external interrupt input pins

Include one non-maskable interrupt (NMI)

■ 12-bit A/D Converter : Max. 24 channels (2 units)

■ 10-bit D/A Converter : Max. 2 channels (Max.)

■ CRC Accelerator■ Low Power Mode

- 6 low power consumption modes supported

 SLEEP mode/TIMER mode/RTC mode/Deep standby RTC mode/STOP mode/Deep standby STOP mode

■ General Purpose I/O port: 154 (Max.)

■ Unique ID

■ Built-in CR

■ Debug

- Serial Wire JTAG Debug Port (SWJ-DP)

Embedded Trace Macrocells (ETM)

■ Low Voltage Detector

■ Clock Super Visor

■ **Power Supply** : 2.7 to 5.5V


2. PRODUCT LINEUP

Part number Parameter	MB9BF428S/T	MB9BF429S/T
Flash Main area (Byte)	1M	1.5M
Flash Work area (Byte)	64K	64K
RAM (Byte)	160K	192K

3. ORDERING INFORMATION

Part number	Package	
MB9BF428SPMC	Plastic • LQFP(0.5mm pitch),144-pin	
MB9BF429SPMC	(FPT-144P-M08)	
MB9BF428TPMC	Plastic • LQFP(0.5mm pitch),176-pin (FPT-176P-M07)	
MB9BF429TPMC		
MB9BF428TBGL	Plastic • BGA(0.8mm pitch),192-pin (BGA-192P-M06)	
MB9BF429TBGL		


4. PACKAGE EXAMPLE OF REFERENCE



Plastic · LQFP、176-pins (FPT-176P-M07)



5. BLOCK DIAGRAM

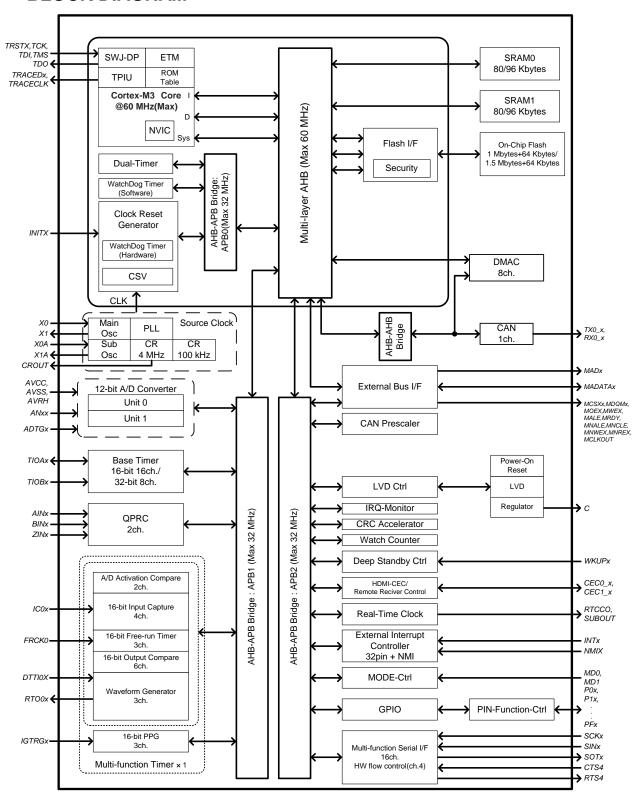

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cypress Semiconductor:

MB9BF428SPMC-GE1 MB9BF429SPMC-GE1 MB9BF429TPMC-GE1 MB9BF428TBGL-GE1 MB9BF428TPMC-GE1 MB9BF429TBGL-GE1