

3 POSITION LATCHED WIRE-TO-WIRE CONNECTOR

Compact Connector with Modular Technology

TE Connectivity (TE) introduces the 3 position latched wire-to-wire connector. This connector utilizes poke-in termination which supports easy field installation as no tools are required. The compact design makes this connector ideal for applications where space is a constraint. Suitable for indoor lighting applications, this connector comes in four different colors enabling ease of identification and assembly.



Applications

- Indoor lighting

Electrical

- Current rating:
 - 16 AWG: UL2459 @ 600V 5A; UL1977 @ 600V - 8A
 - 18AWG: UL2459 @ 600V 5A; UL1977 @ 600V - 8A
 - 22AWG: UL2459 @ 600V 3A; UL1977 @ 600V - 3A
- Voltage rating: 600 VAC Max.
- Dielectric strength: 2200 VAC

Mechanical

- Operating Temperature: -40°C to +105°C
- Durability: 10 cycles

Specifications

- Application Specification: [114-137160](#)
- Product Specification: [108-137160](#)
- UL1977 Approval E28476
- UL2459 Approval E308110
- Multi-pole Splicing Wire Connectors
- Multi-pole Splicing Wire Connectors Certified for Canada

Materials

- Housing: PA, UL 94 V-0
- Contact: Copper Alloy with Tin plating

Key Benefits

- Modular Technology enables flexibility in design
- Tool free, easy and fast installation with poke in contact feature
- Compact size design for space saving
- Color configurations enables easy identification
- Ground PIN with make-first break-last (MFBL)
- Support for hot plug (UL2459) abnormal overload test

Colors


- Black
- Orange
- Red
- Natural

Product Selection Information

Type	Description	Color	Part Number
	Plug	Natural	2834054-1
	Receptacle	Natural	2834055-1
	Plug	Black	2834054-2
	Receptacle	Black	2834055-2
	Plug	Orange	2834054-3
	Receptacle	Orange	2834055-3
	Plug	Red	2834054-4
	Receptacle	Red	2834055-4

Type	Description	Color	Part Number
	Modular Receptacle	Natural	1-2834055-1
	Modular Receptacle	Black	1-2834055-2
	Modular Receptacle	Orange	1-2834055-3
	Modular Receptacle	Red	1-2834055-4

Dimensions

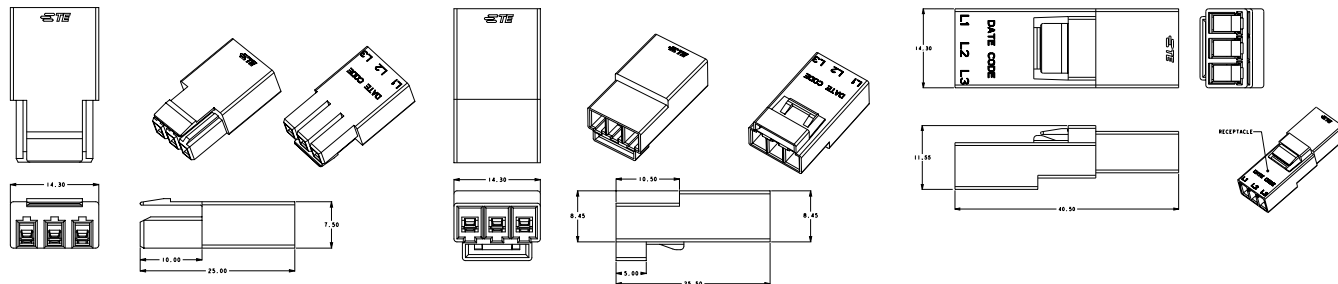

te.com

© 2016 TE Connectivity Ltd. Family of Companies. All Rights Reserved. TE, TE Connectivity, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners.
1-1773886-5 JN 10/2016

USA: +1 (800) 522-6752
Canada: +1 (905) 475-6222
Mexico: +52 (0) 55-1106-0800
Latin/S. America: +54 (0) 11-4733-2200
Germany: +49 (0) 6251-133-1999

UK: +44 (0) 800-267666
France: +33 (0) 1-3420-8686
The Netherlands: +31 (0) 73-6246-999
China: +86 (0) 400-820-6015

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[2834056-2](#) [2834054-2](#) [2834055-1](#) [2834056-1](#) [1-2834055-2](#) [2834055-2](#) [2834055-4](#) [1-2834055-4](#) [2834056-3](#) [1-2834055-3](#) [2834054-4](#) [2834055-3](#) [2834054-1](#) [1-2834055-1](#) [2834054-3](#) [2834056-4](#)