

HIGH ISOLATION VOLTAGE
SSOP PHOTOCOUPLED

-NEPOC Series-

DESCRIPTION

The PS2801-1 and PS2801-4 are optically coupled isolators containing a GaAs light emitting diode and an NPN silicon phototransistor in a plastic SSOP for high density applications.


This package has shield effect to cut off ambient light.

FEATURES

- High isolation voltage ($BV = 2500$ Vr.m.s.)
- Small and thin package (4, 16-pin SSOP, Pin pitch 1.27 mm)
- High collector to emitter voltage ($V_{CEO} = 80$ V)
- High-speed switching ($t_r = 3 \mu s$ TYP., $t_f = 5 \mu s$ TYP.)
- Ordering number of tape product: PS2801-1-F3, F4, PS2801-4-F3, F4
- ★ • Pb-Free product
- ★ • Safety standards: PS2801-1, -4
 - UL approved: File No. E72422
 - BSI approved: No. 8188, 8189
 - DIN EN60747-5-2 (VDE0884 Part2) approved (Option)


APPLICATIONS

- Programmable logic controllers
- Measuring instruments
- Power supply
- Hybrid IC

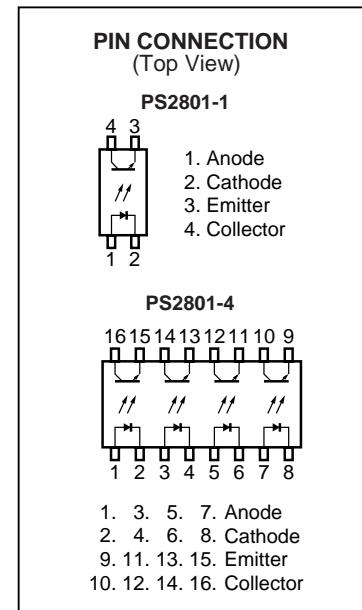


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

PACKAGE DIMENSIONS (UNIT: mm)

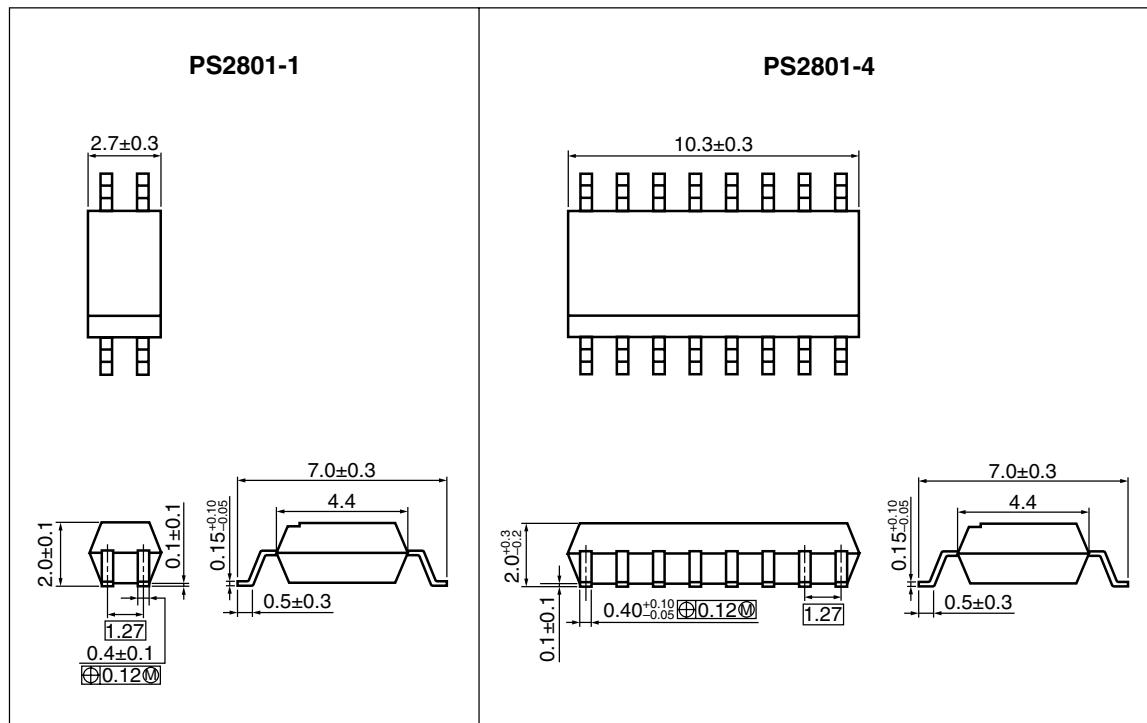

★ MARKING EXAMPLE

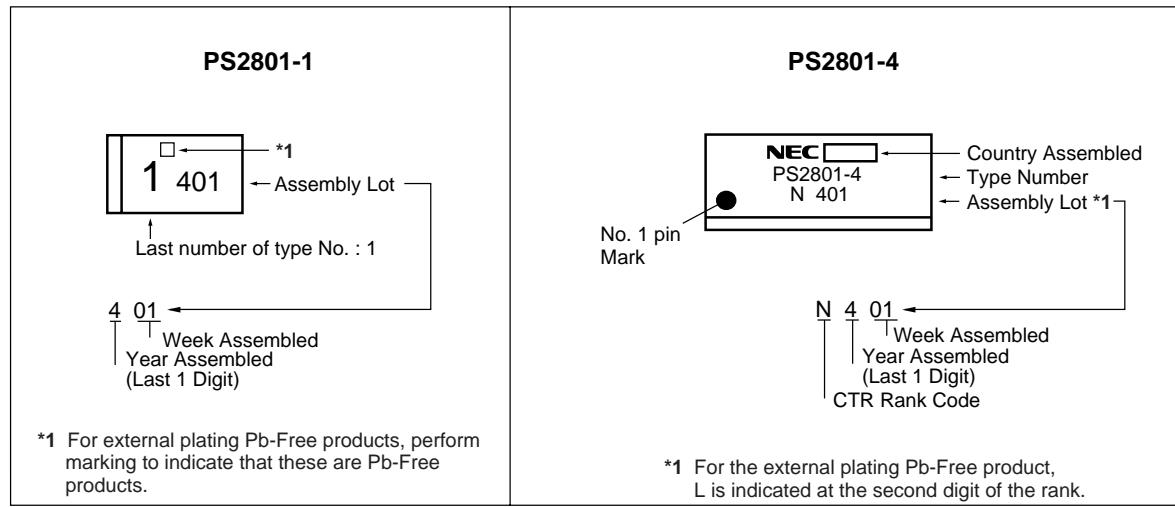

★ ORDERING INFORMATION

Part Number	Order Number	Solder Plating Specification	Packing Style	Safety Standard Approval	Application Part Number ^{*1}	
PS2801-1	PS2801-1	Solder contains lead	50 pcs (Tape 50 pcs cut)	Standard products (UL approved)	PS2801-1	
PS2801-1-F3	PS2801-1-F3		Embossed Tape 3 500 pcs/reel			
PS2801-1-F4	PS2801-1-F4		50 pcs (Tape 50 pcs cut)	DIN EN60747-5-2 (VDE0884 Part2) Approved (Option)		
PS2801-1-V	PS2801-1-V		Embossed Tape 3 500 pcs/reel			
PS2801-1-V-F3	PS2801-1-V-F3		Magazine Case 45 pcs	Standard products (UL approved)		
PS2801-1-V-F4	PS2801-1-V-F4		Embossed Tape 2 500 pcs/reel			
PS2801-4	PS2801-4		Magazine Case 45 pcs	DIN EN60747-5-2 (VDE0884 Part2) Approved (Option)		
PS2801-4-F3	PS2801-4-F3		Embossed Tape 2 500 pcs/reel			
PS2801-4-F4	PS2801-4-F4		Magazine Case 45 pcs			
PS2801-4-V	PS2801-4-V		Embossed Tape 2 500 pcs/reel			
PS2801-4-V-F3	PS2801-4-V-F3	Pb-Free	50 pcs (Tape 50 pcs cut)	Standard products (UL approved)	PS2801-4	
PS2801-4-V-F4	PS2801-4-V-F4		Embossed Tape 3 500 pcs/reel			
PS2801-1	PS2801-1-A		50 pcs (Tape 50 pcs cut)	DIN EN60747-5-2 (VDE0884 Part2) Approved (Option)		
PS2801-1-F3	PS2801-1-F3-A		Embossed Tape 3 500 pcs/reel			
PS2801-1-F4	PS2801-1-F4-A		Magazine Case 45 pcs			
PS2801-1-V	PS2801-1-V-A		Embossed Tape 2 500 pcs/reel	Standard products (UL approved)		
PS2801-1-V-F3	PS2801-1-V-F3-A		Magazine Case 45 pcs			
PS2801-1-V-F4	PS2801-1-V-F4-A		Embossed Tape 2 500 pcs/reel			
PS2801-4	PS2801-4-A		Magazine Case 45 pcs	DIN EN60747-5-2 (VDE0884 Part2) Approved (Option)		
PS2801-4-F3	PS2801-4-F3-A		Embossed Tape 2 500 pcs/reel			
PS2801-4-F4	PS2801-4-F4-A		Magazine Case 45 pcs			
PS2801-4-V	PS2801-4-V-A		Embossed Tape 2 500 pcs/reel			
PS2801-4-V-F3	PS2801-4-V-F3-A		Magazine Case 45 pcs	Approved (Option)		
PS2801-4-V-F4	PS2801-4-V-F4-A		Embossed Tape 2 500 pcs/reel			

*1 For the application of the Safety Standard, following part number should be used.

ABSOLUTE MAXIMUM RATINGS (Unless otherwise specified, $T_A = 25^\circ\text{C}$)

Parameter		Symbol	Ratings		Unit
			PS2801-1	PS2801-4	
Diode	Forward Current (DC)	I_F	50		mA
	Reverse Voltage	V_R	6		V
	Power Dissipation Derating	$\Delta P_D/\text{°C}$	0.6	0.8	$\text{mW}/\text{°C}$
	Power Dissipation	P_D	60	80	mW/ch
	Peak Forward Current ¹	I_{FP}	1		A
Transistor	Collector to Emitter Voltage	V_{CEO}	80		V
	Emitter to Collector Voltage	V_{ECO}	6		V
	Collector Current	I_C	50		mA/ch
	Power Dissipation Derating	$\Delta P_C/\text{°C}$	1.2		$\text{mW}/\text{°C}$
	Power Dissipation	P_C	120		mW/ch
Isolation Voltage ²		BV	2 500		Vr.m.s.
Operating Ambient Temperature		T_A	-55 to +100		$^\circ\text{C}$
Storage Temperature		T_{stg}	-55 to +150		$^\circ\text{C}$

¹ $PW = 100 \mu\text{s}$, Duty Cycle = 1%

² AC voltage for 1 minute at $T_A = 25^\circ\text{C}$, RH = 60% between input and output.

Pins 1-2 shorted together, 3-4 shorted together (PS2801-1).

Pins 1-8 shorted together, 9-16 shorted together (PS2801-4).

ELECTRICAL CHARACTERISTICS (TA = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Diode	Forward Voltage	V _F	I _F = 5 mA		1.1	1.4	V
	Reverse Current	I _R	V _R = 5 V			5	μA
	Terminal Capacitance	C _t	V = 0 V, f = 1.0 MHz		15		pF
Transistor	Collector to Emitter Dark Current	I _{CEO}	V _{CE} = 80 V, I _F = 0 mA			100	nA
Coupled	Current Transfer Ratio (I _c /I _F) ^{*1}	CTR	I _F = 5 mA, V _{CE} = 5 V	80		600	%
	Collector Saturation Voltage	V _{CE(sat)}	I _F = 10 mA, I _c = 2 mA			0.3	V
	Isolation Resistance	R _{i-o}	V _{i-o} = 1.0 kV _{DC}	10 ¹¹			Ω
	Isolation Capacitance	C _{i-o}	V = 0 V, f = 1.0 MHz		0.4		pF
	Rise Time ^{*2}	t _r	V _{CC} = 5 V, I _c = 2 mA, R _L = 100 Ω		3		μs
	Fall Time ^{*2}	t _f			5		

*1 CTR rank (PS2801-1 only)


K : 300 to 600 (%)







P : 150 to 300 (%)

L : 100 to 300 (%)







N : 80 to 600 (%)

*2 Test circuit for switching time

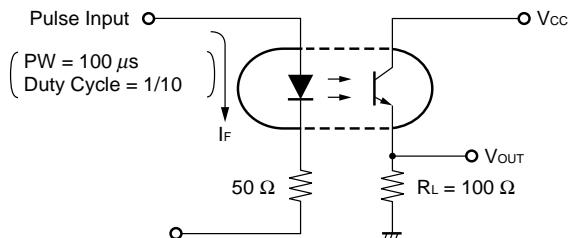

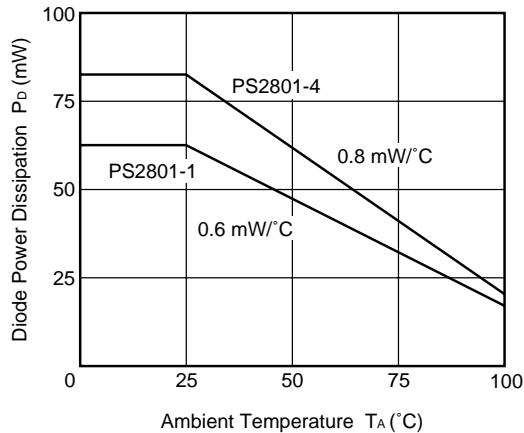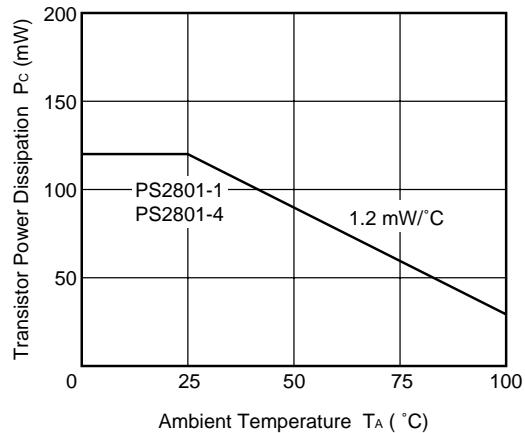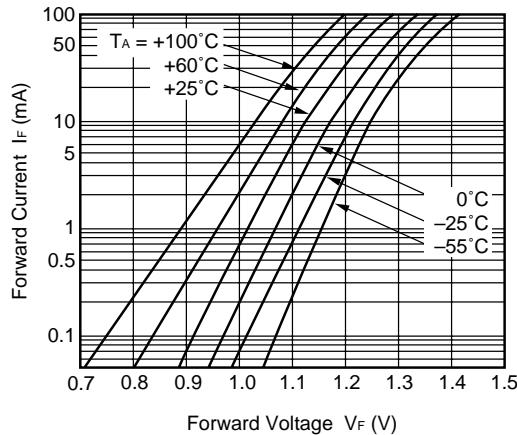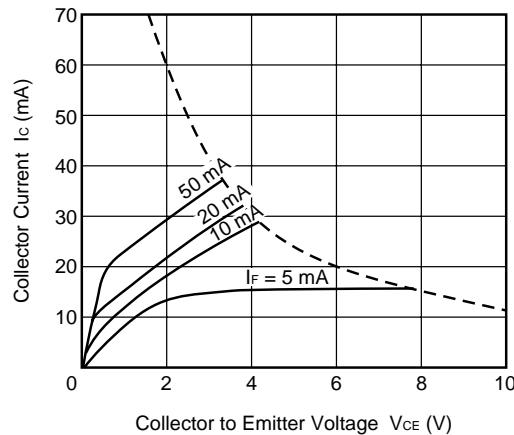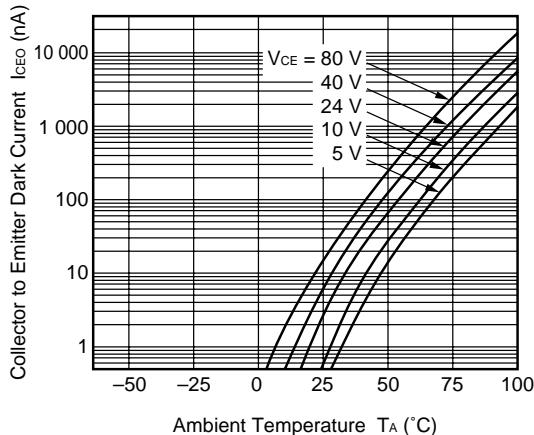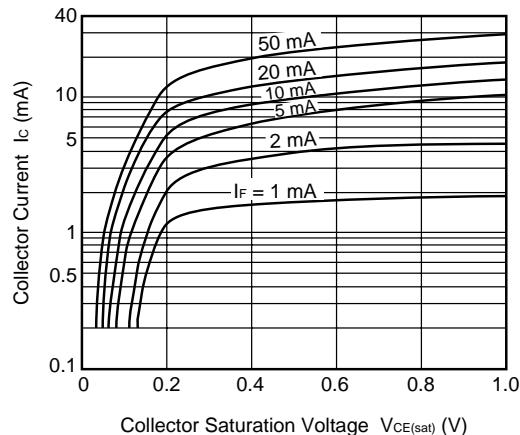
TYPICAL CHARACTERISTICS (Unless otherwise specified, $T_A = 25^\circ\text{C}$)DIODE POWER DISSIPATION vs.
AMBIENT TEMPERATURETRANSISTOR POWER DISSIPATION
vs. AMBIENT TEMPERATUREFORWARD CURRENT vs.
FORWARD VOLTAGECOLLECTOR CURRENT vs.
COLLECTOR TO EMITTER VOLTAGECOLLECTOR TO EMITTER DARK
CURRENT vs. AMBIENT TEMPERATURECOLLECTOR CURRENT vs.
COLLECTOR SATURATION VOLTAGE

Remark The graphs indicate nominal characteristics.

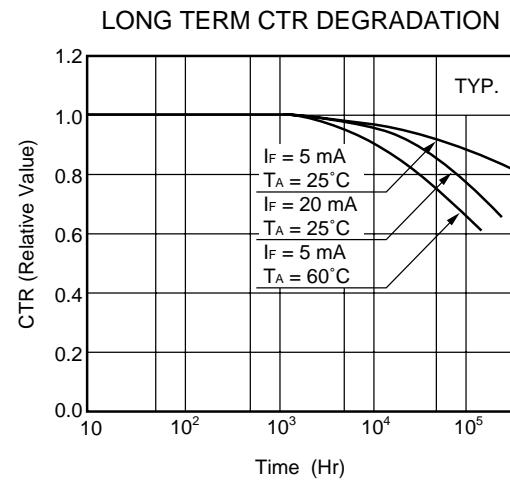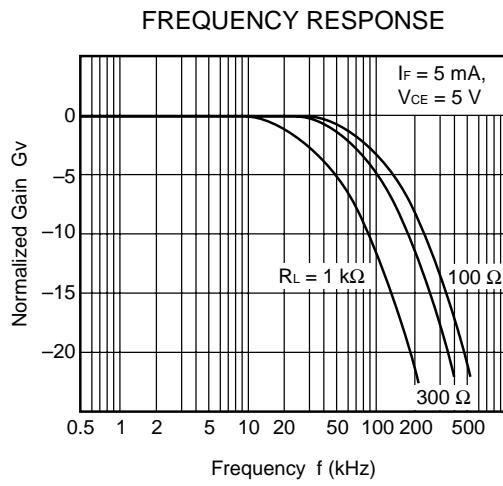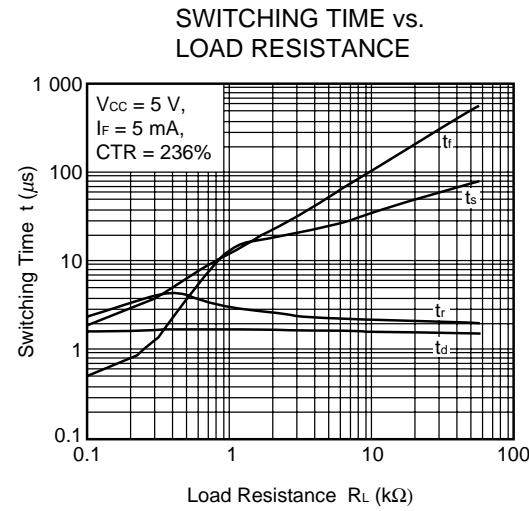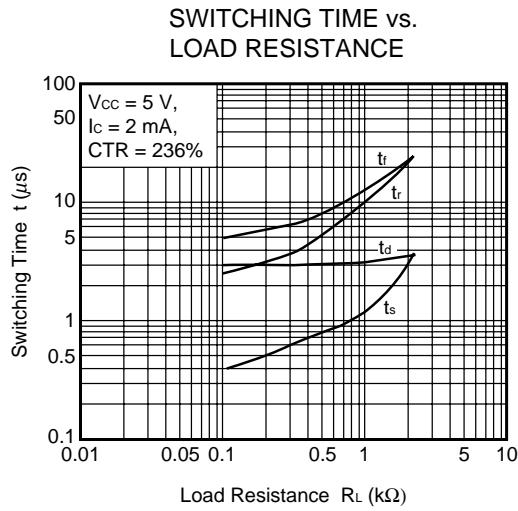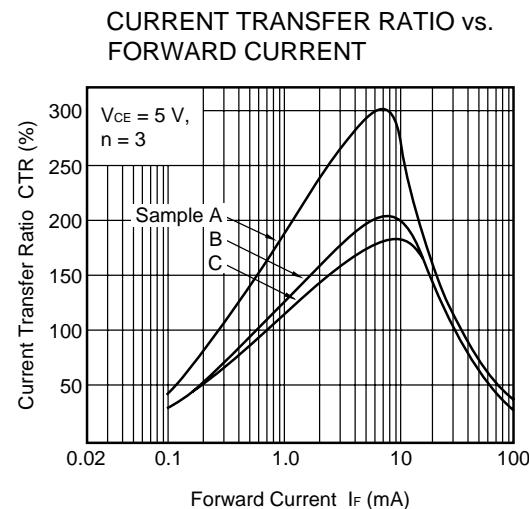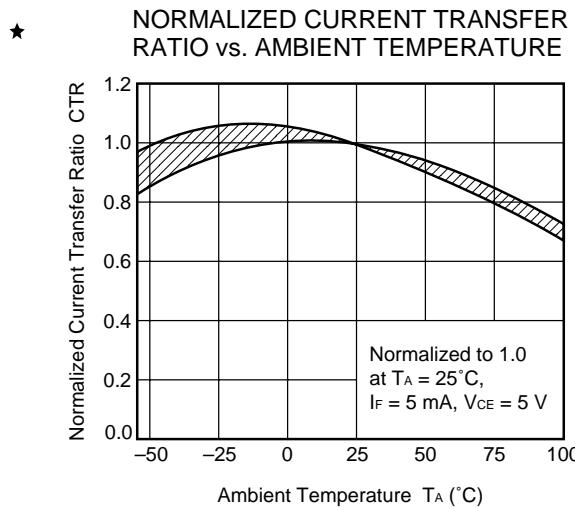


Remark The graphs indicate nominal characteristics.


TAPING SPECIFICATIONS (UNIT: mm)

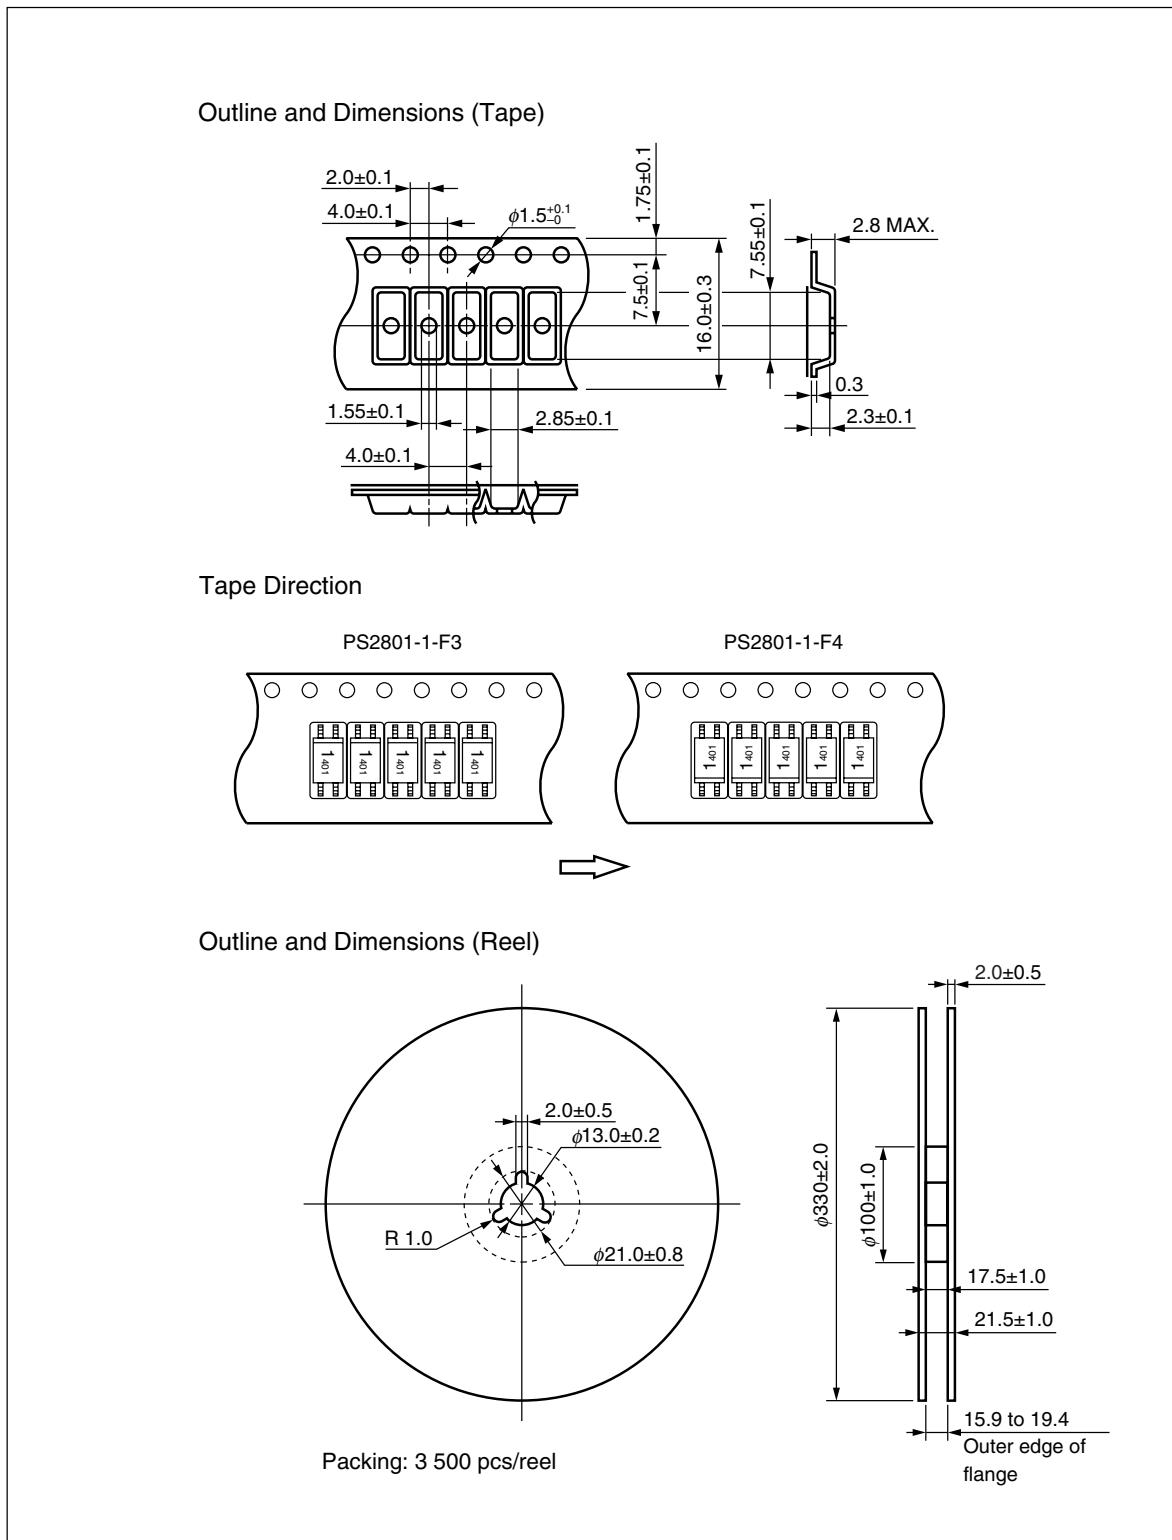


Outline and Dimensions (Tape)

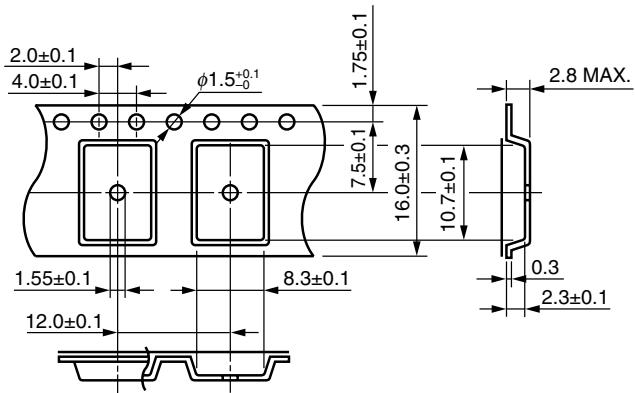

Tape Direction

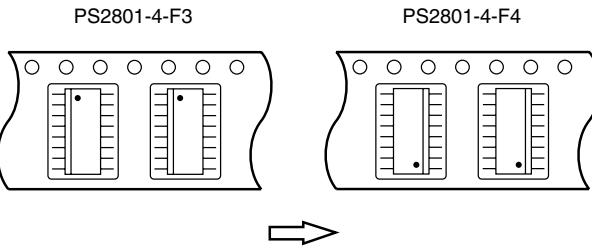

Outline and Dimensions (Reel)

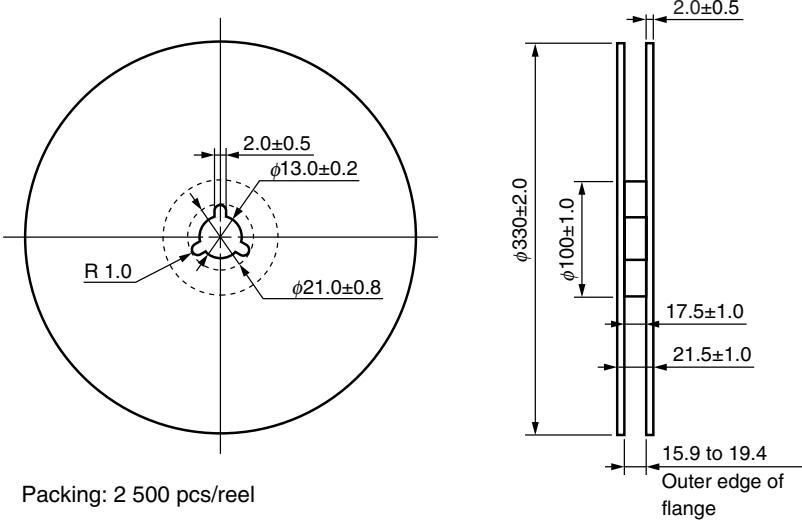


★ NOTES ON HANDLING

1. Recommended soldering conditions

(1) Infrared reflow soldering

• Peak reflow temperature	260°C or below (package surface temperature)
• Time of peak reflow temperature	10 seconds or less
• Time of temperature higher than 220°C	60 seconds or less
• Time to preheat temperature from 120 to 180°C	120±30 s
• Number of reflows	Three
• Flux	Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

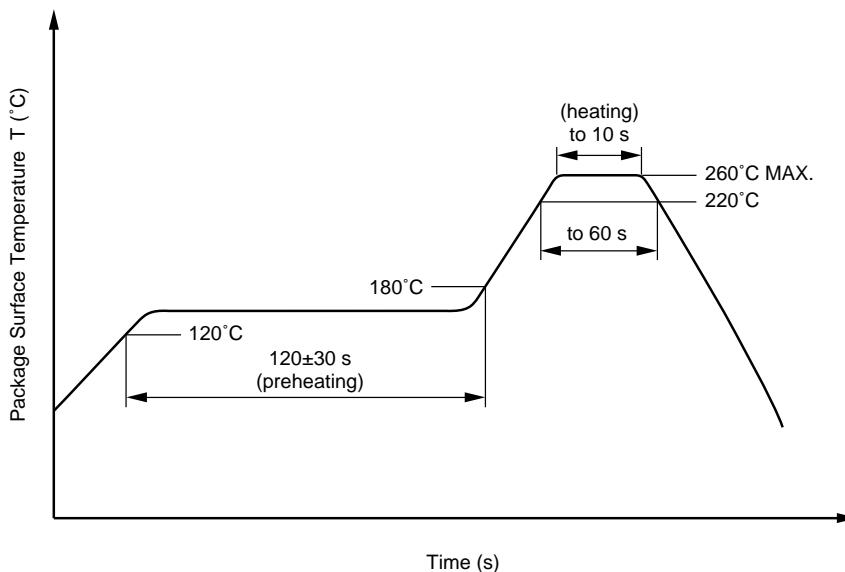

(2) Wave soldering

• Temperature	260°C or below (molten solder temperature)
• Time	10 seconds or less
• Preheating conditions	120°C or below (package surface temperature)
• Number of times	One (Allowed to be dipped in solder including plastic mold portion.)
• Flux	Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(3) Soldering by soldering iron

• Peak temperature (lead part temperature)	350°C or below
• Time (each pins)	3 seconds or less
• Flux	Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead.

(b) Please be sure that the temperature of the package would not be heated over 100°C.

(4) Cautions

• Fluxes

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

2. Cautions regarding noise


Be aware that when voltage is applied suddenly between the photocoupler's input and output or between collector-emitters at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.

USAGE CAUTIONS

1. Protect against static electricity when handling.
2. Avoid storage at a high temperature and high humidity.

PROGRAMMABLE LOGIC CONTROLLERS EXAMPLE

Purpose: In-out interface

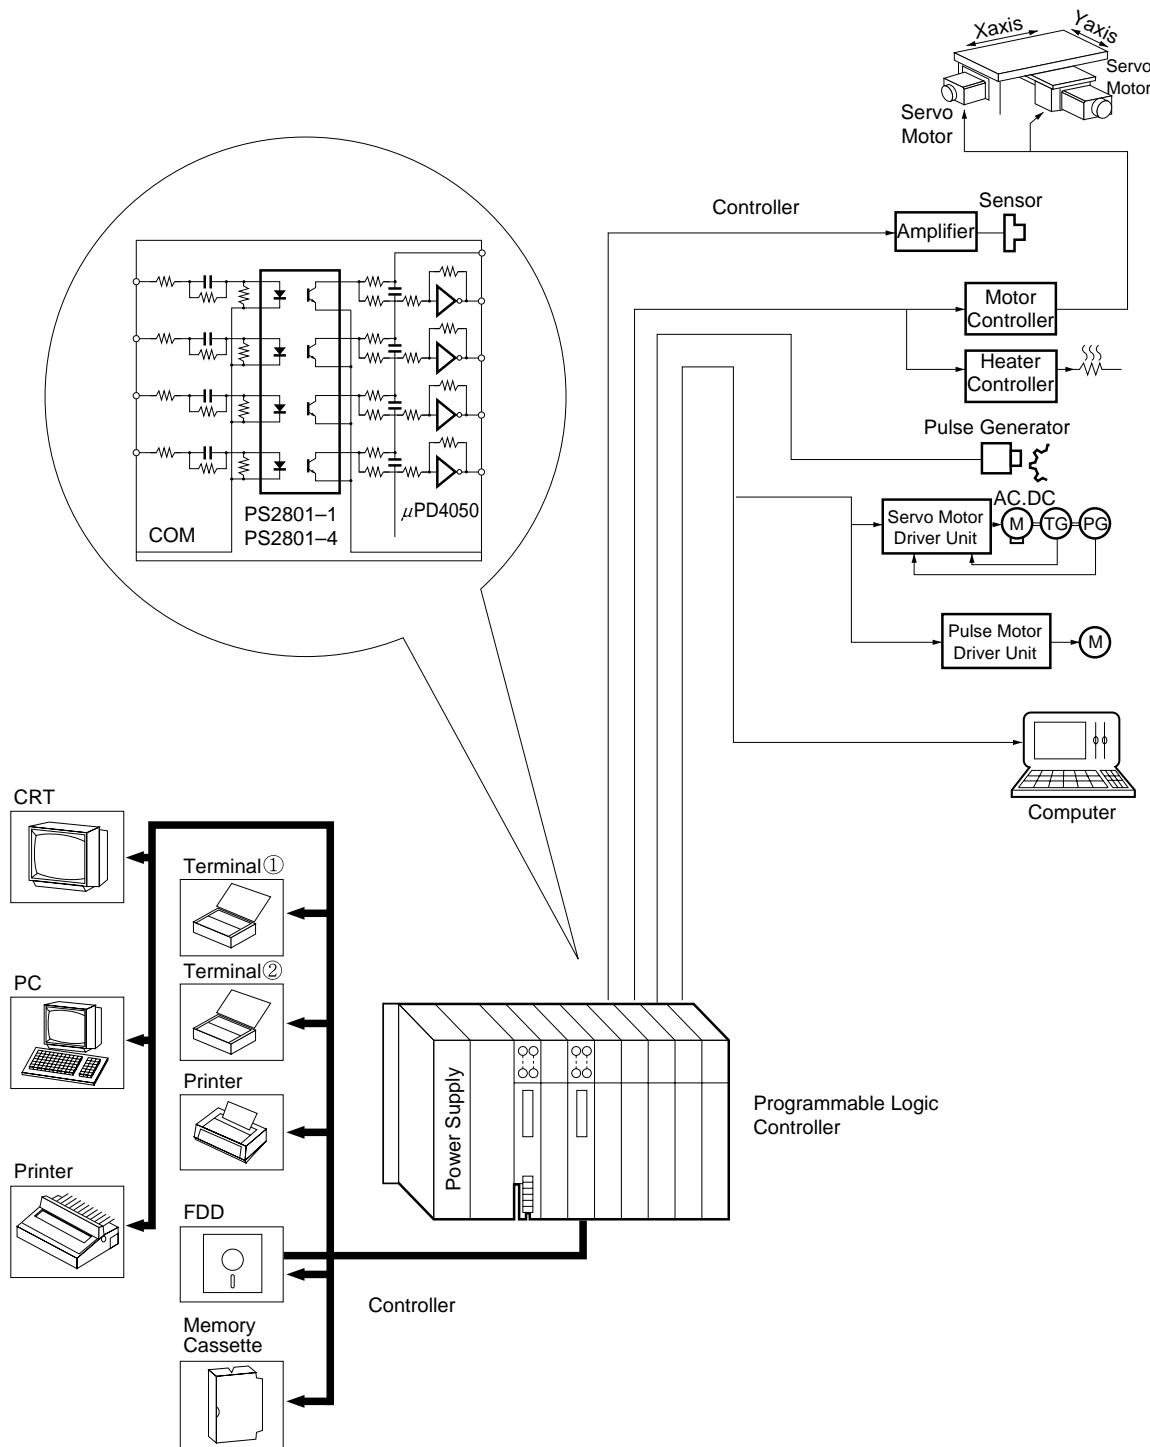

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix -A indicates that the device is Pb-free. The -AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL's understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)	Concentration contained in CEL devices	
Lead (Pb)	< 1000 PPM	-A	-AZ
		Not Detected	(*)
Mercury	< 1000 PPM	Not Detected	
Cadmium	< 100 PPM	Not Detected	
Hexavalent Chromium	< 1000 PPM	Not Detected	
PBB	< 1000 PPM	Not Detected	
PBDE	< 1000 PPM	Not Detected	

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL's liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.