




Low Capacitance TRANSZORB® Transient Voltage Suppressors

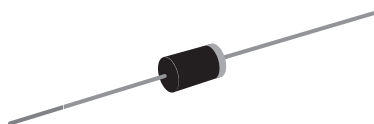

DO-204AC (DO-15)

FEATURES

- Glass passivated chip junction
- Excellent clamping capability
- 500 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle): 0.01 %
- Very fast response time
- Low incremental surge resistance
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

RoHS
COMPLIANT

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial and telecommunication.

PRIMARY CHARACTERISTICS

V_{WM}	5.0 V to 50 V
P_{PPM}	500 W
P_D	3.0 W
T_J max.	175 °C

MECHANICAL DATA

Case: DO-204AC, molded epoxy over passivated body
Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test

Polarity: Color band denotes TVS cathode end

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Peak pulse power dissipation with a 10/1000 μ s waveform ⁽¹⁾	P_{PPM}	500	W
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 2)	P_D	3.0	W
Peak pulse power surge current with a 10/1000 μ s waveform (Fig. 3) ⁽¹⁾	I_{PPM}	See next table	A
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 175	°C

Note:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2

SAC5.0 thru SAC50

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PART NUMBER	STAND-OFF VOLTAGE V_{WM} (V)	MINIMUM BREAKDOWN VOLTAGE AT $I_T = 1.0\text{ mA}$ V_{BR} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA)	MAXIMUM CLAMPING VOLTAGE AT $I_{PP} = 5.0\text{ A}$ V_C (V)	MAXIMUM PEAK PULSE CURRENT PER FIG. 3 I_{PP} (A)	MAXIMUM JUNCTION CAPACITANCE AT 0 VOLTS (pF)	WORKING INVERSE BLOCKING VOLTAGE V_{WIB} (V)	INVERSE BLOCKING LEAKAGE CURRENT $V_{WIB} I_{IB}$ (mA)	PEAK INVERSE BLOCKING VOLTAGE V_{PIB} (V)
SAC5.0	5	7.60	300	10.0	44	50	75	1.0	100
SAC6.0	6	7.90	300	11.2	41	50	75	1.0	100
SAC7.0	7	8.33	300	12.6	38	50	75	1.0	100
SAC8.0	8	8.89	100	13.4	36	50	75	1.0	100
SAC8.5	8.5	9.44	50	14.0	34	50	75	1.0	100
SAC10	10	11.10	5.0	16.3	29	50	75	1.0	100
SAC12	12	13.30	5.0	19.0	25	50	75	1.0	100
SAC15	15	16.70	5.0	23.6	20	50	75	1.0	100
SAC18	18	20.00	5.0	28.8	15	50	75	1.0	100
SAC22	22	24.40	5.0	35.4	14	50	75	1.0	100
SAC26	26	28.90	5.0	42.3	11.1	50	75	1.0	100
SAC30	30	33.30	5.0	48.6	10.0	50	75	1.0	100
SAC36	36	40.00	5.0	60.0	8.6	50	75	1.0	100
SAC45	45	50.00	5.0	77.0	6.8	50	150	1.0	200
SAC50	50	55.50	5.0	88.0	5.8	50	150	1.0	200

Note:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2

ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SAC5.0-E3/54	0.432	54	4000	13" diameter paper tape and reel

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

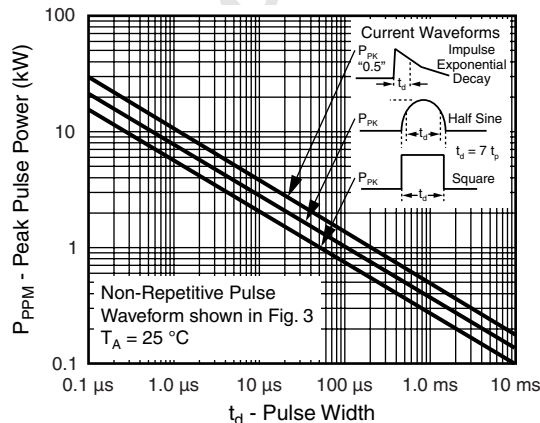


Figure 1. Peak Pulse Power Rating Curve



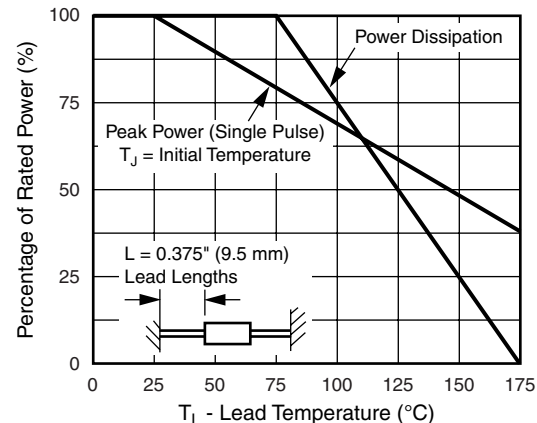


Figure 2. Power Derating Curve

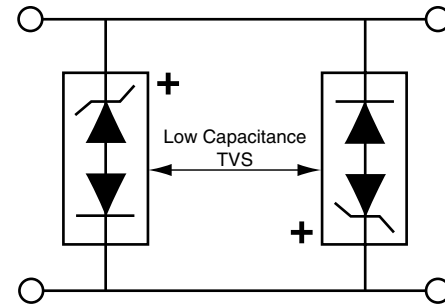

SAC5.0 thru SAC50


Vishay General Semiconductor

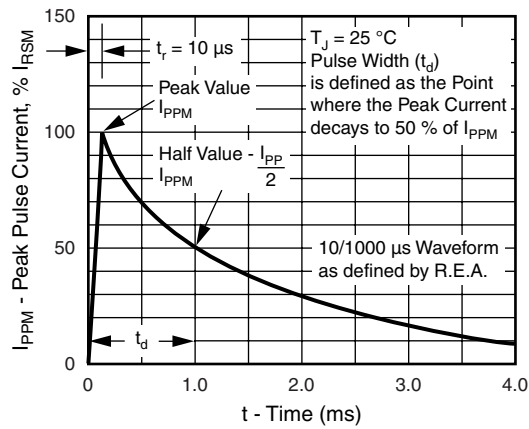

Application Note: Device must be used with two units in parallel, opposite in polarity as shown in circuit for AC signal line protection.


Figure 4. AC Line Protection Application

SCHEMATIC



PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-204AC (DO-15)

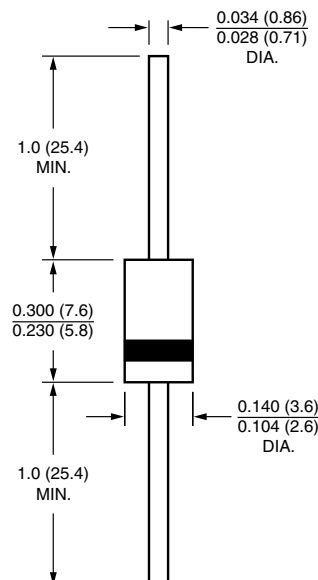



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.