


SC Coils – Terminal Base Type

SC-JS Type


[RoHS Compliant]



Model	Rated current (A)	Inductance (mH) min.	DC resistance (mΩ/line) max.	Temperature rise(K) max.	Wire size (mmφ)	Weight approx. (g)
SC-02-15JS	2	1.5	120	40	0.5	20
SC-02-20JS	2	2.0	120	40	0.5	24
SC-03-08JS	3	0.8	60	40	0.6	20
SC-03-10JS	3	1.0	80	40	0.6	24


- Rated voltage: 250VAC/VDC • Withstanding voltage: AC 2400V (2 sec between lines)
- Insulation resistance: at 500VDC, more than 100MΩ (between lines, from line to tube) • Thermal class: A (105°C)
- Operating temperature range (°C): -25 to T (T=105-temperature rise)
- Inductance measurement condition: 1kHz, 0.3mA, KC547

Shape and Dimensions



[mm]

Frequency characteristic

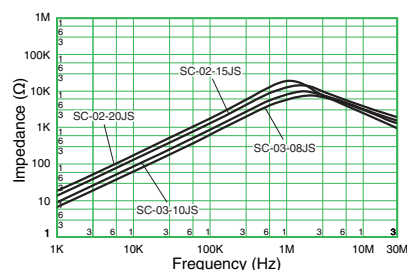

AC Line Filters VOL.08



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.