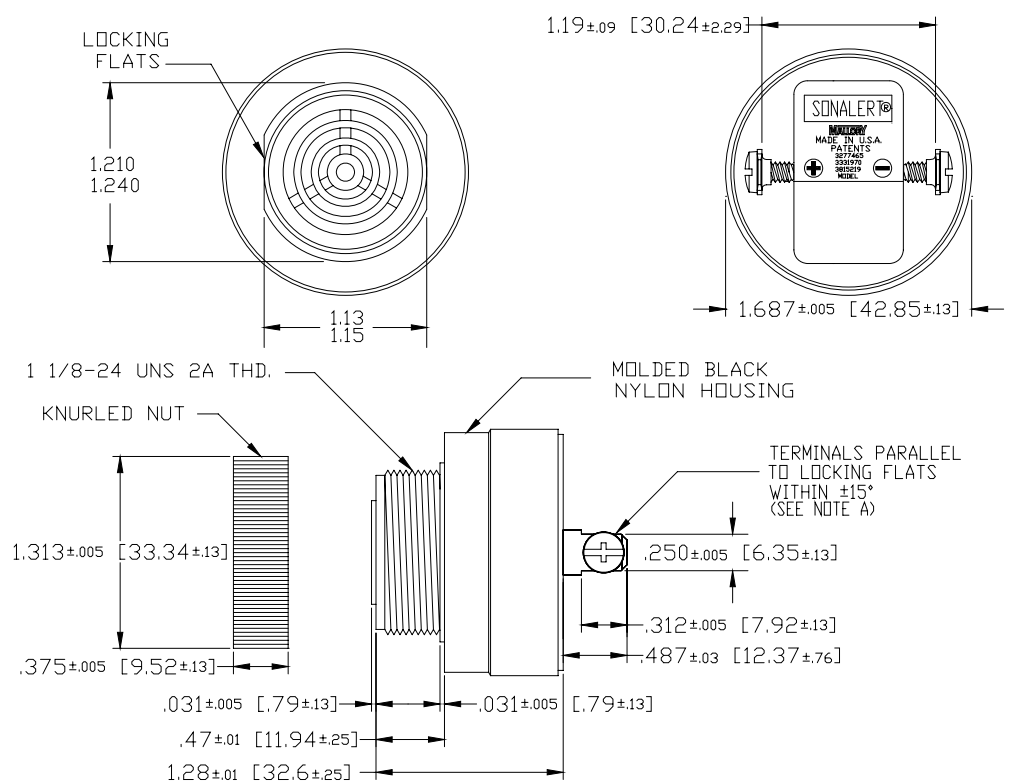


**Specifications:**

|                         |                                   |
|-------------------------|-----------------------------------|
| Sound level Category    | Low Sound Level                   |
| Mode of Operation       | Continuous tone                   |
| Mounting                | Panel (see note B)                |
| Voltage Rating          | 6 - 28 Vdc                        |
| Frequency               | 2900 Hz $\pm$ 500 Hz              |
| Loudness (Min. Voltage) | 55 to 68 dB(A) @ 2 FT and 6 Vdc   |
| Loudness (Max Voltage)  | 70 to 80 dB(A) @ 2 FT and 28 Vdc  |
| Current Draw            | 2 mA Max @ 6 Vdc                  |
| Current Draw            | 4 mA Max @ 28 Vdc                 |
| Storage Temperature     | -40°C to +85°C                    |
| Operating Temperature   | -30°C to +65°C                    |
| Weight (Typical)        | 1.5 oz (42 g)                     |
| Housing                 | 6/6 Nylon, Color Black            |
| Options                 | For other options contact factory |

**Dimensions:** Inches (mm)**RoHS Compliant**

NOTE A: TERMINALS-.032 BRASS TIN PLATED, TAPPED FOR #6-32 SCREW. TWO #6-32 NICKEL PLATED BRASS SCREWS INCLUDED. WILL ACCEPT 1/4" QUICK CONNECT.

NOTE B: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[SC628FR](#)