

Metallized Polyester (PET) SMD Film Capacitors with Box Encapsulation

Special Features

- Size codes 1812, 2220, 2824, 4030, 5040 and 6054 with PET and encapsulated
- Operating temperature up to 100° C
- Self-healing
- According to RoHS 2011/65/EU

Typical Applications

For general DC-applications e.g.

- By-pass
- Blocking
- Coupling and decoupling
- Timing

Construction


Dielectric:

Polyethylene-terephthalate (PET) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

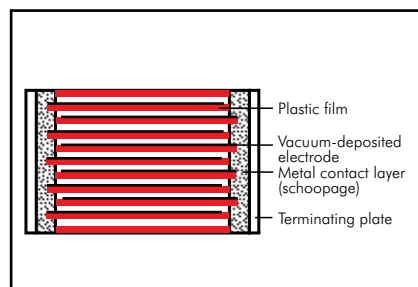

Encapsulation:

Solvent-resistant, flame-retardant plastic case, UL 94 V-0

Terminations:

Tinned plates.

Marking:

Box colour: Black.

Electrical Data

Capacitance range:

0.01 μ F to 6.8 μ F

Rated voltages:

63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC, 1000 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$ ($\pm 5\%$ available subject to special enquiry)

Operating temperature range:

-55° C to $+100^{\circ}$ C ($+125^{\circ}$ C available subject to special enquiry)

Climatic test category:

55/100/21 according to IEC

for size codes 1812 to 2824

55/100/56 according to IEC

for size codes 4030 to 6054

Insulation resistance at $+20^{\circ}$ C:

U_r	U_{test}	$C \leq 0.33 \mu F$	$0.33 \mu F < C \leq 6.8 \mu F$
63 VDC	50 V	$\geq 3.75 \times 10^3 M\Omega$	$\geq 1250 \text{ sec } (M\Omega \times \mu F)$
100 VDC	100 V	(mean value: $1 \times 10^4 M\Omega$)	(mean value: 3000 sec)
≥ 250 VDC	100 V	$\geq 1 \times 10^4 M\Omega$	$\geq 3000 \text{ sec } (M\Omega \times \mu F)$
		(mean value: $5 \times 10^4 M\Omega$)	(mean value: 10 000 sec)

Measuring time: 1 min.

Dissipation factors at $+20^{\circ}$ C: $\tan \delta$

at f	$C \leq 0.1 \mu F$	$0.1 \mu F < C \leq 1.0 \mu F$	$C > 1.0 \mu F$
1 kHz	$\leq 8 \times 10^{-3}$	$\leq 8 \times 10^{-3}$	$\leq 10 \times 10^{-3}$
10 kHz	$\leq 15 \times 10^{-3}$	$\leq 15 \times 10^{-3}$	—
100 kHz	$\leq 30 \times 10^{-3}$	—	—

Maximum pulse rise time: for pulses equal to the rated voltage

Capacitance μF	Pulse rise time V/ μ sec max. operation/test					
	63 VDC	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC
0.01 ... 0.022	30/300	35/350	40/400	35/350	40/400	50/500
0.033 ... 0.068	20/200	20/200	40/400	21/210	25/250	32/320
0.1 ... 0.22	10/100	10/100	12/120	14/140	17/170	—
0.33 ... 0.68	8/80	6/60	9/90	10/100	—	—
1.0 ... 2.2	3.5/35	4/40	7/70	—	—	—
3.3 ... 6.8	3/30	3/30	—	—	—	—

Dip Solder Test/Processing

Resistance to soldering heat:

Test Tb in accordance with DIN IEC

60068-2-58/DIN EN 60384-19.

Soldering bath temperature max. 260° C.

Soldering duration max. 5 sec.

Change in capacitance $\Delta C/C < 5\%$.

Soldering process:

Re-flow soldering (see temperature/time graphs page 131).

Packing

Available taped and reeled in blister pack.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	63 VDC/40 VAC*			100 VDC/63 VAC*			250 VDC/160 VAC*		
	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number
0.01 µF	1812	3.0	SMDTC02100KA00_	1812	3.0	SMDTD02100KA00_	2220	3.5	SMDTF02100QA00_
	2220	3.5	SMDTC02100QA00_	2220	3.5	SMDTD02100QA00_	2824	3.0	SMDTF02100TA00_
	2824	3.0	SMDTC02100TA00_	2824	3.0	SMDTD02100TA00_			
0.015 "	1812	3.0	SMDTC02150KA00_	1812	3.0	SMDTD02150KA00_	2220	3.5	SMDTF02150QA00_
	2220	3.5	SMDTC02150QA00_	2220	3.5	SMDTD02150QA00_	2824	3.0	SMDTF02150TA00_
	2824	3.0	SMDTC02150TA00_	2824	3.0	SMDTD02150TA00_			
0.022 "	1812	3.0	SMDTC02220KA00_	1812	3.0	SMDTD02220KA00_	2220	3.5	SMDTF02220QA00_
	2220	3.5	SMDTC02220QA00_	2220	3.5	SMDTD02220QA00_	2824	3.0	SMDTF02220TA00_
	2824	3.0	SMDTC02220TA00_	2824	3.0	SMDTD02220TA00_			
0.033 "	1812	3.0	SMDTC02330KA00_	1812	3.0	SMDTD02330KA00_	2220	3.5	SMDTF02330QA00_
	2220	3.5	SMDTC02330QA00_	2220	3.5	SMDTD02330QA00_	2824	3.0	SMDTF02330TA00_
	2824	3.0	SMDTC02330TA00_	2824	3.0	SMDTD02330TA00_	4030	5.0	SMDTF02330VA00_
0.047 "	1812	3.0	SMDTC02470KA00_	1812	3.0	SMDTD02470KA00_	2220	3.5	SMDTF02470QA00_
	2220	3.5	SMDTC02470QA00_	2220	3.5	SMDTD02470QA00_	2824	3.0	SMDTF02470TA00_
	2824	3.0	SMDTC02470TA00_	2824	3.0	SMDTD02470TA00_	4030	5.0	SMDTF02470VA00_
0.068 "	1812	3.0	SMDTC02680KA00_	1812	3.0	SMDTD02680KA00_	2220	4.5*	SMDTF02680QB00_
	2220	3.5	SMDTC02680QA00_	2220	3.5	SMDTD02680QA00_	2824	3.0	SMDTF02680TA00_
	2824	3.0	SMDTC02680TA00_	2824	3.0	SMDTD02680TA00_	4030	5.0	SMDTF02680VA00_
0.1 µF	1812	4.0*	SMDTC03100KB00_	1812	4.0*	SMDTD03100KB00_	2220	4.5*	SMDTF03100QB00_
	2220	3.5	SMDTC03100QA00_	2220	3.5	SMDTD03100QA00_	2824	5.0	SMDTF03100TB00_
	2824	3.0	SMDTC03100TA00_	2824	3.0	SMDTD03100TA00_	4030	5.0	SMDTF03100VA00_
0.15 "	1812	4.0*	SMDTC03150KB00_	1812	4.0	SMDTD03150KB00_	2824	5.0	SMDTF03150TB00_
	2220	3.5	SMDTC03150QA00_	2220	3.5	SMDTD03150QA00_	4030	5.0	SMDTF03150VA00_
	2824	3.0	SMDTC03150TA00_	2824	3.0	SMDTD03150TA00_			
0.22 "	1812	4.0*	SMDTC03220KB00_	1812	4.0	SMDTD03220KB00_	2824	5.0	SMDTF03220TB00_
	2220	3.5	SMDTC03220QA00_	2220	3.5	SMDTD03220QA00_	4030	5.0	SMDTF03220VA00_
	2824	3.0	SMDTC03220TA00_	2824	3.0	SMDTD03220TA00_			
0.33 "	1812	4.0	SMDTC03330KB00_	2220	4.5	SMDTD03330QB00_	2824	5.0	SMDTF03330TB00_
	2220	4.5*	SMDTC03330QB00_	2824	5.0	SMDTD03330TB00_	4030	5.0	SMDTF03330VA00_
	2824	5.0*	SMDTC03330TB00_	4030	5.0	SMDTD03330VA00_	5040	6.0	SMDTF03330XA00_
0.47 "	1812	4.0	SMDTC03470KB00_	2220	4.5	SMDTD03470QB00_	4030	5.0	SMDTF03470VA00_
	2220	4.5*	SMDTC03470QB00_	2824	5.0	SMDTD03470TB00_	5040	6.0	SMDTF03470XA00_
	2824	5.0*	SMDTC03470TB00_	4030	5.0	SMDTD03470VA00_			
0.68 "	2220	4.5	SMDTC03680QB00_	2824	5.0	SMDTD03680TB00_	5040	6.0	SMDTF03680XA00_
	2824	5.0*	SMDTC03680TB00_	4030	5.0	SMDTD03680VA00_			
	4030	5.0	SMDTC03680VA00_	5040	6.0	SMDTD03680XA00_			
1.0 µF	2220	4.5	SMDTC04100QB00_	2824	5.0	SMDTD04100TB00_	6054	7.0	SMDTF04100YA00_
	2824	5.0*	SMDTC04100TB00_	4030	5.0	SMDTD04100VA00_			
	4030	5.0	SMDTC04100VA00_	5040	6.0	SMDTD04100XA00_			
1.5 "	2824	5.0	SMDTC04150TB00_	4030	5.0	SMDTD04150VA00_	* Version according to catalogue 2013 still available		
	4030	5.0	SMDTC04150VA00_	5040	6.0	SMDTD04150XA00_			
2.2 "	2824	5.0	SMDTC04220TB00_	5040	6.0	SMDTD04220XA00_			
	4030	5.0	SMDTC04220VA00_						
3.3 "	4030	5.0	SMDTC04330VA00_	5040	6.0	SMDTD04330XA00_			
4.7 "	5040	6.0	SMDTC04470XA00_	6054	7.0	SMDTD04470YA00_			
6.8 "	6054	7.0	SMDTC04680YA00_						

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

Dims. in mm.

Rights reserved to amend design data without prior notification.

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: none = 00

Taped version see page 139.

Continuation


General Data

Capacitance	400 VDC/200 VAC*			630 VDC/300 VAC*			1000 VDC/400 VAC*		
	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number
0.01 μF	2824 4030	3.0 5.0	SMDTG02100TA00_____ SMDTG02100VA00_____ SMDTG02100XA00_____ SMDTG02100YA00_____	4030	5.0	SMDTJ02100VA00_____ SMDTJ02100XA00_____ SMDTJ02100YA00_____			
0.015 "	2824 4030	3.0 5.0	SMDTG02150TA00_____ SMDTG02150VA00_____ SMDTG02150XA00_____ SMDTG02150YA00_____	4030	5.0	SMDTJ02150VA00_____ SMDTJ02150XA00_____ SMDTJ02150YA00_____	5040	6.0	SMDTO12150XA00_____ SMDTO12150YA00_____
0.022 "	2824 4030	5.0* 5.0	SMDTG02220TB00_____ SMDTG02220VA00_____ SMDTG02220XA00_____ SMDTG02220YA00_____	5040	6.0	SMDTJ02220XA00_____ SMDTJ02220YA00_____	5040	6.0	SMDTO12220XA00_____ SMDTO12220YA00_____
0.033 "	2824 4030	5.0 5.0	SMDTG02330TB00_____ SMDTG02330VA00_____ SMDTG02330XA00_____ SMDTG02330YA00_____	5040	6.0	SMDTJ02330XA00_____ SMDTJ02330YA00_____	5040	6.0	SMDTO12330XA00_____ SMDTO12330YA00_____
0.047 "	2824 4030	5.0 5.0	SMDTG02470TB00_____ SMDTG02470VA00_____ SMDTG02470XA00_____ SMDTG02470YA00_____	5040	6.0	SMDTJ02470XA00_____ SMDTJ02470YA00_____	6054	7.0	SMDTO12470YA00_____
0.068 "	4030 5040	5.0 6.0	SMDTG02680VA00_____ SMDTG02680XA00_____ SMDTG02680YA00_____	5040	6.0	SMDTJ02680XA00_____ SMDTJ02680YA00_____			
0.1 μF	4030 5040	5.0 6.0	SMDTG03100VA00_____ SMDTG03100XA00_____ SMDTG03100YA00_____	6054	7.0	SMDTJ03100YA00_____			
0.15 "	4030 5040	5.0 6.0	SMDTG03150VA00_____ SMDTG03150XA00_____ SMDTG03150YA00_____	6054	7.0	SMDTJ03150YA00_____			
0.22 "	5040	6.0	SMDTG03220XA00_____ SMDTG03220YA00_____	6054	7.0	SMDTJ03220YA00_____			
0.33 "	5040	6.0	SMDTG03330XA00_____ SMDTG03330YA00_____						
0.47 "	6054	7.0	SMDTG03470YA00_____						

* AC voltage: $f = 50 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

* Version according to catalogue 2013 still available

Solder pad recommendation



Dims. in mm.

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: none = 00

Taped version see page 139.

Size code	L ±0.3	W ±0.3	d	a min.	b min.	c max.
1812	4.8	3.3	0.5	1.2	3.5	3.5
2220	5.7	5.1	0.5	1.2	4	4.5
2824	7.2	6.1	0.5	1.2	4	6.5
4030	10.2	7.6	0.5	2.5	6	9
5040	12.7	10.2	0.7	2.5	6	11.5
6054	15.3	13.7	0.7	2.5	6	14

Rights reserved to amend design data without prior notification.


Recommendation for Processing and Application of SMD Capacitors



Layout Form

The components can generally be positioned on the carrier material as desired. In order to prevent soldering shadows or ensure regular temperature distribution, extreme concentration of the components should be avoided. In practice, it has proven best to keep a minimum distance of the soldering surfaces between two WIMA SMDs of twice the height of the components.

Solder Pad Recommendation



Size code	L ± 0.3	W ± 0.3	d	a min.	b min.	c max.
1812	4.8	3.3	0.5	1.2	3.5	3.5
2220	5.7	5.1	0.5	1.2	4	4.5
2824	7.2	6.1	0.5	1.2	4	6.5
4030	10.2	7.6	0.5	2.5	6	9
5040	12.7	10.2	0.7	2.5	6	11.5
6054	15.3	13.7	0.7	2.5	6	14

The solder pad size recommendations given for each individual series are to be understood as minimum dimensions which can at any time be adjusted to the layout form.

Processing


The processing of SMD components

- assembling
- soldering
- electrical final inspection/ calibrating

must be regarded as a complete process. The soldering of the printed circuit board, for example, can constitute considerable stress on all the electronic components. The manufacturer's instructions on the processing of the components are mandatory.

Soldering Process

Re-flow soldering

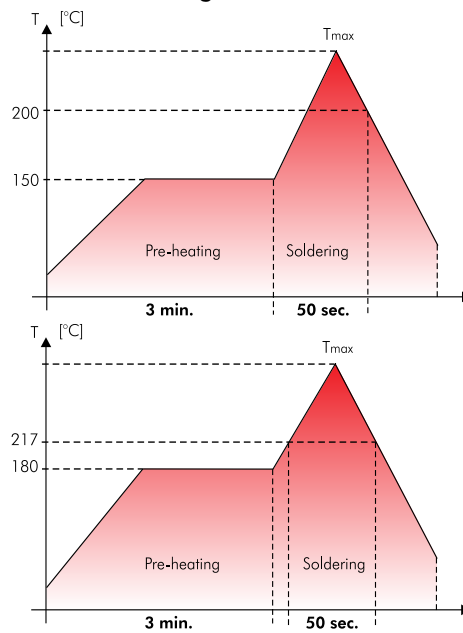

SMD-PET	
Size code	Tmax.
1812	220° C
2220	230° C
2824	230° C
4030	230° C
5040	240° C
6054	250° C

SMD-PEN	
Size code	Tmax.
1812	220° C
2220	230° C
2824	230° C

SMD-PPS	
Size code	Tmax.
1812	250° C
2220	250° C
2824	250° C
4030	250° C
5040	250° C
6054	250° C

Temperature/time graph for the permissible processing temperature of the WIMA SMD film capacitor for typical convection soldering processes.

Due to versatile procedures exact processing parameters for re-flow soldering processes cannot be specified. The graph depicted is to be understood as a recommendation to help establishing a suitable soldering profile fulfilling the requirements

in practice at the user. During processing a max. temperature of $T=210^{\circ}\text{C}$ inside the component should not be exceeded. Due to the differing heat absorption the length of the soldering process should be kept as short as possible for smaller size codes.

SMD Handsoldering

WIMA SMD capacitors with plastic film dielectric are generally suitable for hand-soldering, e. g. for lab purposes, with a soldering iron where, however, similar to automated soldering processes, a certain duration and temperature should not be exceeded. These parameters are dependent on the physical size of the components and the relevant heat absorption involved.

The below data are to be regarded as guideline values and should serve to avoid damage to the dielectric caused by excessive heat during the soldering process. The soldering quality depends on the tool used and on the skill and experience of the person with the soldering iron in hand.

Size code	Temperature °C / °F	Time duration
1812	250 / 482	2 sec plate 1 / 5 sec off / 2 sec plate 2
2220	250 / 482	3 sec plate 1 / 5 sec off / 3 sec plate 2
2824	260 / 500	3 sec plate 1 / 5 sec off / 3 sec plate 2
4030	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2
5040	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2
6054	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2

Recommendation for Processing and Application of SMD Capacitors (Continuation)

Solder Paste

To achieve reliable soldering results one of the following solder alloys have from case to case proven being workable:

Lead free solder paste

Sn - Bi
Sn - Zn (Bi)
Sn - Ag - Cu (suitable for SMD-PET 5040/6054 and SMD-PPS)

Solder paste with lead

Sn - Pb - Ag (Sn60-Pb40-A, Sn63-Pb37-A)

Washing

WIMA SMD components with plastic encapsulation - like all other components of similar construction irrespective of the make - cannot be regarded as hermetically sealed. Due to today's common washing substances, e. g. on aqueous basis instead of the formerly used halogenated hydrocarbons, with enhanced washing efficiency it became obvious that assembled SMD capacitors may show an impermissibly high deviation of the electrical parameters after a corresponding washing process. Hence it is recommended to refrain from applying industrial washing processes for WIMA SMD capacitors in order to avoid possible damages.

Initial Operation/Calibration

Due to the stress which the components are subjected to during processing, reversible parameter changes occur in almost all electronic components. The capacitance recovery accuracy to be expected with careful processing is within a scope of

$$|\Delta C/C| \leq 5 \%$$

For the initial operation of the device a minimum storage time of

$$t \geq 24 \text{ hours}$$

is to be taken into account. With calibrated devices or when the application is largely dependent on capacitance it is

advisable to prolong the storage time to

$$t \geq 10 \text{ days}$$

In this way ageing effects of the capacitor structure can be anticipated. Parameter changes due to processing are not to be expected after this period of time

Humidity Protection Bags

Taped WIMA SMD capacitors are shipped in humidity protection bags according to JEDEC standard (ESD/EMI-shield/water-vapour proof).

Under controlled conditions the components can be stored two years and more in the originally sealed bag. Opened packing units should immediately be used up for processing. If storage is necessary the opened packing units should be stored air-tight in the original plastic bag.

Reliability

Taking account of the manufacturer's guidelines and compatible processing, the WIMA SMD stand out for the same high quality and reliability as the analogous through-hole WIMA series. The technology of metallized film capacitors used e.g. in WIMA SMD-PET achieves the best values for all fields of application. The expected value is about:

$$\lambda_0 \leq 2 \text{ fit}$$

Furthermore the production of all WIMA components is subject to the regulations laid down by ISO 9001:2008 as well as the guidelines for component specifications set out by IEC quality assessment system (IECQ) for electronic components.

Electrical Characteristics and Fields of Application

Basically the WIMA SMD series have the same electrical characteristics as the analogous through-hole WIMA capacitors. Compared to ceramic or tantalum dielectrics WIMA SMD capacitors have a

number of other outstanding qualities:

- favourable pulse rise time
- low ESR
- low dielectric absorption
- available in high voltage series
- large capacitance spectrum
- stand up to high mechanical stress
- good long-term stability

As regards technical performance as well as quality and reliability, the WIMA SMD series offer the possibility to cover nearly all applications of conventionally through-hole film capacitors with SMD components. Furthermore, the WIMA SMD series can now be used for all the demanding capacitor applications for which, in the past, the use of through-hole components was mandatory:


- measuring techniques
- oscillator circuits
- differentiating and integrating circuits
- A/D or D/A transformers
- sample and hold circuits
- automotive electronics

With the WIMA SMD programme available today, the major part of all plastic film capacitors can be replaced by WIMA SMD components. The field of application ranges from standard coupling capacitors to use in switch-mode power supplies as filter or charging capacitors with high voltage and capacitance values, as well as in telecommunications e.g. the well-known telephone capacitor $1 \mu\text{F}/250\text{VDC}$.



Blister Tape Packaging and Packing Units of the WIMA SMD Capacitors



Tape reel:

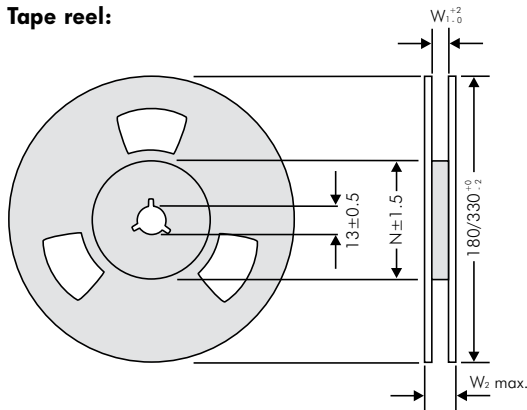

Tape advance and return:

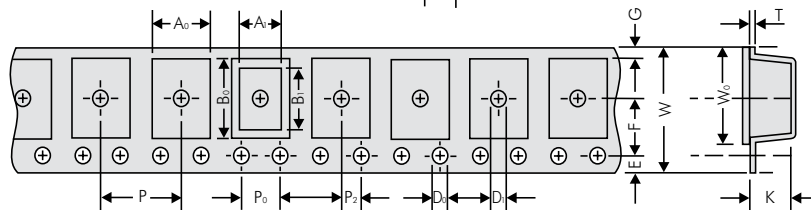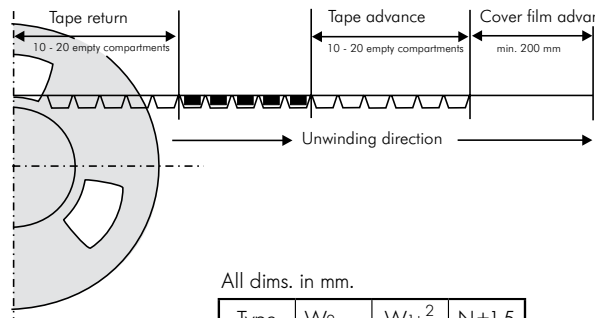

All dims. in mm.

Type	W _{2max}	W ₁ ± 0.2	N ± 1.5
1812	19	12.4	62
2220	19	12.4	62
2824	19	12.4	62
4030	22.4	16.4	60
5040	30.4	24.4	90
6054	30.4	24.4	90

Packing units

Size Code 1812		A ₀ ± 0.1	A ₁	B ₀ ± 0.1	B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ± 0.1	P ₀ * ± 0.1	P ₂ ± 0.05	E ± 0.1	F ± 0.05	G	W ± 0.3	W ₀ ± 0.2	K ± 0.1	T ± 0.1
Box size	Code																
4.8x3.3x3	KA	3.55	3.3	5.1	4.8	ø1.5	ø1.5	8	4	2	1.75	5.5	2.2	12	9.5	3.4	0.3
4.8x3.3x4	KB	3.55	3.3	5.1	4.8	ø1.5	ø1.5	8	4	2	1.75	5.5	2.2	12	9.5	4.4	0.3

taped Reel	taped Reel	bulk
180 mm ø	330 mm ø	Standard
700	2500	3000
500	2000	3000

Size Code 2220		A ₀ ± 0.1	A ₁	B ₀ ± 0.1	B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ± 0.1	P ₀ * ± 0.1	P ₂ ± 0.05	E ± 0.1	F ± 0.05	G	W ± 0.3	W ₀ ± 0.2	K ± 0.1	T ± 0.1
Box size	Code																
5.7x5.1x3.5	QA	6.3	5.7	5.6	5.1	ø1.5	ø1.5	8	4	2	1.75	5.5	1.95	12	9.5	3.7	0.3
5.7x5.1x4.5	QB	6.3	5.7	5.6	5.1	ø1.5	ø1.5	8	4	2	1.75	5.5	1.95	12	9.5	4.7	0.3

taped Reel	taped Reel	bulk
180 mm ø	330 mm ø	Standard
500	1800	3000
400	1500	3000

Size Code 2824		A ₀ ± 0.1	A ₁	B ₀ ± 0.1	B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ± 0.1	P ₀ * ± 0.1	P ₂ ± 0.05	E ± 0.1	F ± 0.05	G	W ± 0.3	W ₀ ± 0.2	K ± 0.1	T ± 0.1
Box size	Code																
7.2x6.1x3	TA	6.6	6.1	7.7	7.2	ø1.5	ø1.5	12	4	2	1.75	5.5	0.9	12	9.5	3.4	0.3
7.2x6.1x5	TB	6.6	6.1	7.7	7.2	ø1.5	ø1.5	12	4	2	1.75	5.5	0.9	12	9.5	5.4	0.4

taped Reel	bulk
330 mm ø	Standard
1500	2000
750	2000

		Code	A ₀ ± 0.1	A ₁	B ₀ ± 0.1	B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ± 0.1	P ₀ * ± 0.1	P ₂ ± 0.05	E ± 0.1	F ± 0.05	G	W ± 0.3	W ₀ ± 0.2	K ± 0.1	T ± 0.1
Size Code 4030		VA	10.7	10.2	8.1	9.1	ø1.5	ø1.5	16	4	2	1.75	7.5	1.9	16	13.3	5.5	0.3
Size Code 5040		XA	13.5	12.7	11	11.5	ø1.5	ø1.5	16	4	2	1.75	11.5	4.7	24	21.3	6.5	0.3
Size Code 6054		YA	17.0	16.5	15.6	15.0	ø1.5	ø1.5	20	4	2	1.75	11.5	2.95	24	21.3	7.5	0.3

taped Reel	bulk
330 mm ø	Standard
775	2000
600	1000
450	500

* cumulative after 10 steps ± 0.2 mm max.
Samples and pre-production needs on request or 1 Reel minimum.

Part number codes for SMD packing

W (Blister)	ø in mm	Code
12	180	P
12	330	Q
16	330	R
24	330	T

Bulk Standard	S
---------------	---

WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
 Field 5 - 6: Rated voltage
 Field 7 - 10: Capacitance
 Field 11 - 12: Size and PCM
 Field 13 - 14: Version code (e.g. Snubber versions)
 Field 15: Capacitance tolerance
 Field 16: Packing
 Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 μF				2.5×6.5×7.2		-		20%	bulk	6 -2	
Type description:				Rated voltage:		Capacitance:				Size:		Tolerance:		Packing:			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022				4.8×3.3×3 Size 1812 = KA		±20% = M		AMMO H16.5 340×340 = A			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047				4.8×3.3×4 Size 1812 = KB		±10% = K		AMMO H16.5 490×370 = B			
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100				5.7×5.1×3.5 Size 2220 = QA		±5% = J		AMMO H18.5 340×340 = C			
FKP 02 = FKPO				250 VDC = F0		150 pF = 0150				5.7×5.1×4.5 Size 2220 = QB		±2.5% = H		AMMO H18.5 490×370 = D			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220				7.2×6.1×3 Size 2824 = TA		±1% = E		REEL H16.5 360 = F			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330				7.2×6.1×5 Size 2824 = TB		...		REEL H16.5 500 = H			
FKP 2 = FKP2				600 VDC = I0		470 pF = 0470				10.2×7.6×5 Size 4030 = VA				REEL H18.5 360 = I			
MKS 2 = MKS2				630 VDC = J0		680 pF = 0680				12.7×10.2×6 Size 5040 = XA				REEL H18.5 500 = J			
MKP 2 = MKP2				700 VDC = K0		1000 pF = 1100				15.3×13.7×7 Size 6054 = YA				ROLL H16.5 = N			
FKS 3 = FKS3				800 VDC = L0		1500 pF = 1150				2.5×7×4.6 PCM 2.5 = 0B				ROLL H18.5 = O			
FKP 3 = FKP3				850 VDC = M0		2200 pF = 1220				3×7.5×4.6 PCM 2.5 = 0C				BLISTER W12 180 = P			
MKS 4 = MKS4				900 VDC = N0		3300 pF = 1330				2.5×6.5×7.2 PCM 5 = 1A				BLISTER W12 330 = Q			
MKP 4 = MKP4				1000 VDC = O1		4700 pF = 1470				3×7.5×7.2 PCM 5 = 1B				BLISTER W16 330 = R			
MKP 10 = MKP1				1100 VDC = P0		6800 pF = 1680				2.5×7×10 PCM 7.5 = 2A				BLISTER W24 330 = T			
FKP 4 = FKP4				1200 VDC = Q0		0.01 μF = 2100				3×8.5×10 PCM 7.5 = 2B				Bulk/TPS Standard = S			
FKP 1 = FKP1				1250 VDC = R0		0.022 μF = 2220				3×9×13 PCM 10 = 3A				...			
MKP-X2 = MKX2				1500 VDC = S0		0.047 μF = 2470				4×9×13 PCM 10 = 3C							
MKP-X2 R = MKXR				1600 VDC = T0		0.1 μF = 3100				5×11×18 PCM 15 = 4B							
MKP-X1 R = MKX1				2000 VDC = U0		0.22 μF = 3220				6×12.5×18 PCM 15 = 4C							
MKP-Y2 = MKY2				2500 VDC = V0		0.47 μF = 3470				5×14×26.5 PCM 22.5 = 5A							
MP 3-X2 = MPX2				3000 VDC = W0		1 μF = 4100				6×15×26.5 PCM 22.5 = 5B							
MP 3-X1 = MPX1				4000 VDC = X0		2.2 μF = 4220				9×19×31.5 PCM 27.5 = 6A							
MP 3-Y2 = MPY2				6000 VDC = Y0		4.7 μF = 4470				11×21×31.5 PCM 27.5 = 6B							
MP 3R-Y2 = MPRY				250 VAC = 0W		10 μF = 5100				9×19×41.5 PCM 37.5 = 7A							
Snubber MKP = SNMP				275 VAC = 1W		22 μF = 5220				11×22×41.5 PCM 37.5 = 7B							
Snubber FKP = SNFP				300 VAC = 2W		47 μF = 5470				19×31×56 PCM 48.5 = 8D							
GTO MKP = GTOM				305 VAC = AW		100 μF = 6100				35×50×57 PCM 52.5 = 9F							
DC-LINK MKP 3 = DCP3				400 VAC = 3W		220 μF = 6220				...							
DC-LINK MKP 4 = DCP4				440 VAC = 4W		1000 μF = 7100											
DC-LINK MKP 4S = DCP5				500 VAC = 5W		1500 μF = 7150											
DC-LINK MKP 5 = DCP5				...		...											
DC-LINK MKP 6 = DCP6																	
DC-LINK HC = DCHC																	
DC-LINK HY = DCHY																	