




SR2020C THRU SR20A0C

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 20.0 Amperes

TO-220AB

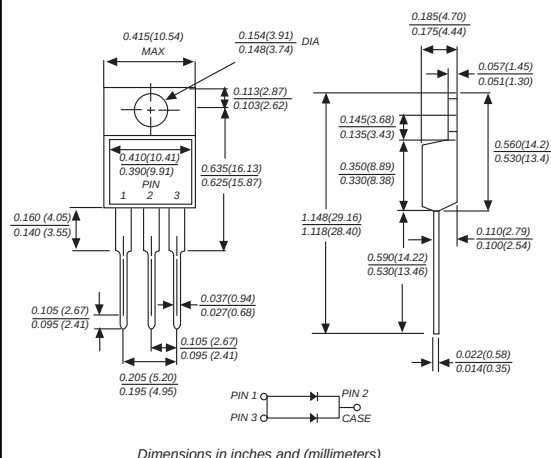

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C, 0.25" (6.35mm) from case for 10 seconds

MECHANICAL DATA

Case: TO-220AB molded plastic body
Terminals: Leads solderable per MIL-STD-750, Method 2026
Polarity: As marked
Mounting Position: Any
Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

MDD Catalog Number	SYMBOLS	SR 2020C	SR 2030C	SR 2040C	SR 2045C	SR 2050C	SR 2060C	SR 2070C	SR 2080C	SR 2090C	SR 20A0C	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	32	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current at Tc(see fig.1)	I _(AV)	20.0										Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0										Amps
Maximum instantaneous forward voltage at 10.0A	V _F	0.55					0.75		0.85			Volts
Maximum DC reverse current TA=25°C	I _R	1.0										mA
at rated DC blocking voltage TA=100°C		15.0					50.0					
Typical junction capacitance (NOTE 1)	C _J	550					450					pF
Typical thermal resistance (NOTE 2)	RθJC	2.0										°C/W
Operating junction temperature range	T _J	-65 to +125					-65 to +150					°C
Storage temperature range	T _{STG}	-65 to +150										°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2. Thermal resistance from junction to case

MDD ELECTRONIC

RATINGS AND CHARACTERISTIC CURVES SR2020C THRU SR20A0C

AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

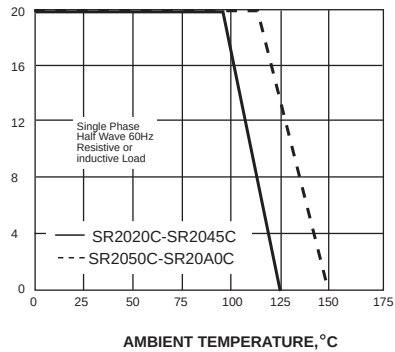

PEAK FORWARD SURGE CURRENT,
AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


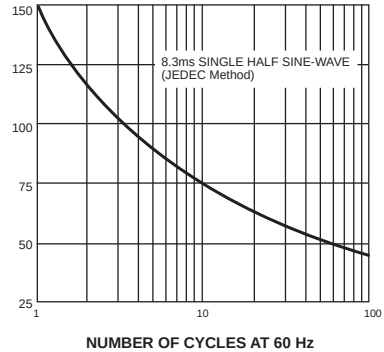


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

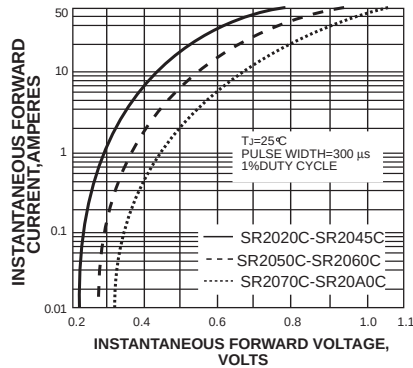

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

FIG. 4-TYPICAL REVERSE CHARACTERISTICS



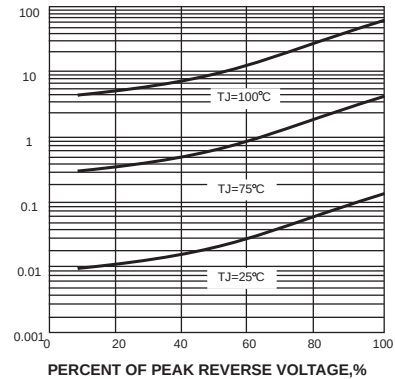


FIG. 5-TYPICAL JUNCTION CAPACITANCE

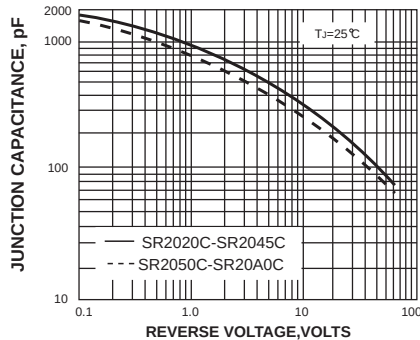

TRANSIENT THERMAL IMPEDANCE,
°C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

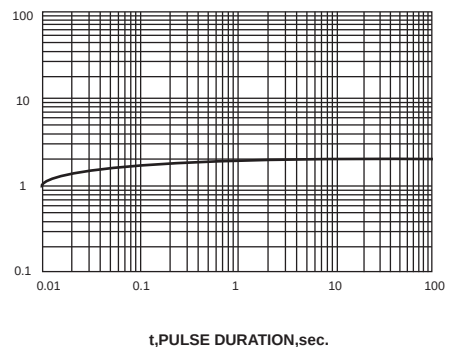

MDD ELECTRONIC