
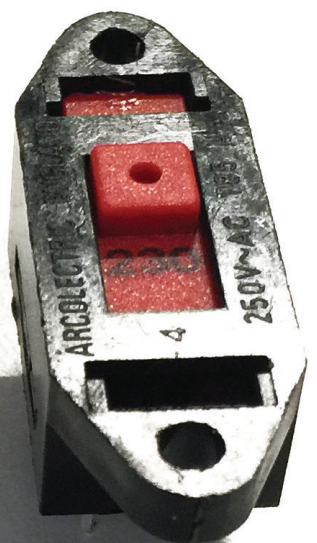


Slide Switches


With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- ⊞ Ratings up to 16A, 250V ac
- ⊞ PCB and solder terminals
- ⊞ Voltage Selector Models
- ⊞ Snap in and flange mounting
- ⊞ 2, 3, 4 and 5 position
- ⊞ Choice of circuits
- ⊞ Choice of actuators

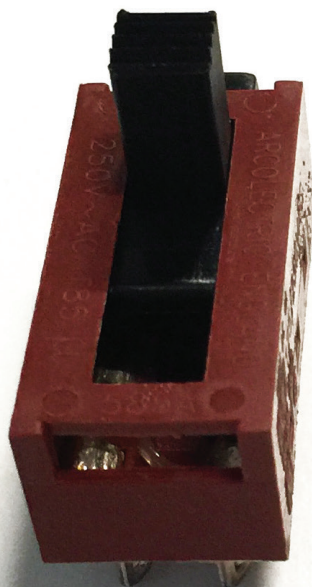

2000 Slide Switches - up to 5 position

10A 250Vac



Key Features

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

CE 10A 250Vac T85
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap
Please specify: Standard action (SP116) or Light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider				
K 2.8 x 0.8	2	2 Switching positions	10 	0 	6 	D 	L 	
R 2.8 x 0.8			20 	1 	7 	E 	N 	
T Solder		3 Switching positions	30 	2 	9 	G 	P 	
X PCB 0.8 Sq.			40 	3 	A 	H 	R 	
Y PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales		4 Switching positions	10 	4 	B 	J 	S 	
	5		20 	5 	C 	K 	T 	
			30 					
			40 					

Examples



X22205C ---



T2220EC ---



T23206A ---



T24306A ---



T25302A ---



T25100A ---

Body

C 2 positions



H 2 positions



A 3 positions



H 3 positions



A 4 positions



H 4 positions



A 5 positions




Options

Colour
Call sales for custom colours.
A full range is available for large orders.


Legend printing
A wide range is available
For all options call sales

Dimensions


C 2 positions




H 2 positions





Cut-out /PCB Matrix




A 3 positions





H 3 positions





A 4 positions



H 4 positions




A 5 positions



2000 Slide Switches - Snap fit and panel mount

10A 250Vac



115/230 is preferred legend

Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

10A 250Vac T85
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118).

2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider			
K 2.8 x 0.8	2	2 Switching positions	10	0	6	C	L
R 2.8 x 0.8			20	2	7	D	M
T Solder			30	3	8	E	N
X PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales			3 Switching positions	40	4	9	H
	10	5		A	K	R	
	20	S		T			
	30						
	40						

Examples



T22208E ---



T22308E ---



T2230MF ---



T22205B ---



T22305B ---



T23204B ---

Body


B

With mounting holes





E

Snap fit



F

Snap fit
(single pole ON OFF only)




Options

Colour


Call sales for custom colours.
A full range is available for large orders.
Standard body colour is black.

Dimensions



2 Pos B



3 Pos B





2 Pos E



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

2 Pos F



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65