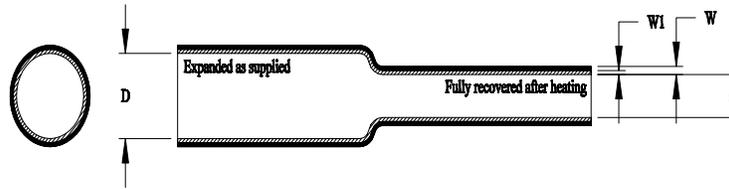


## TAK-Sleeve Adhesive-Lined Modified PVDF Tubing



**Table 1: Dimensions** (inches)

Size	Expanded Inside Diameter (D)	Recovered Inside Diameter Maximum (d)	Recovered Wall with Adhesive Minimum (W)	As Supplied Adhesive Thickness Nominal (W1)
1/8	0.125 min	0.040	0.019	0.005
3/16	0.187 min	0.070	0.021	0.005
1/4	0.250 min	0.105	0.018	0.005
3/8	0.375 min	0.165	0.019	0.005
1/2	0.500 min	0.250	0.025	0.005
No. 1	0.500 min	0.250	0.025	0.013
No. 2	0.750 min	0.250	0.035	0.010
No. 3	0.205 min	0.070	0.021	0.005
No. 4	0.220 ± 0.010	0.095	0.019	0.010

**Color:** Natural.

**Material:** The tubing shall be fabricated from modified polyvinylidene fluoride with an interior coating of thermoplastic adhesive.

**Requirements:** Except for dimensions as listed above, the outer jacket shall meet all the requirements of Raychem Specification RW-3029/2.

CUSTOMER DRAWING

	Tyco Electronics Corporation 305 Constitution Drive Menlo Park, CA 94025 USA		<b>Raychem Tubing</b>	Title: <b>TAK-Sleeve Adhesive-Lined Modified PVDF Tubing</b>		
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for the application			Document No : <b>TAK-Sleeve</b>		
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 08-Aug-08	Rev.: G	Sheet: 1 of 1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TAK-SLEEVE-NO.1-X-STK](#) [TAK-SLEEVE-NO.2-X-STK](#) [TAK-SLEEVE-1/4-X-STK](#)