

Features

- ◆ Highest power density in SIP package
- ◆ Wide 2:1 input voltage range
- ◆ Ultra-compact SIP-8 package
- ◆ Smallest footprint 9W converter
- ◆ Full SMD design
- ◆ Temperature range -40° to $+85^{\circ}\text{C}$
- ◆ High efficiency up to 90%
- ◆ Indefinite short-circuit protection
- ◆ I/O isolation 1600 VDC
- ◆ Remote On/Off control
- ◆ Fully RoHS compliant
- ◆ 3-year product warranty



The TMR-9 series is a new family of isolated 9W dc-dc converter modules with regulated output, featuring wide 2:1 input voltage ranges. The product comes in a ultra-compact SIP-8 metal package with a small footprint occupying only 2.0 cm² (0.3 square in.) of board space.

An excellent efficiency allows -40° to $+60^{\circ}\text{C}$ operation temperatures without derating. Further features include remote On/Off control and continuous short circuit protection. The very compact dimensions of these converters make them an ideal solution for many space critical applications in communication equipment, instrumentation and industrial electronics.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TMR 9-1210	9 – 18 VDC (12 VDC nominal)	3.3 VDC	2000 mA	81 %
TMR 9-1211		5 VDC	1600 mA	85 %
TMR 9-1219		9 VDC	1000 mA	87 %
TMR 9-1212		12 VDC	750 mA	88 %
TMR 9-1213		15 VDC	600 mA	89 %
TMR 9-1215		24 VDC	375 mA	89 %
TMR 9-1221		± 5 VDC	± 800 mA	85 %
TMR 9-1222		± 12 VDC	± 375 mA	88 %
TMR 9-1223		± 15 VDC	± 300 mA	89 %
TMR 9-2410		18 – 36 VDC (24 VDC nominal)	3.3 VDC	2000 mA
TMR 9-2411	5 VDC		1600 mA	85 %
TMR 9-2419	9 VDC		1000 mA	88 %
TMR 9-2412	12 VDC		750 mA	89 %
TMR 9-2413	15 VDC		600 mA	90 %
TMR 9-2415	24 VDC		375 mA	90 %
TMR 9-2421	± 5 VDC		± 800 mA	86 %
TMR 9-2422	± 12 VDC		± 375 mA	89 %
TMR 9-2423	± 15 VDC		± 300 mA	87 %
TMR 9-4810	36 – 75 VDC (48 VDC nominal)		3.3 VDC	2000 mA
TMR 9-4811		5 VDC	1600 mA	85 %
TMR 9-4819		9 VDC	1000 mA	88 %
TMR 9-4812		12 VDC	750 mA	89 %
TMR 9-4813		15 VDC	600 mA	89 %
TMR 9-4815		24 VDC	375 mA	89 %
TMR 9-4821		± 5 VDC	± 800 mA	86 %
TMR 9-4822		± 12 VDC	± 375 mA	87 %
TMR 9-4823		± 15 VDC	± 300 mA	87 %


General Specifications

Reliability, calculated MTBF (MIL-HDBK217F)		>2.9 Mio h
Isolation voltage (60sec.)	- Input/Output	1600 VDC
Isolation capacitance	- Input/Output	50 pF max.
Isolation resistance	- Input/Output (500 VDC)	>1 GOhm
Switching frequency	single output models: dual output models:	400 kHz typ. 500 kHz typ.
Remote On/Off	- On: - Off: - Off stand by input current	open or high impedance 2...4 mA current applied via 1KOhm resistor 2.5 mA max.
Safety standards	- Certification documents	IEC/EN 60950-1, UL 60950-1 www.tracopower.com/overview/tmr9
Altitude during operation		tbd
Environmental compliance	- Reach - RoHS	www.tracopower.com/overview/tmr9 RoHS directive 2011/65/EU

Physical Specifications

Casing material	copper
Potting material	silicone, (UL 94V-0 rated)
Weight	5.9 g (0.21oz)

Outline Dimensions

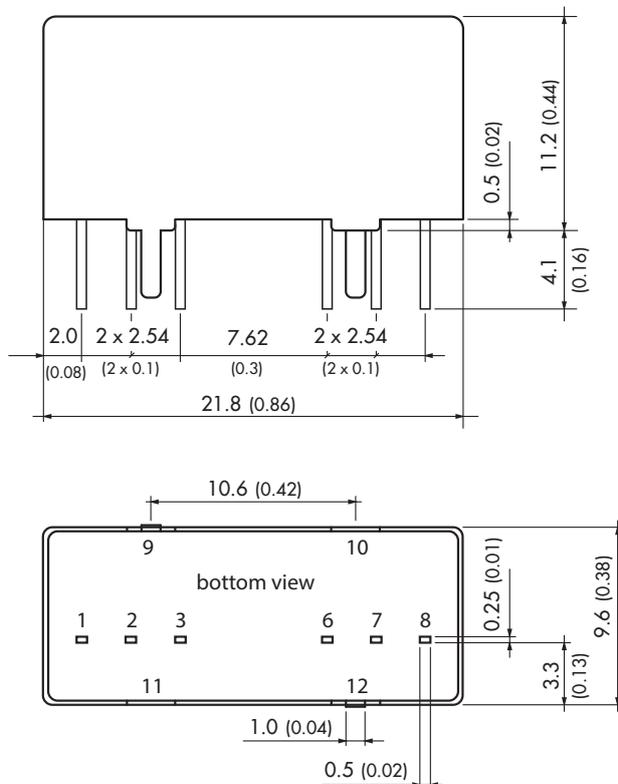

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
6	+Vout	+Vout
7	-Vout	Common
8	No function	-Vout
9	Case	Case
10	Stand off	Stand off
11	Stand off	Stand off
12	Case	Case

Dimensions in [mm], () = Inch
Tolerances: ±0.5 (±0.02)
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TMR 9-4811](#) [TMR 9-4812](#) [TMR 9-1210](#) [TMR 9-4823](#) [TMR 9-4815](#) [TMR 9-1213](#) [TMR 9-2411](#) [TMR 9-2421](#) [TMR 9-4813](#) [TMR 9-2413](#) [TMR 9-2422](#) [TMR 9-2410](#) [TMR 9-2419](#) [TMR 9-4810](#) [TMR 9-2415](#) [TMR 9-2423](#) [TMR 9-2412](#) [TMR 9-1219](#) [TMR 9-1212](#) [TMR 9-1215](#) [TMR 9-1222](#) [TMR 9-1221](#) [TMR 9-1211](#) [TMR 9-4822](#) [TMR 9-4819](#) [TMR 9-1223](#) [TMR 9-4821](#)