


- NOTES:
- 1.0 ELECTRICAL SPECIFICATIONS:
    - 1.1 FREQUENCY RANGE: DC to 12.4 GHz
    - 1.2 INPUT POWER: 2 WATTS AVG AT +25°C  
DERATED LINEARLY TO 0.5 WATTS AT +125°C.
    - 1.3 PEAK POWER: 0.25 KW (5 MICROSECOND PULSE WIDTH)
    - 1.4 VSWR:
      - 1.4.1 DC to 8.0GHz: 1.20:1 MAX.
      - 1.4.2 8.0 to 12.4 GHz: 1.25:1 MAX.
    - 1.5 IMPEDANCE: 50 OHMS
    - 1.6 OPERATING TEMP. RANGE:  
-54°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN  
(REF.: INK-02729-27-02)

4.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

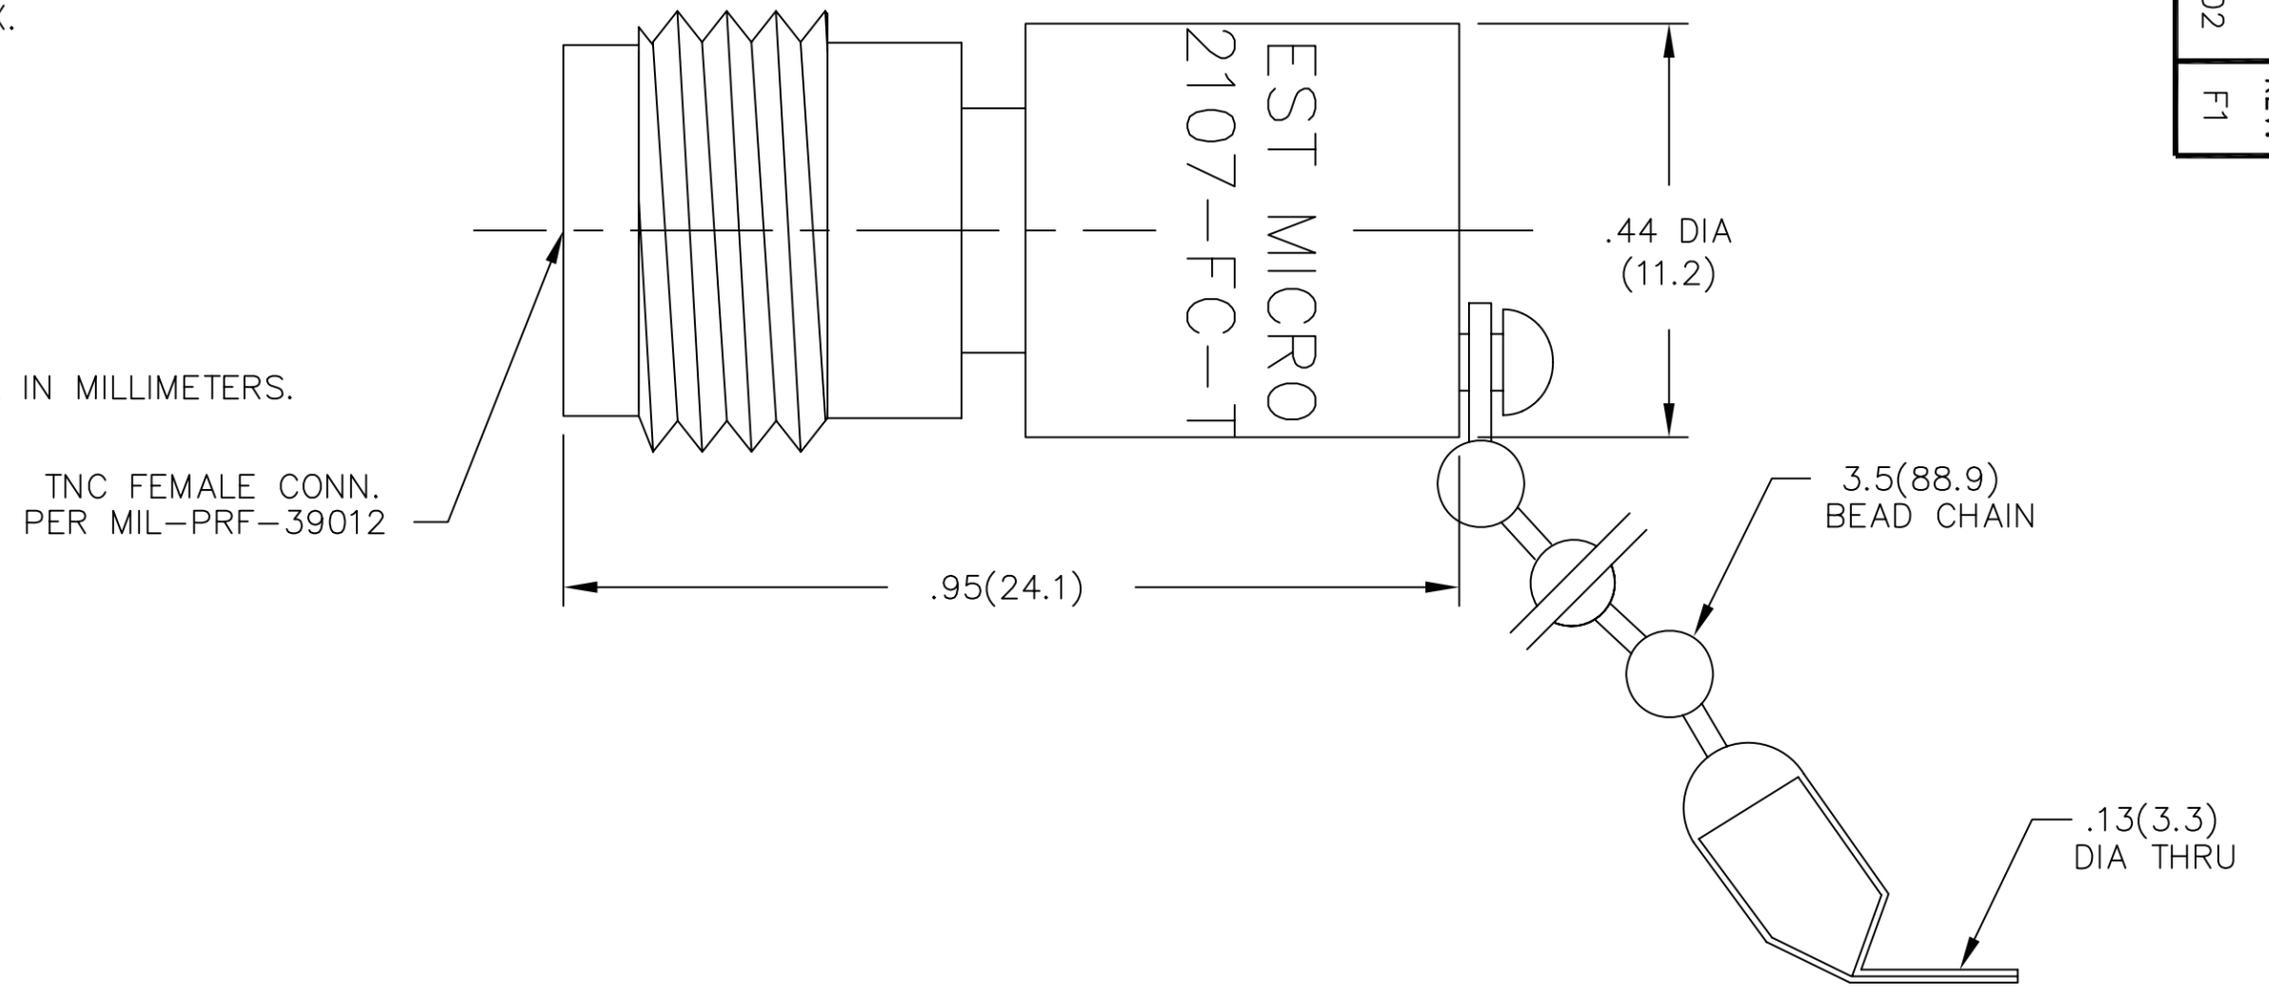

REV.	DESCRIPTION	DATE
-	RELEASED	1/26/79
A	ECR 6545	6/30/79
B	ECR 7129	2/23/90
C	ECR 6933	4/6/90
C1	REDRAW ON B-SIZE	2/15/91
C2	REVISE FINISH CODE	6/10/91
D	REDRAW ON CAD/ ADD MARKING REQUIREMENTS	10/23/92
E	ECN 12910	9/6/93
F	ECN 13825	8/12/94
F1	ADDED TITLEBLOCK	10/31/05

DWG NO. WAS: 02713-01-00

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION - TNC JACK	
	DRAWN/DATE A.BEATTY 10/23/92	ENG./DATE G.KOZAK 11/5/92	DRAWING NUMBER TRM-2107-FC-TNC-02	
	CHECKED/DATE M.HOLLMAN 11/3/92	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[TRM-2107-FC-TNC-02](#)