


Cree High Power Starboards Data Sheet

Power of Cree in Standard and Custom LED Starboards

Illumination Accelerated

Evaluate Cree's latest LEDs
Full range of white and color options
Easy to use setup
Prototype faster, test multiple options
Flexibility for easy integration

Detailed Labeling

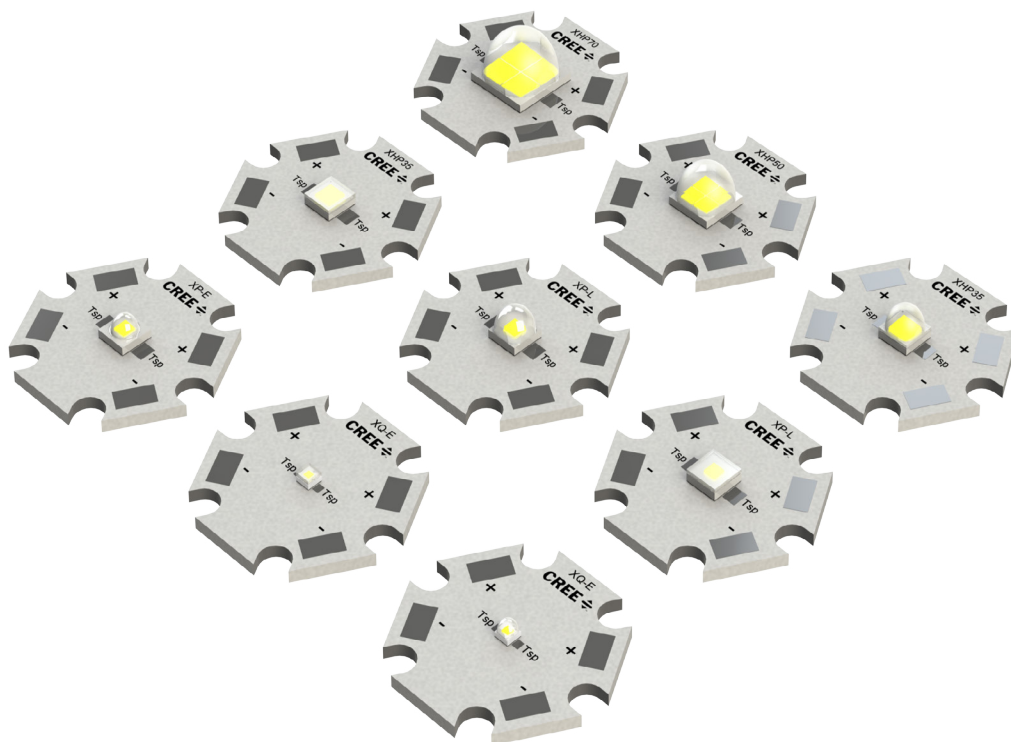

Built with proven Cree XLamp LED technology, the Cree star board series from Opulent North America delivers high efficacy across a range luminous flux options in a small, easy to use setup. These starboard configurations are tested, ensuring optimal performance. Star boards allow for flexibility, rapid prototyping and sampling of the latest LEDs in an easy to use footprint.

Features and Benefits

- Cree SC5 Technology available
- 70 and 80 CRI available
- 2700-6500K CCT
- Metal Core PCB for optimal thermal dissipation
- Configurable with a variety off-the-shelf optics

Cree High Power Starboards

White Product Selection Guide

Link to Cree Datasheet	Part Number	CCT	CRI	Luminous Flux (lm)	
	XQ-E HI	XQEAWT-00-0000-00000HBE8-SB01	2700K	80	93.9
	XQ-E HI	XQEAWT-00-0000-00000HDE5-SB01	4000K	80	107
	XQ-E HD	XQEAWT-H0-0000-00000HDE8-SB01	2700K	80	107
	XQ-E HD	XQEAWT-H0-0000-00000LE-SB01	4000K	75	114
	XQ-E HD	XQEAWT-H0-0000-00000BFE1-SB01	6500K	70	122
	XHP35 HD	XHP35A-H0-0000-0D0HC20E8-SB01	2700K	80	440
	XHP35 HD	XHP35A-H0-0000-0D0HC40E5-SB01	4000K	80	475
	XHP35 HD	XHP35A-H0-0000-0D00D20E1-SB01	6500K	70	510
	XHP35 HI	XHP35A-00-0000-0D0HC40E8-SB01	2700K	80	475
	XHP35 HI	XHP35A-00-0000-0D00E20E5-SB01	4000K	70	590
	XHP35 HI	XHP35A-00-0000-0D0BE40E1-SB01	6500K	70	635
	XP-L HI	XPLAWT-H0-0000-000HU40F8-SB01	2850K	80	340
	XP-L HI	XPLAWT-H0-0000-000BV20E5-SB01	4000K	70	400
	XP-L HI	XPLAWT-H0-0000-0000V20E1-SB01	6500K	70	400
	XP-L HD	XPLAWT-00-0000-000HU60E8-SB01	2700K	70	380
	XP-L HD	XPLAWT-00-0000-000BV50E5-SB01	4000K	80	460

Product performance at binning current Tc = 85°C.

Cree XHigh Power Starboards

White Product Selection Guide

Link to Cree Datasheet	Part Number	CCT	CRI	Luminous Flux (lm)	
XP-L HD	XPLAWT-00-0000-0000V60E1-SB01	6500K	70	480	
	XHP50	XHP50A-00-0000-0D0HH227G-SB01	2700K	80	900
	XHP50	XHP50A-00-0000-0D0BJ440E-SB01	4000K	70	1120
	XHP50	XHP50A-00-0000-0D0BJ40E1-SB01	6500K	70	1120
	XHP70	XHP70A-00-0000-0D0HM227G-SB01	2700K	80	1380
	XHP70	XHP70A-00-0000-0D0BN20E5-SB01	4000K	70	1590
	XHP70	XHP70A-00-0000-0D0BN40E1-SB01	6500K	70	1710

Product performance at binning current $T_c = 85^{\circ}\text{C}$.


Color Product Selection Guide

Link to Cree Datasheet	Part Number	Color	DW	Luminous Flux (lm)
	XPEBAM	Amber	585-595	80.6
	XPEBBL	Blue	465-485	47.5
	XPEBGR	Green	520-535	130
	XPEBRD	Red	620-630	80.6
	XPEBPA	PC Amber	Y2	107

Product performance at binning current $T_c = 25^{\circ}\text{C}$.

Cree XHigh Power Starboards

Specialty Color Product Selection Guide

Link to Cree Datasheet	Part Number	Color	DW	Radiant Flux (mW)
 XPEFAR	XPEFAR-L1-0000-00601-SB01	Far Red	720-740	210
XPEPHR	XPEPHR-L1-0000-00901-SB01	Photo Red	650-670	350
XPEBRY	XPEBRY-L1-0000-00R01-SB01	Royal Blue	450-465	625
XPEBRD	XPERDO-L1-0000-00A01-SB01	Red Orange	620-630	80.6

Product performance at binning current $T_c = 25^\circ\text{C}$.

MPCB Fabrication

- 2oz copper
- 5052 Al
- White solder mask
- Lead free Immersion Gold

Intended for connection to a class 2 power source with a maximum operating voltage of 50 Vdc.

Maximum Ratings

See Cree's Datasheets [HERE](#)



Max Solder Point Verse Drive Current

See Cree's Datasheets [HERE](#)

Thermal Interface Guidance

Current derating must be observed to maintain junction temperature below the maximum, see Cree's application note for additional information on thermal management guidelines [HERE](#)

Opulent North America Starboard Mechanical

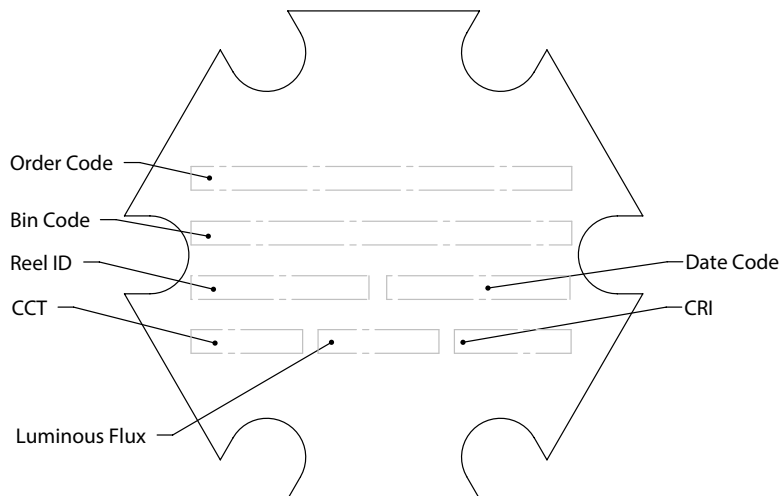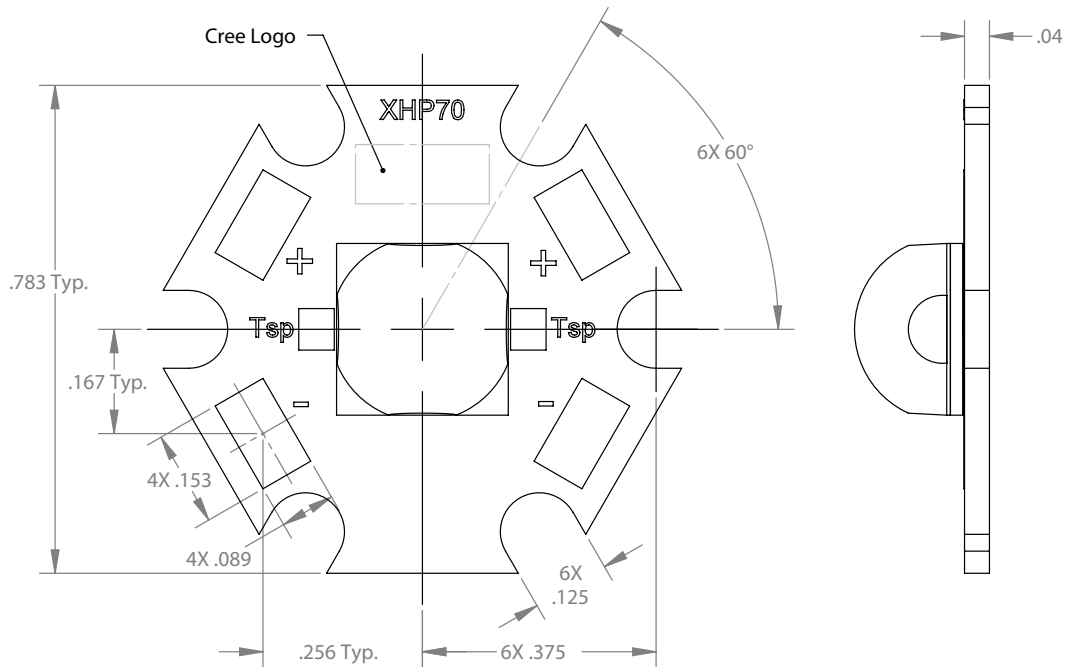

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Opulent North America:

[XHP35A-H0-0000-0D0BE450E -SB01](#) [XHP50A-00-0000-0D0BH430E -SB01](#) [XPEBRD-L1-0000-00901-SB01](#)
[XHP35A-00-0000-0D0BE450E -SB01](#) [XPEBAM-L1-0000-00901-SB01](#) [XHP50A-00-0000-0D0BJ440E -SB01](#)
[XQEAWT-02-0000-00000HBE8-SB01](#) [XPLAWT-H0-0000-0000V20E1-SB01](#) [XHP70A-00-000-0D0BN450E -SB01](#)
[XPLAWT-H0-0000-000BV20E5-SB01](#) [XPLAWT-00-0000-000HU60E8-SB01](#) [XHP35A-00-0000-0D0BE240E -SB01](#)
[XHP35A-00-0000-0D0BD430E -SB01](#) [XPEBBL-L1-0000-00301-SB01](#) [XPEBGR-L1-0000-00G01-SB01](#) [XPEFAR-L1-](#)
[0000-00601-SB01](#) [XQEAWT-02-0000-00000HDE5-SB01](#) [XPEBRY-L1-0000-00R01-SB01](#) [XPLAWT-00-0000-](#)
[000BV50E5-SB01](#) [XHP35A-H0-0000-0D0BE240E -SB01](#) [XHP35A-H0-0000-0D0BD430E -SB01](#) [XPERDO-L1-0000-](#)
[00A01-SB01](#) [XPEBPA-L1-0000-00D01-SB01](#) [XPEPHR-L1-0000-00901-SB01](#) [XPLAWT-H0-0000-000HU40F8-SB01](#)
[XHP70A-00-0000-0D0BN240E -SB01](#) [XHP50A-00-0000-0D0BJ450E -SB01](#) [XPLAWT-00-0000-0000V60E1-SB01](#)